
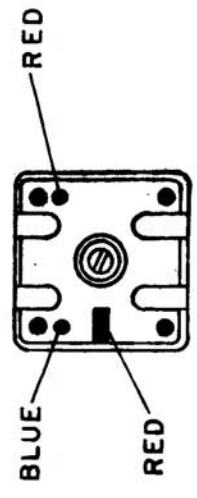



RE PER UNIT	1	USED ON	AC183 Ø
MODEL	YLRB-1	ASSY. NO.	A 3653
		DATE	4-12-65



ELECTRICAL SPECS.
(WITH SLUG INSERTED)


OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MC
PRIMARY: 6.3 UH ±.1UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 6.5 MC >:80

MECHANICAL SPEC.

URNS

PRIMARY: 23
SECONDARY: —
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

SCHEMATIC



REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	M	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	STOCK SIZE	COIL, RF, ADJUSTABLE	
	MATERIAL		
	TYPE & TEMPER	DRAWN	
	HEAT TREAT. SPEC.	CHECKED	
	DATE	FINAL APPROVAL	
	CH. NO.		
	DRAFTS		
	CHECKER		
	ENG. APP.		
	SCALE		
Ø	4/30/65	ORIGINAL RELEASE FOR PRODUCTION	
X	4/12/65	EXPER. RELEASE	
SYM	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			
DECIMALS	FRACTIONS		
.X ± .05	± 1/64		
.XX ± .01	ANGLES		
.XXX ± .005	± 0° 30'		
TOLERANCES	CODE	A 2-A 3890	
		AC183 Ø	