

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

WINDING.

31 TURNS OF ITEM 2
UNIVERSAL WOUND

MACHINE DATA


DRIVER GEAR 69
CAM GEAR 105
CAM .250

ELECTRICAL DATA

L - 13.2 mhy (11.9-14.5)
Q - > 110
F - 2.5 MC

FABRICATION

STAKE LEADS WITH ITEM 4
BAKE DRY AT 100° F
SOLDER LEADS AS SHOWN
COAT WITH ITEM 3
BAKE DRY AT 100° F
COLOR CODE AS SHOWN

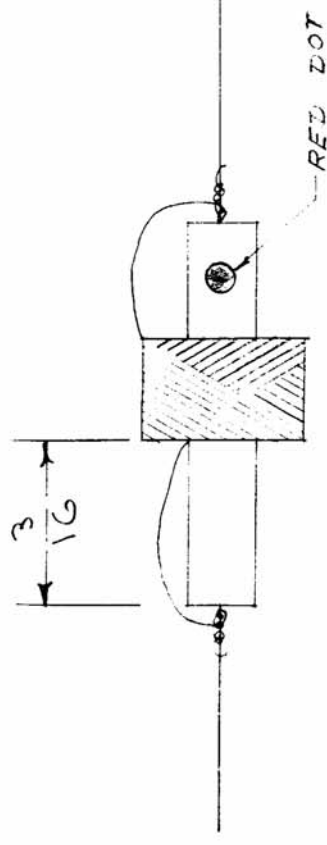

A-1077 D

USED ON	
REQ. PER UNIT	PROJECT NO.
1	GPR
	ASSY. NO.
	DATE
	8/2/55

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 5	BS-100	SOLDER, SOFT	
X A	GL-103	CEMENT	
X 3	GL-102	Q-MAX	
X 2	WI-104-541-SCQS	WIRE, LITZ	
1	CI-114	CORE, POWDERED IRON	

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, HIGH PASS FILTER
L29
GPR

COIL 8/2/55
ELEC. DES. APP. G.T.O.
MECH. DES. APP. W.D.

DRAWN
CHECKED
FINAL APPROVAL

A-1077 D

ISSUE ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS CHECKER	ENG. APP.
D	31 TURNS WAS 30 T	7/31/56	4	JAD PJK	A.J.J.
C	TOL. ADDED TO L29 WAS 130	5/15/56	3	JAD GSH	A.J.J.
B	ITEM 1 WAS CF-116	11/31/56	2	JAD	A.J.J.
A	L T G TOL. ADDED	7/31/56	1	JAD	W.D.

SCALE
TOLERANCES
DEC. DIM. ±
ALL FRACTIONAL DIM. ±
OTHERS AN ULAR DIM. ±

DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.