


NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
THE TECHNICAL MATERIEL CORPORATION  
MAMARONECK, NEW YORK

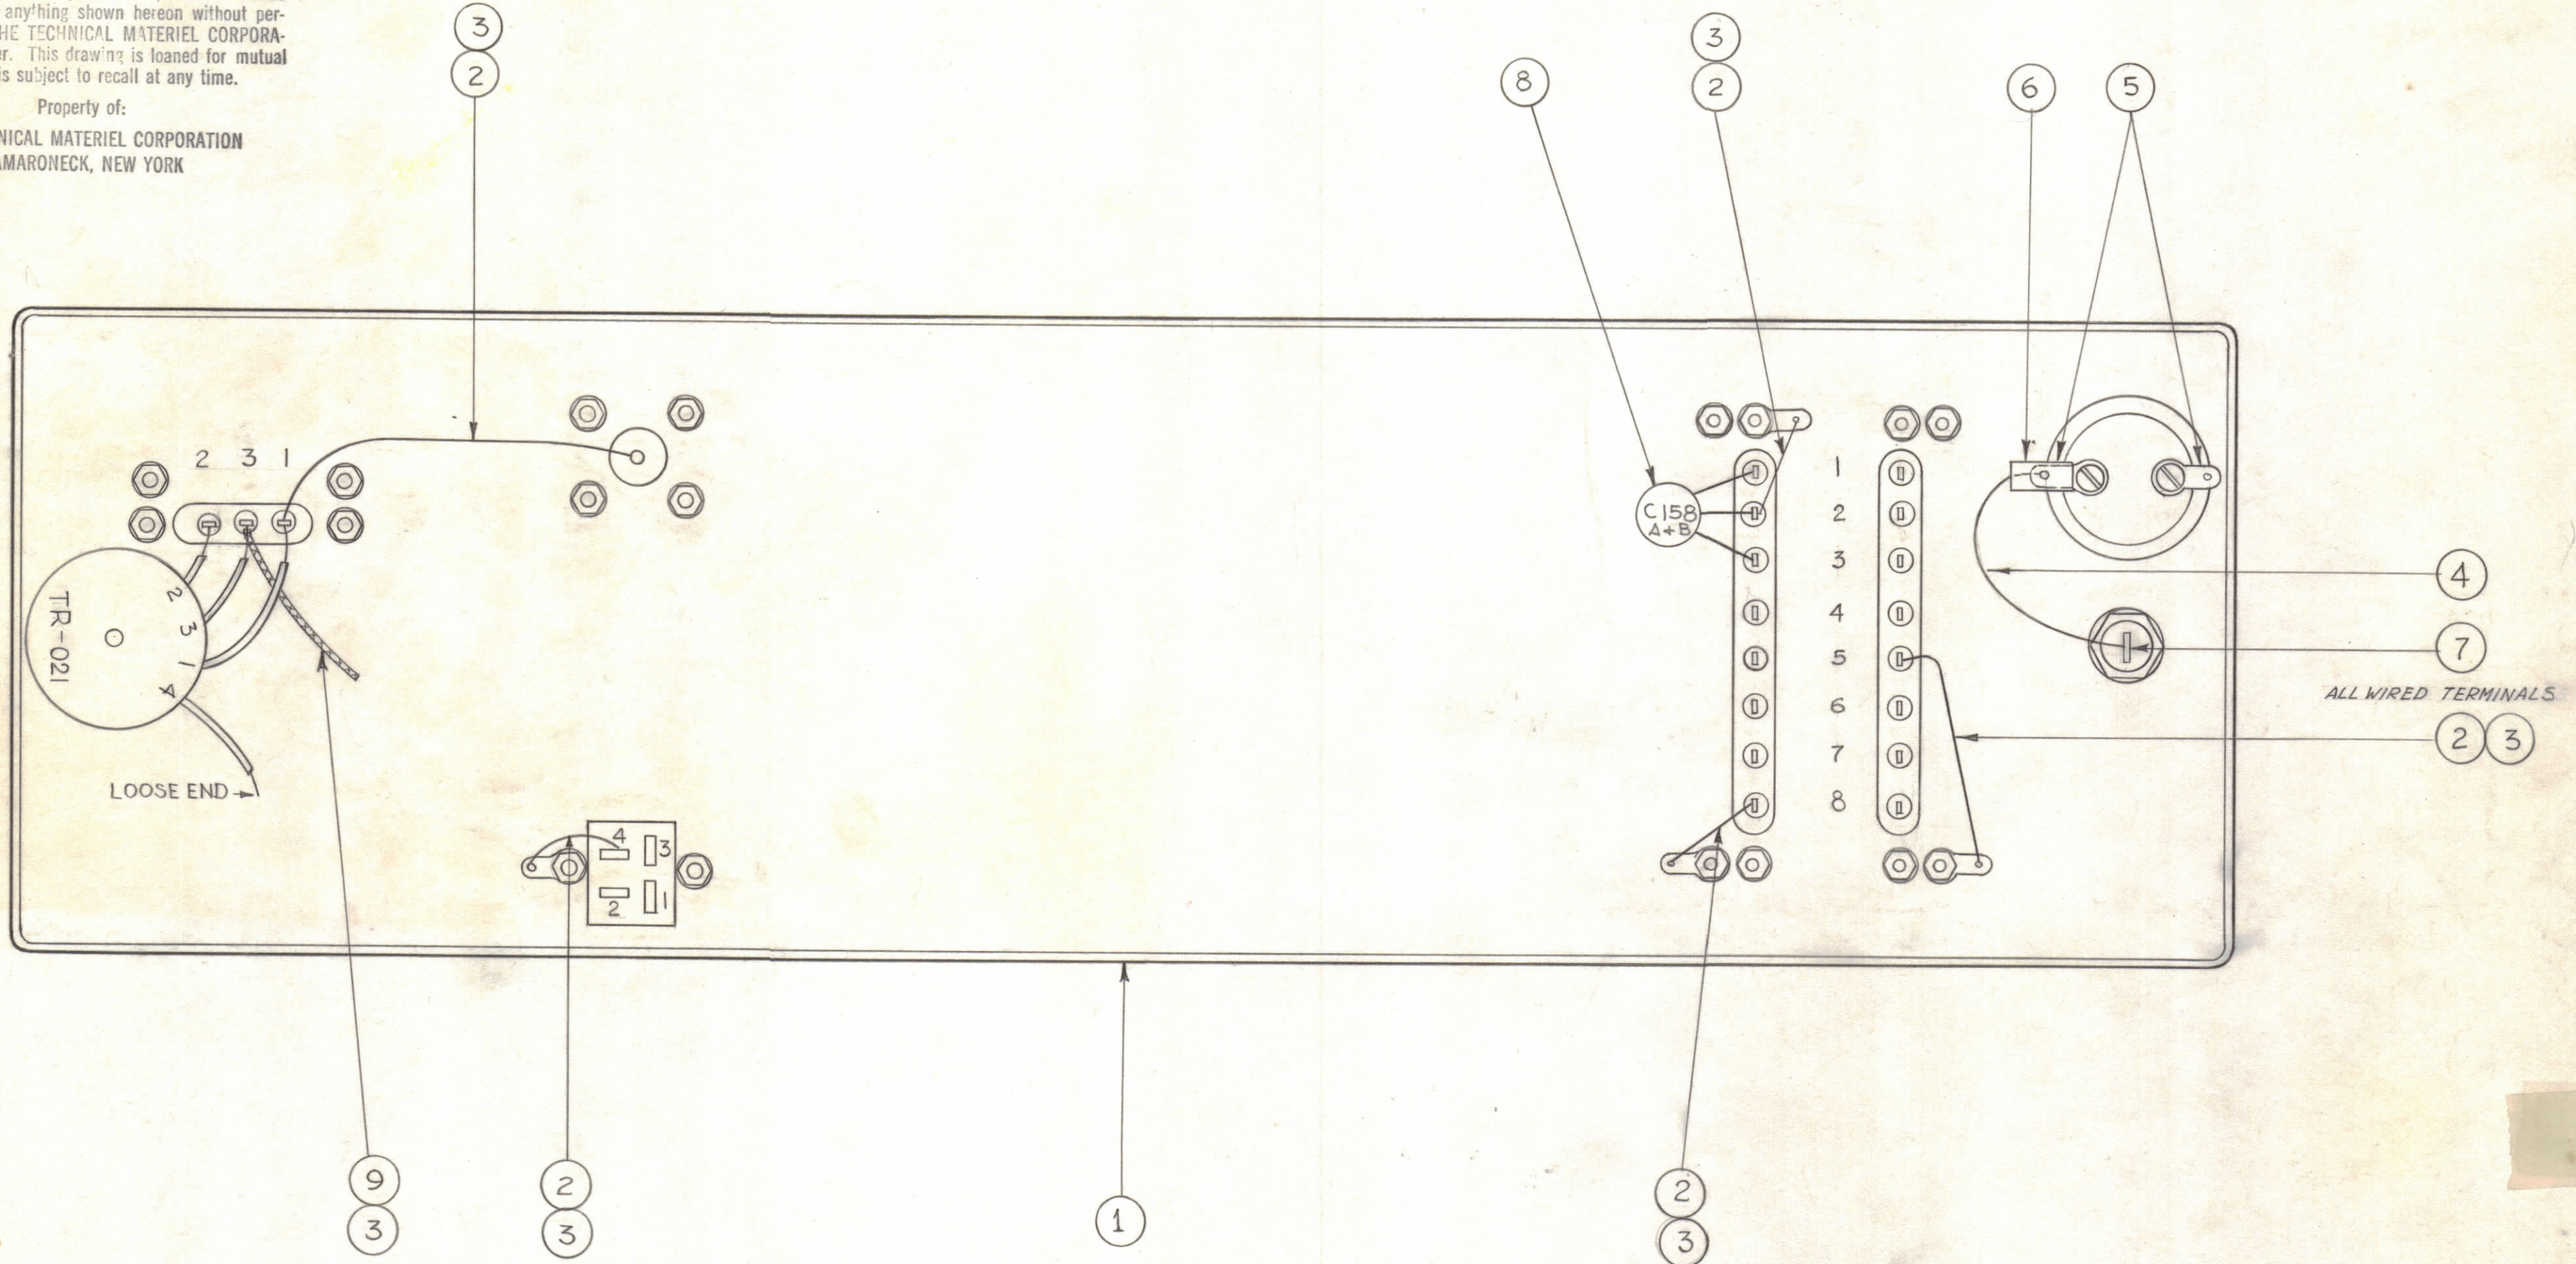

NOTE - THIS DRAWING SHOWS ONLY THOSE COMPONENTS NECESSARY TO SHOW JUMPER WIRE CONNECTIONS. STRIP ITEM (7) 3/8" BOTH ENDS.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
3"	9	WL-103-1	SHIELD, FLEXIBLE	
1	8	CC-100-23	CAPACITOR, FIXED 2 x .01	C158 A+B
X	7	BS-100	SOLDER, SOFT	
5/8"	6	PX-100-1-118	INSULATION, SLEEVING	BLACK
2	5	TE-113-149	LUG, TERMINAL	
4 1/2"	4	MWC22(7)U9	CABLE, INSULATED	WHITE
6"	3	PX-104-1-.034	INSULATION, SLEEVING	BLACK
18"	2	WL-100-7	WIRE, BUSS BAR	
1	1	A-2150	CHASSIS FRAME ASSY.	

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
		UNLESS OTHERWISE SPECIFIED:	SCALE				
		DIMENSIONS ARE IN INCHES	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES				
		TOLERANCES ON FRACTIONS ± 1/64	DECIMALS ± .005		ANGLES ± 1/2°		

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
	FFR-35			9-19-61
	FFR-35			

TYPE & TEMPER	HEAT TREAT. SPEC.	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	SHEET OF
					A-2181