
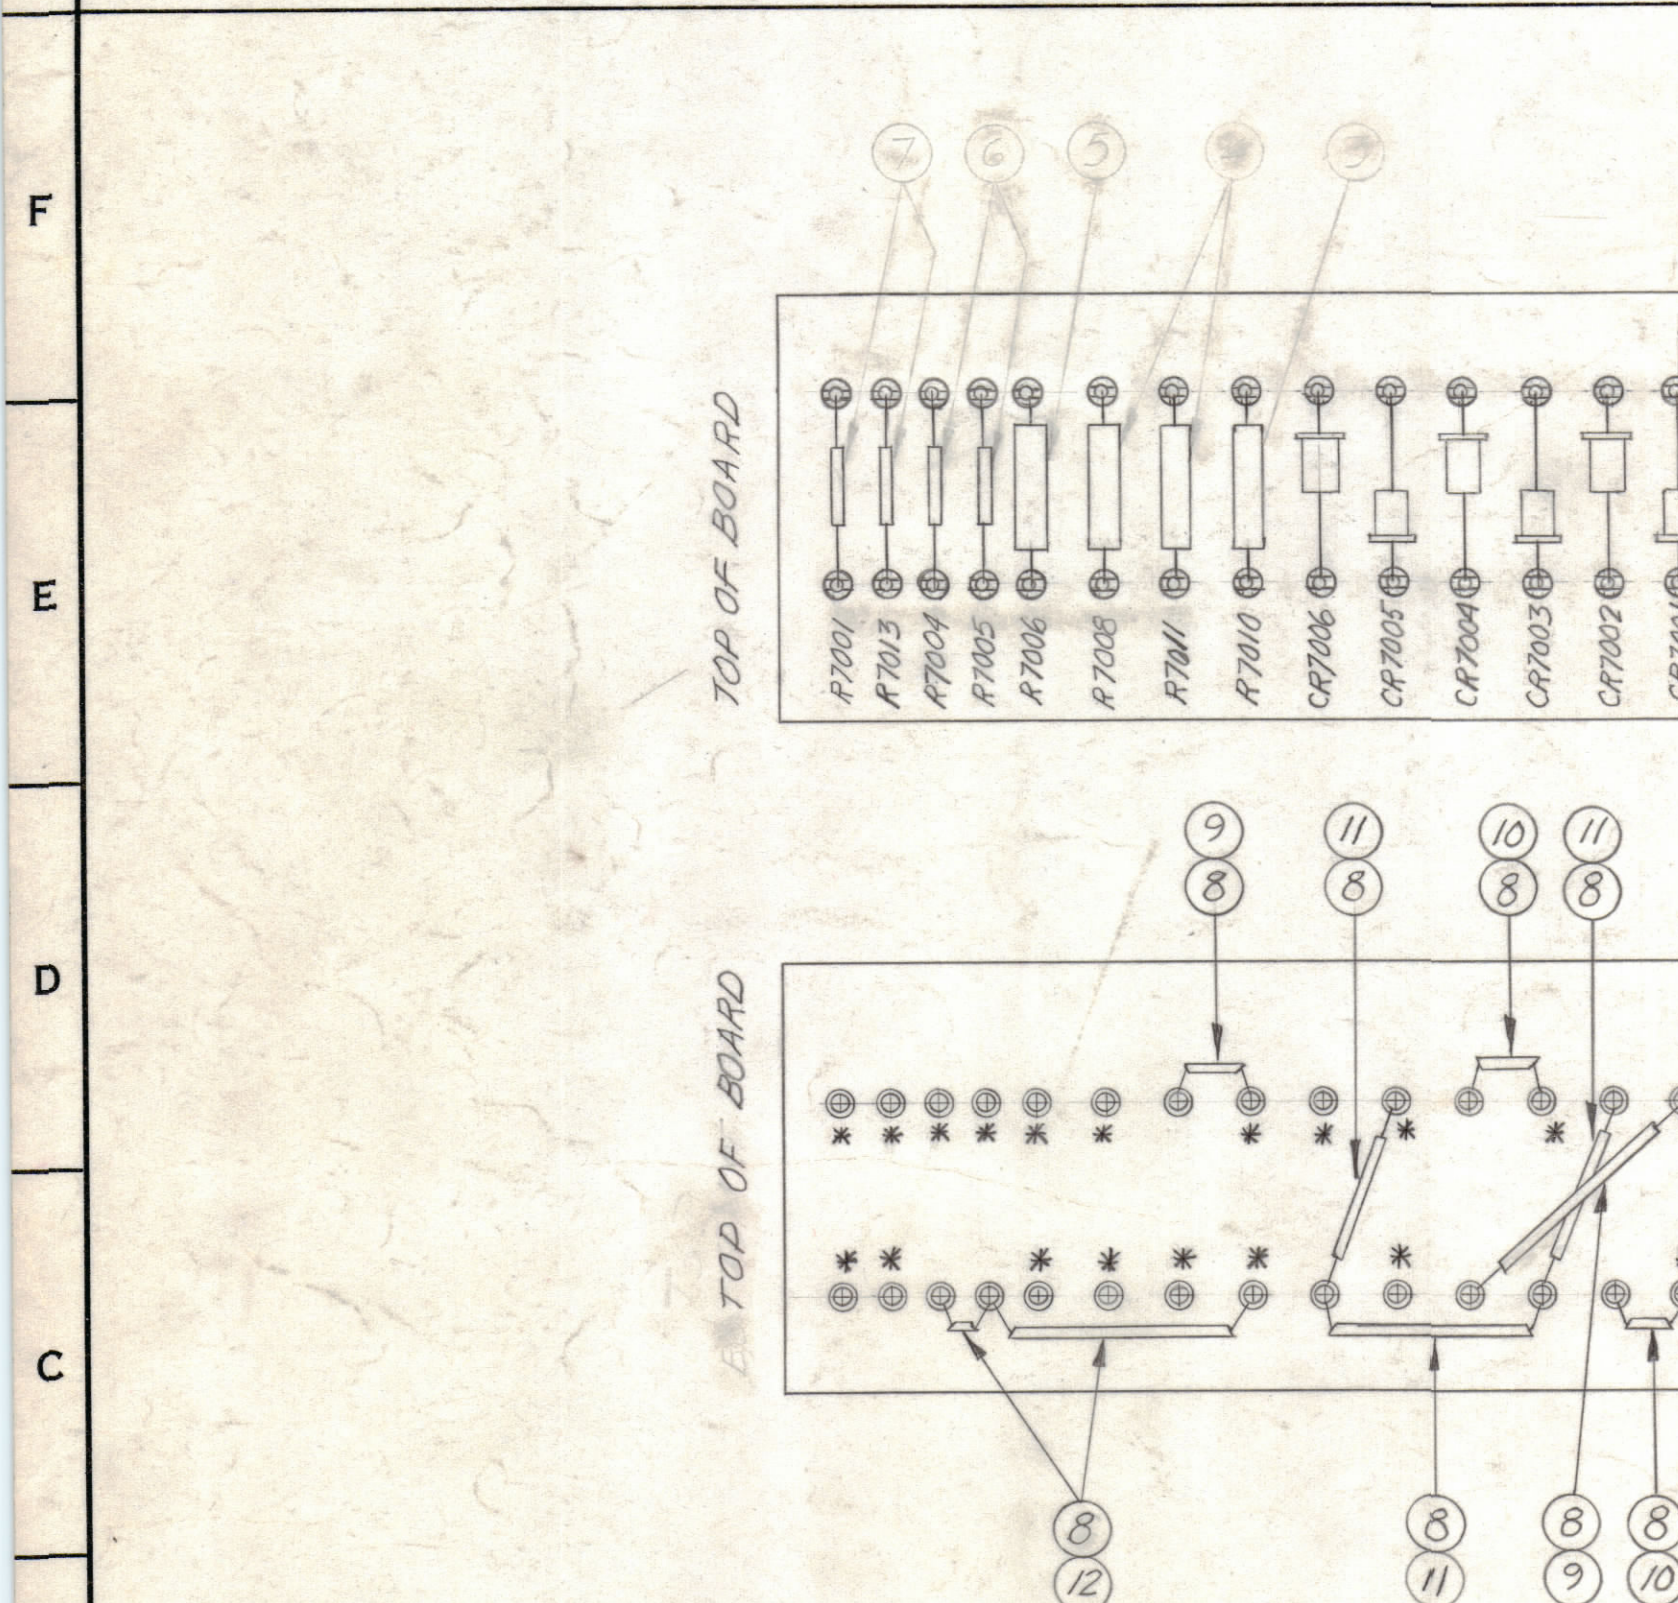
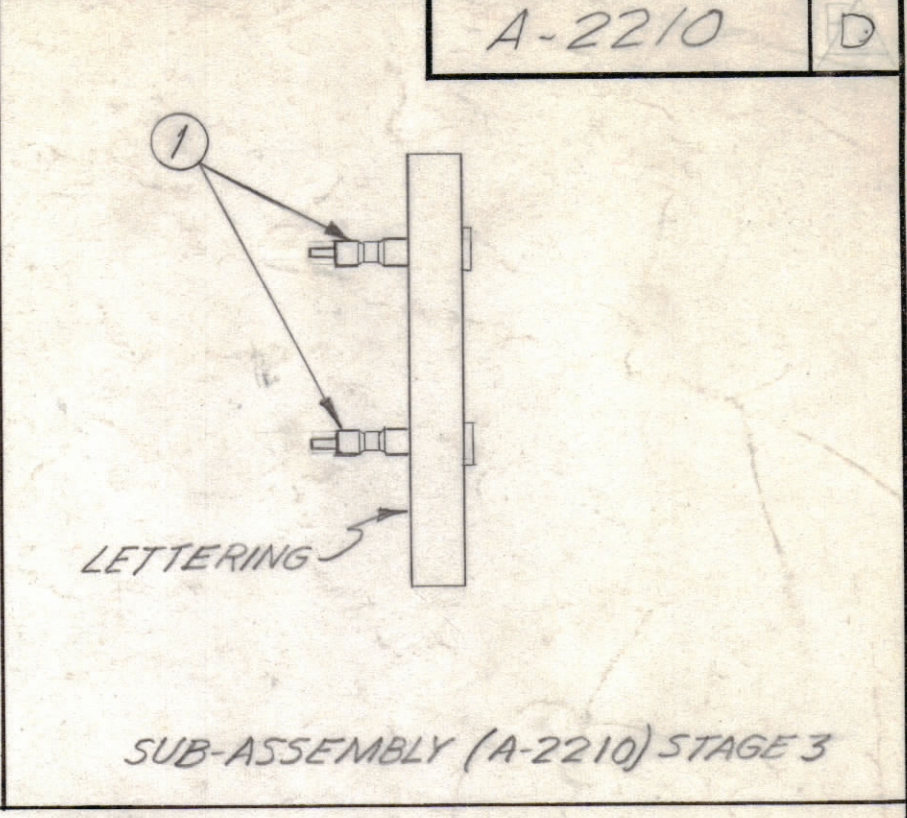



**HOLES:**  
 A-5/32 DIA. (4 REQ)  
 B-.116 DIA. (28 REQ)

**MATERIAL:** 1/8 PHENOLIC XXXP (NATURAL)  
**MACHINING (A-2210) STAGE 1**

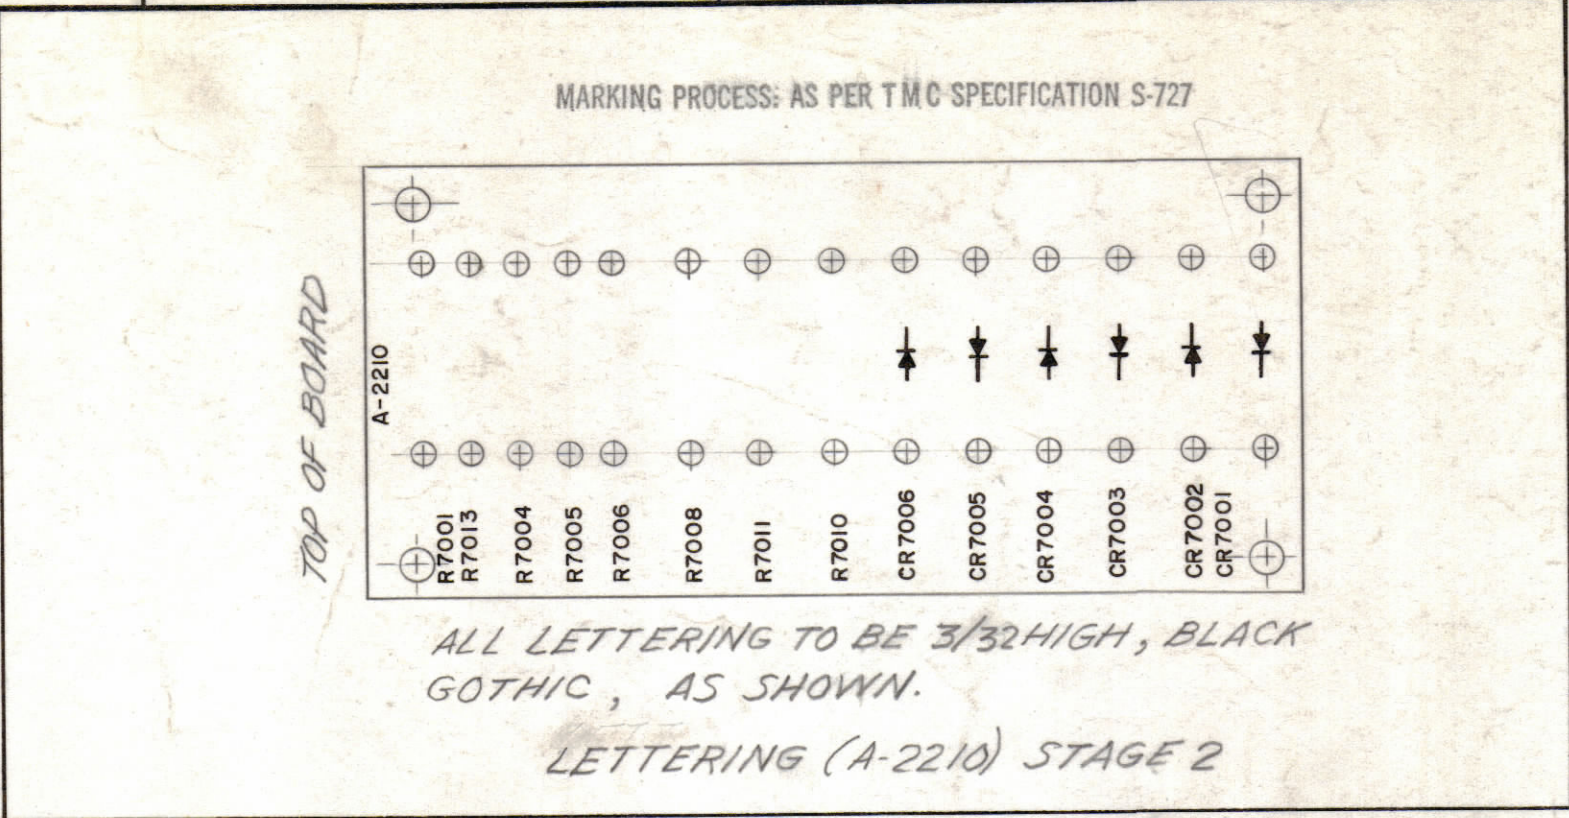

**FINAL ASSEMBLY (A-2210) STAGE 4**

**NOTE:**  
 \* - INDICATES NO SOLDER UNTIL ASSEMBLY IN UNIT.

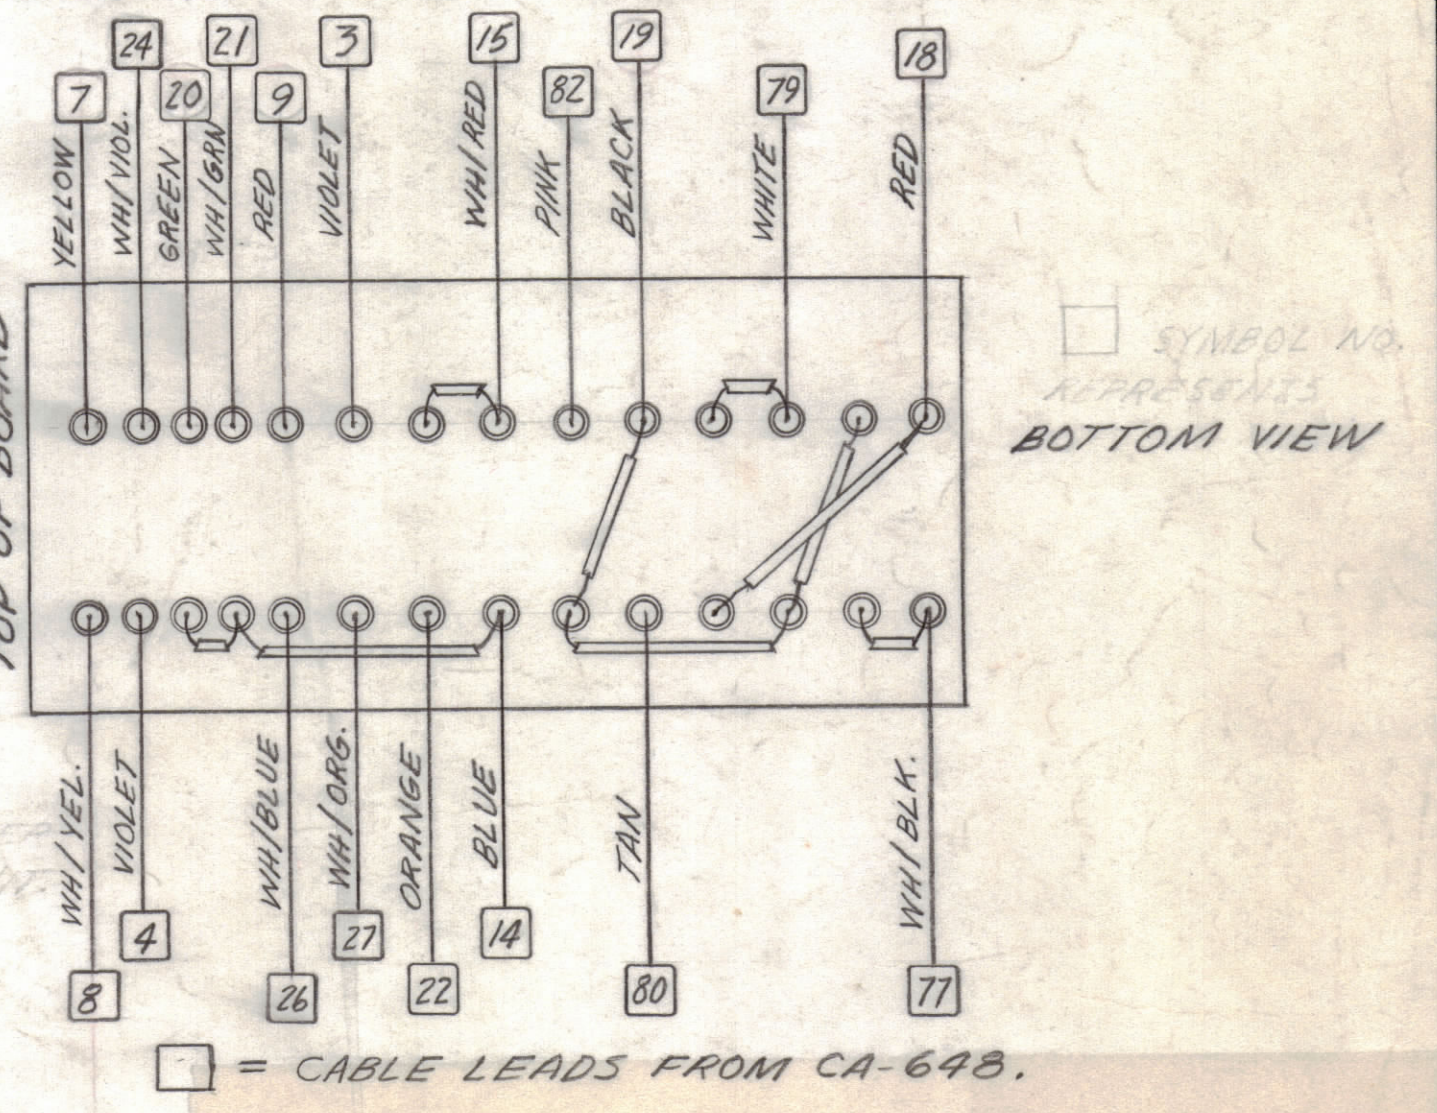

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
D		IF 14 ADDED, ITEM NO. 7, SYN. R7001 DELETED	6-22-65	14193	DVM		
C		IT. 9 THRU IT. 12 WAS PX-100-X-XXX	8-31-64	12273	WB		
B	HLES.6	TERMINALS (ITEM 1) WERE ROTATED 90° (STAGES 3&4)	6-4-63	8146	ES		
A	G.H-1	Item 1 Rotated 90° (STAGE 3)	12-26-61	6102	ES		

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	SBS-1	POWER SUPPLY	A-2209-4	10-16-61
USED ON				

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	14	RC20GF220K	RESISTOR, FIXED, COMPOSITION	R7001
X	13	RS100	SOLDER, SOFT	
X	12	PX-104-6-.034	INSULATION, SLEEVING	BLU
X	11	PX-104-1-.034	INSULATION, SLEEVING	BLK
X	10	PX-104-7-.034	INSULATION, SLEEVING	GRY
X	9	PX-104-3-.034	INSULATION, SLEEVING	RED
X	8	WL-100-7	WIRE, BUSS	
1	7	RC20GF100K	RESISTOR, FIXED, CARBON	R7013
2	6	RC20GF102J	RESISTOR, FIXED, CARBON	R-7004 R-7005
1	5	RC42GF683J	RESISTOR, FIXED, CARBON	R7006
2	4	RC42GF333J	RESISTOR, FIXED, CARBON	R-7008 R-7011
1	3	RC42GF473K	RESISTOR, FIXED, CARBON	R7010
6	2	1N547	SILICON RECTIFIER	
28	1	TE-109-3	TERMINAL, TURRET TYPE	

THE TECHNICAL MATERIEL CORP.  
 MAMARONECK, NEW YORK

TERMINAL BOARD AND COMPONENT ASSY  
 POWER SUPPLY SECTION

DRAWN: [Signature] CHECKED: [Signature] FINAL APPROVAL: [Signature]

TYPE & TEMPER. HEAT TREAT. SPEC. FINISH & SPEC. NO. ELEC. DES. APP. MECH. DES. APP. SHEET OF

A-2210 D