


A
A 4582

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	11/12/68		C.V.		
Ø	ORIGINAL RELEASE FOR PRODUCTION	7/17/69		CV		
A	REDRAWN FROM PHOTO TO LINE DWG	10/24/70	20049	GE	W	P.S.A

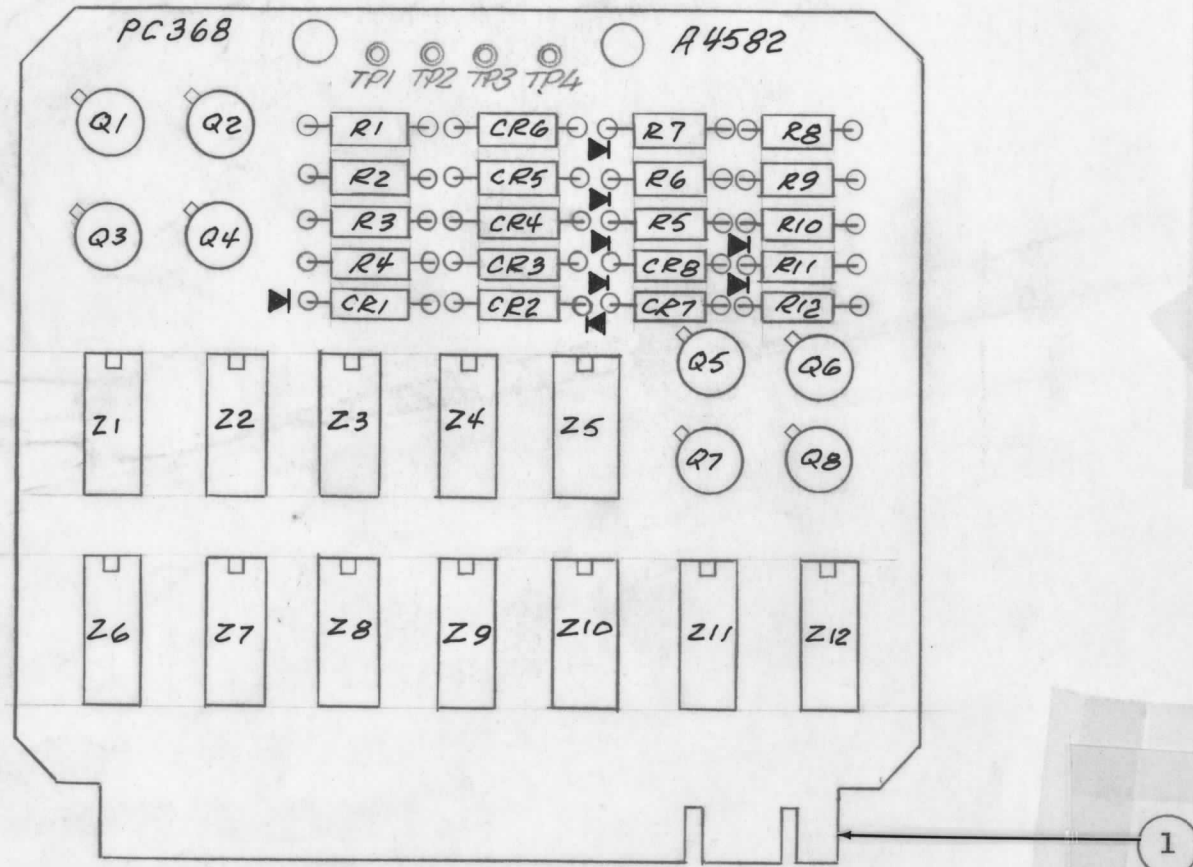

ASSEMBLY NOTES

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH PLATED THRU-HOLES.
2. CAUTION: WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL.
3. CLEAN AND INSPECT AS PER TMC SPEC S676
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A4582.
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.

X	2	BS100	SOLDER, TIN ALLOY	
1	1	PC368	PRINTED CIRCUIT BOARD	
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

De MARCO LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		TITLE PC368 ASSEMBLY		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN <i>K. V. H.</i>	DATE 4/10/69	FINAL APPROVAL <i>J. De Marco</i>
		CHECKED <i>J. De Marco</i>	DATE 7/16/69	DATE 7-17-69
		ELECT. DES.	DATE	
		MECH. DES. <i>K. V. H.</i>	DATE 7-17-69	
				A 4582
				A
				REV. LTR.

1	RTTD-4	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
	A	S401-451

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

TOLERANCES

FRACTIONS
± 1/64
ANGLES
± 0° 30'