


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXP. RELEASE	4-21-67	-	G.D.L	
	X1	UPDATED - STAMP WAS 1/8 HIGH	5-16-67		G.D.L	
	X2	R164, 170, 176, 182, & 188 ADD	8-7-67		G.D.L	
	Ø	ORIG. RELEASE FOR PROD	8-15-67			

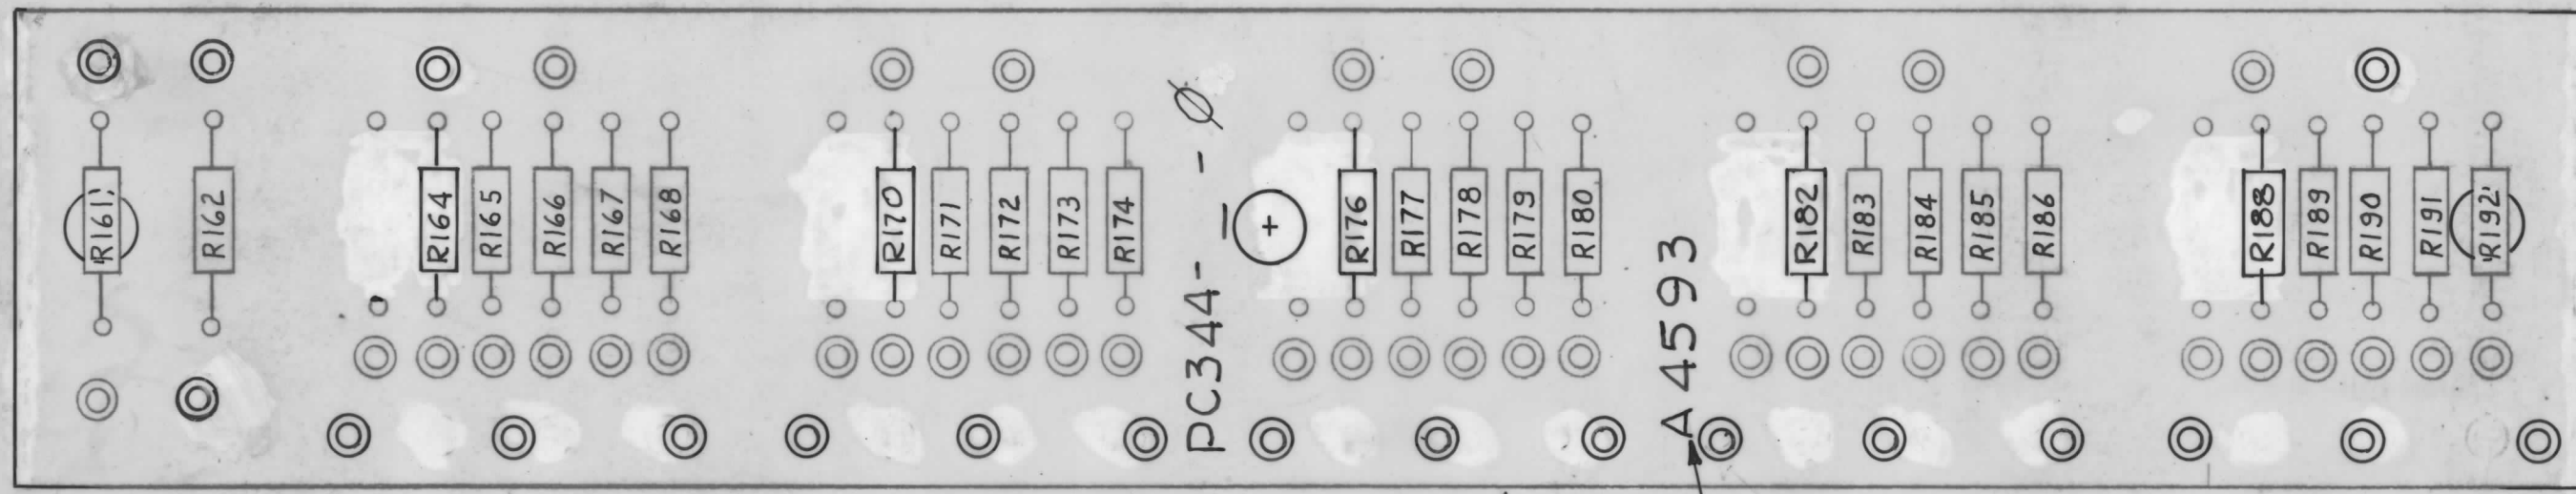

ASSEMBLY NOTES

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH PLATED THRU-HOLES
2. BE CAUTIOUS: WHEN APPLYING HEAT & SOLDER
3. CLEAN & INSPECT AS PER S676
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A4593
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE

STAMP TMC P/No. 3/32 HIGH BLACK GOTHIC - COVER MARKING WITH CLEAR LACQUER

R161, R162, R164 THRU R168
R170 THRU R174, R176 THRU R180,
R182 THRU R186, R188 THRU R192

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
X	3	BS100	SOLDER TIN ALLOY	
27	2	SEE NOTE 4	RESISTOR FIXED COMP.	
1	1	PC344-2	PRINTED CIRCUIT BOARD	

0. POSE LIST OF MATERIAL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

ASSY, RESISTORS PC. BD

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
B	82679	A4593	Ø

SCALE 2:1 SHEET OF

1	MMX-()	BMA103
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
	CODE A	S401-451

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS
.X ± .05	1/64
.XX ± .01	TOLS. ANGLES
.XXX ± .005	0° - 30'

MATERIAL

FINISH

FINAL APPROVAL
MECH. DES. *SPM* DATE *8/16/67*

ELECT. DES. *Kuger* DATE *8/7/67*

CHECKED *[Signature]* DATE *8-15-67*

DRAWN *L. KOLIBABEK* DATE

M/L Aklen 8/16/67