


A  
A 4625

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	11/12/68		C.V.		
Ø	ORIGINAL RELEASE FOR PRODUCTION	8/12/69		W		
A	REDRAWN FROM PHOTO TO LINE DWG	10/21/70	20049		(1)	G.P.E.

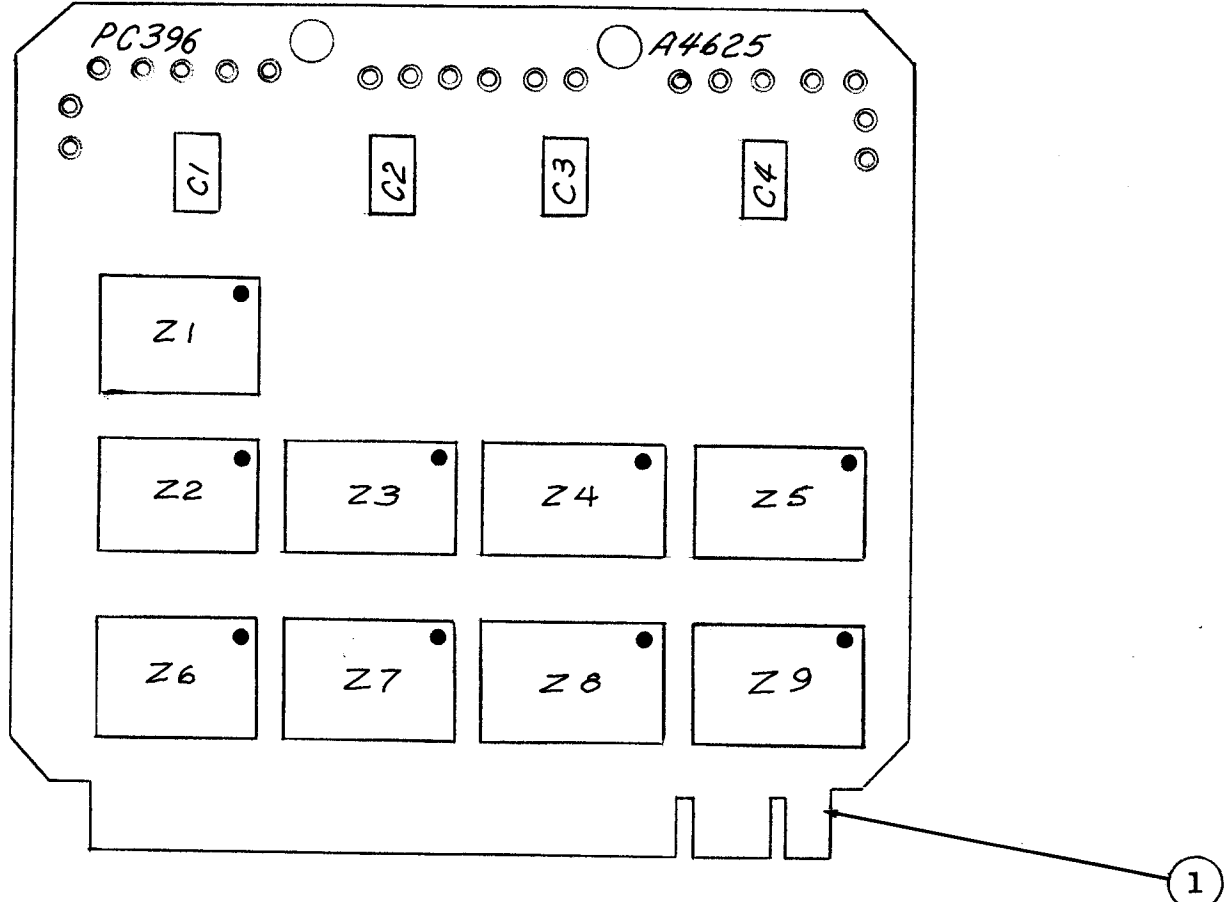

ASSEMBLY NOTES

1. TO MOUNT COMPONENTS INSERT LEAD THROUGH PLATED THRU-HOLES.
2. CAUTION: WHEN APPLYING HEAT AND SOLDER TO LEAD AND FOIL.
3. CLEAN AND INSPECT AS PER TMC SPEC S676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A4625.
5. USE SYMBOL NUMBERS FOR ASSEMBLY REFERENCE.

*8076  
11-16*

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	2	BS100	SOLDER, TIN ALLOY	
1	1	PC396	PRINTED CIRCUIT BOARD	
LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		TITLE PC396 ASSEMBLY DUAL MEMORY CIRCUIT		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED <i>M. Decker</i>	DATE 8/7/69	<i>S. De Marco</i>
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES.	DATE	DATE 8-11-69
TOLERANCES		MECH. DES. <i>R 11220</i>	DATE 8-7-69	A 4625
			SHEET	REV. LTR. A

RTIN-3		ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	
SCALE	CODE	
	A	5461-481
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

NOTES