


THIS SYMBOL DENOTES MOUNTING HOLES FOR A4980. 8 REQ.

**ASSEMBLY NOTES**

1. TO MOUNT COMPONENTS INSERT LEADS THROUGH HOLES.
2. CAUTION, WHEN APPLYING HEAT & SOLDER TO LEAD & FOIL.
3. CLEAN & INSPECT AS PER SPEC S676.
4. FOR ELECTRICAL COMPONENT PART NUMBERS REFER TO NPL A4954
5. USE SYMBOL NUMBERS FOR ASSY. REF.

USING LONG LEADS OF A4980 MOUNT A4980 TO A4954 IN MOUNTING HOLES AS DESIGNATED AND SOLDER (REF. A4980.)

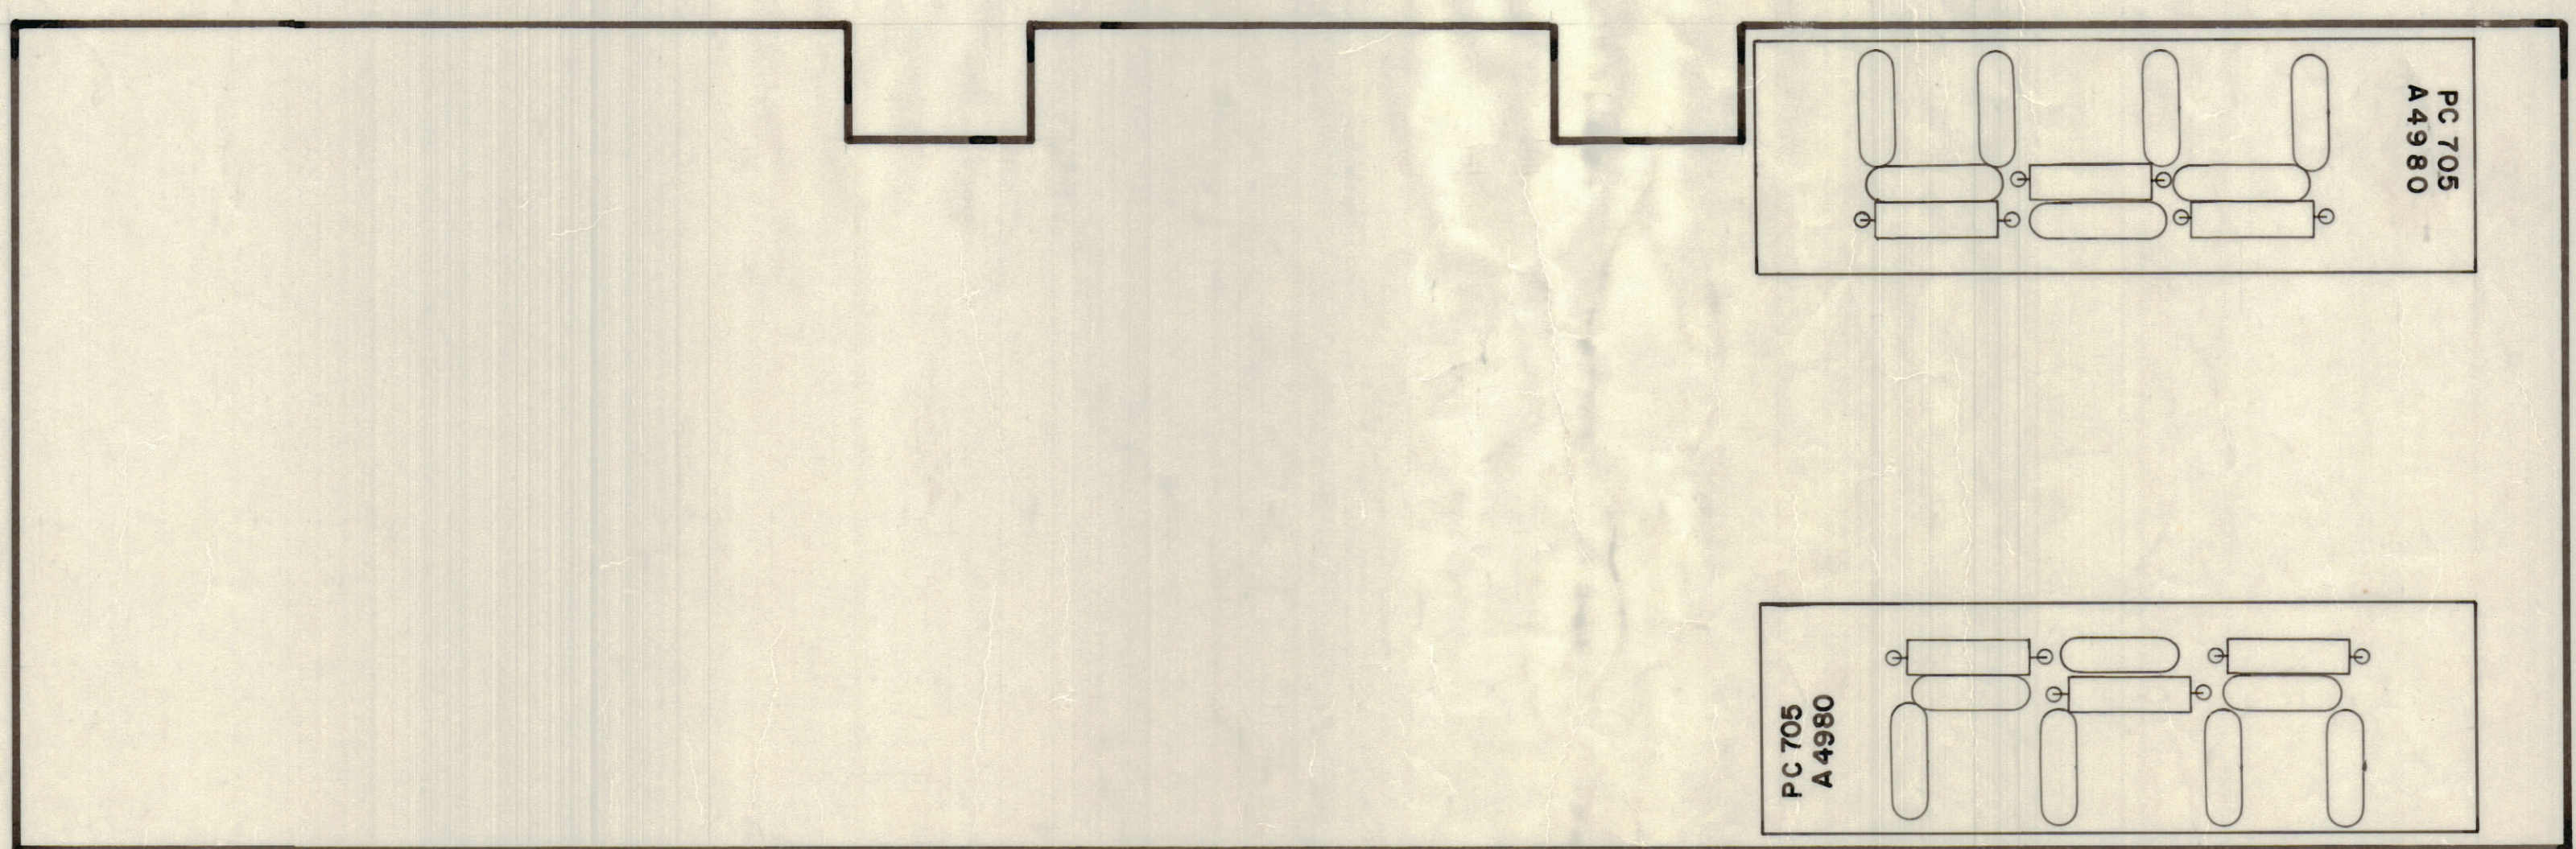

X	2	BS100	SOLDER TIN ALLOY	
/	1	PC 680	PRINTED CIRCUIT BOARD	
QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

LIST OF MATERIAL

**THE TECHNICAL MATERIEL CORP.**  
MAMARONECK, NEW YORK

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	FINAL APPROVAL	DATE
<b>TOLERANCES ON</b> DECIMALS      FRACTIONS .X ± .05        ± 1/64 .XX ± .01        ANGLES .XXX ± .005     = 0° - 30°	MECH. DES.	DATE
	ELECT. DES.	DATE
	CHECKED	DATE
	DRAWN	DATE

ASSY. PRINTED CIRCUIT BD.  
MULTIPLIER BANDPASS

1	BMA 515	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
	APPLICATION	
	CODE	

MATERIAL	FINISH	SIZE	CODE	IDENT NO.	DWG NO.	ISSUE
		D	82679		A4954	

NOTICE TO PERSONS RECEIVING THIS DRAWING  
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.