
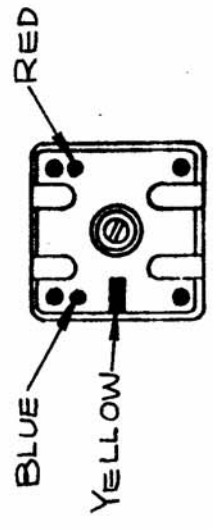



REQ. PER UNIT	USED ON	MODEL	ASSY. NO.	DATE
1		LFSB-1	A 3791	3-16-65

AC205




ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MCS
PRIMARY: $1.91 \mu h \pm .14 h$
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 10 MCS: > 112

MECHANICAL SPEC.

TURNS
PRIMARY: 14
SECONDARY: 4
COLOR CODE: YELLOW
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	4	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE	
		MATERIAL	
	4	COIL, RF, ADJUSTABLE	
		TYPE & TEMPER	
		HEAT TREAT. SPEC.	
		CHECKED	
		DRAWN	
		FINISH & SPEC. NO.	
		ELEC. DES. APP.	
		MECH. DES. APP.	

DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
4-7-65	2			
3-16-65	X	ALA		

DESCRIPTION	SCALE	CODE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		A
FRACTIONS DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	2-A-3940
		AC205