REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	AC-206	Ø
1	LFSB-1	A-3789	3·18·65		

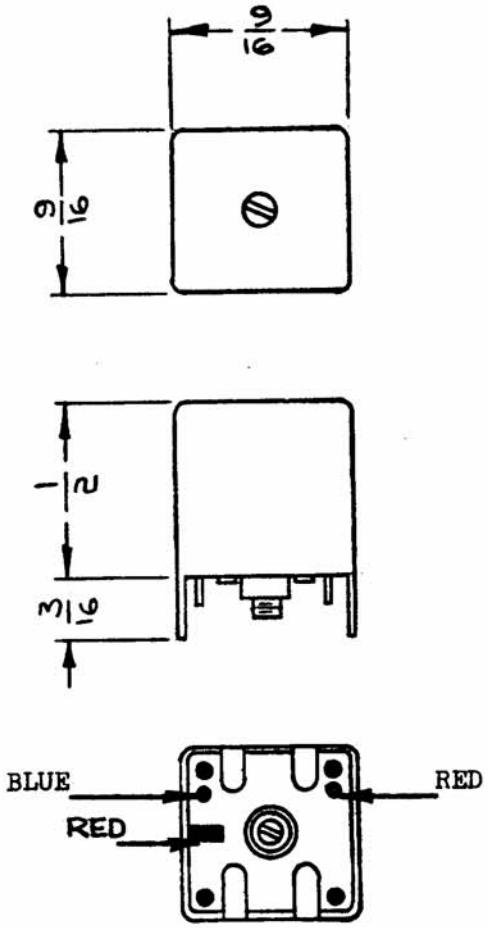

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MCS
PRIMARY: 5.5 µh +.2 µh
SECONDARY: NOT RATED
"Q" (PRIMARY)@6.08 MCS: >130

MECHANICAL SPEC.

TURNS
PRIMARY: 21
SECONDARY: —
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR ~~PRODUCTION~~	4.7.65	Ø	JL		
X	EXPER. RELEASE	3.18.65	X	HLA		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64 ANGLES ± 0° 30′

CODE A

2-A-3952

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		—		

STOCK SIZE: —

MATERIAL: —

TYPE & TEMPER: — HEAT TREAT. SPEC.: —

FINISH & SPEC. NO.: —

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, ADJUSTABLE

DRAWN: H. AUSTIN — CHECKED: 3/25/65 — FINAL APPROVAL

ELEC. DES. APP.: MB — MECH. DES. APP.:

AC-206 Ø

REPROVEL NO. 440H 16106