


AM-107  
A

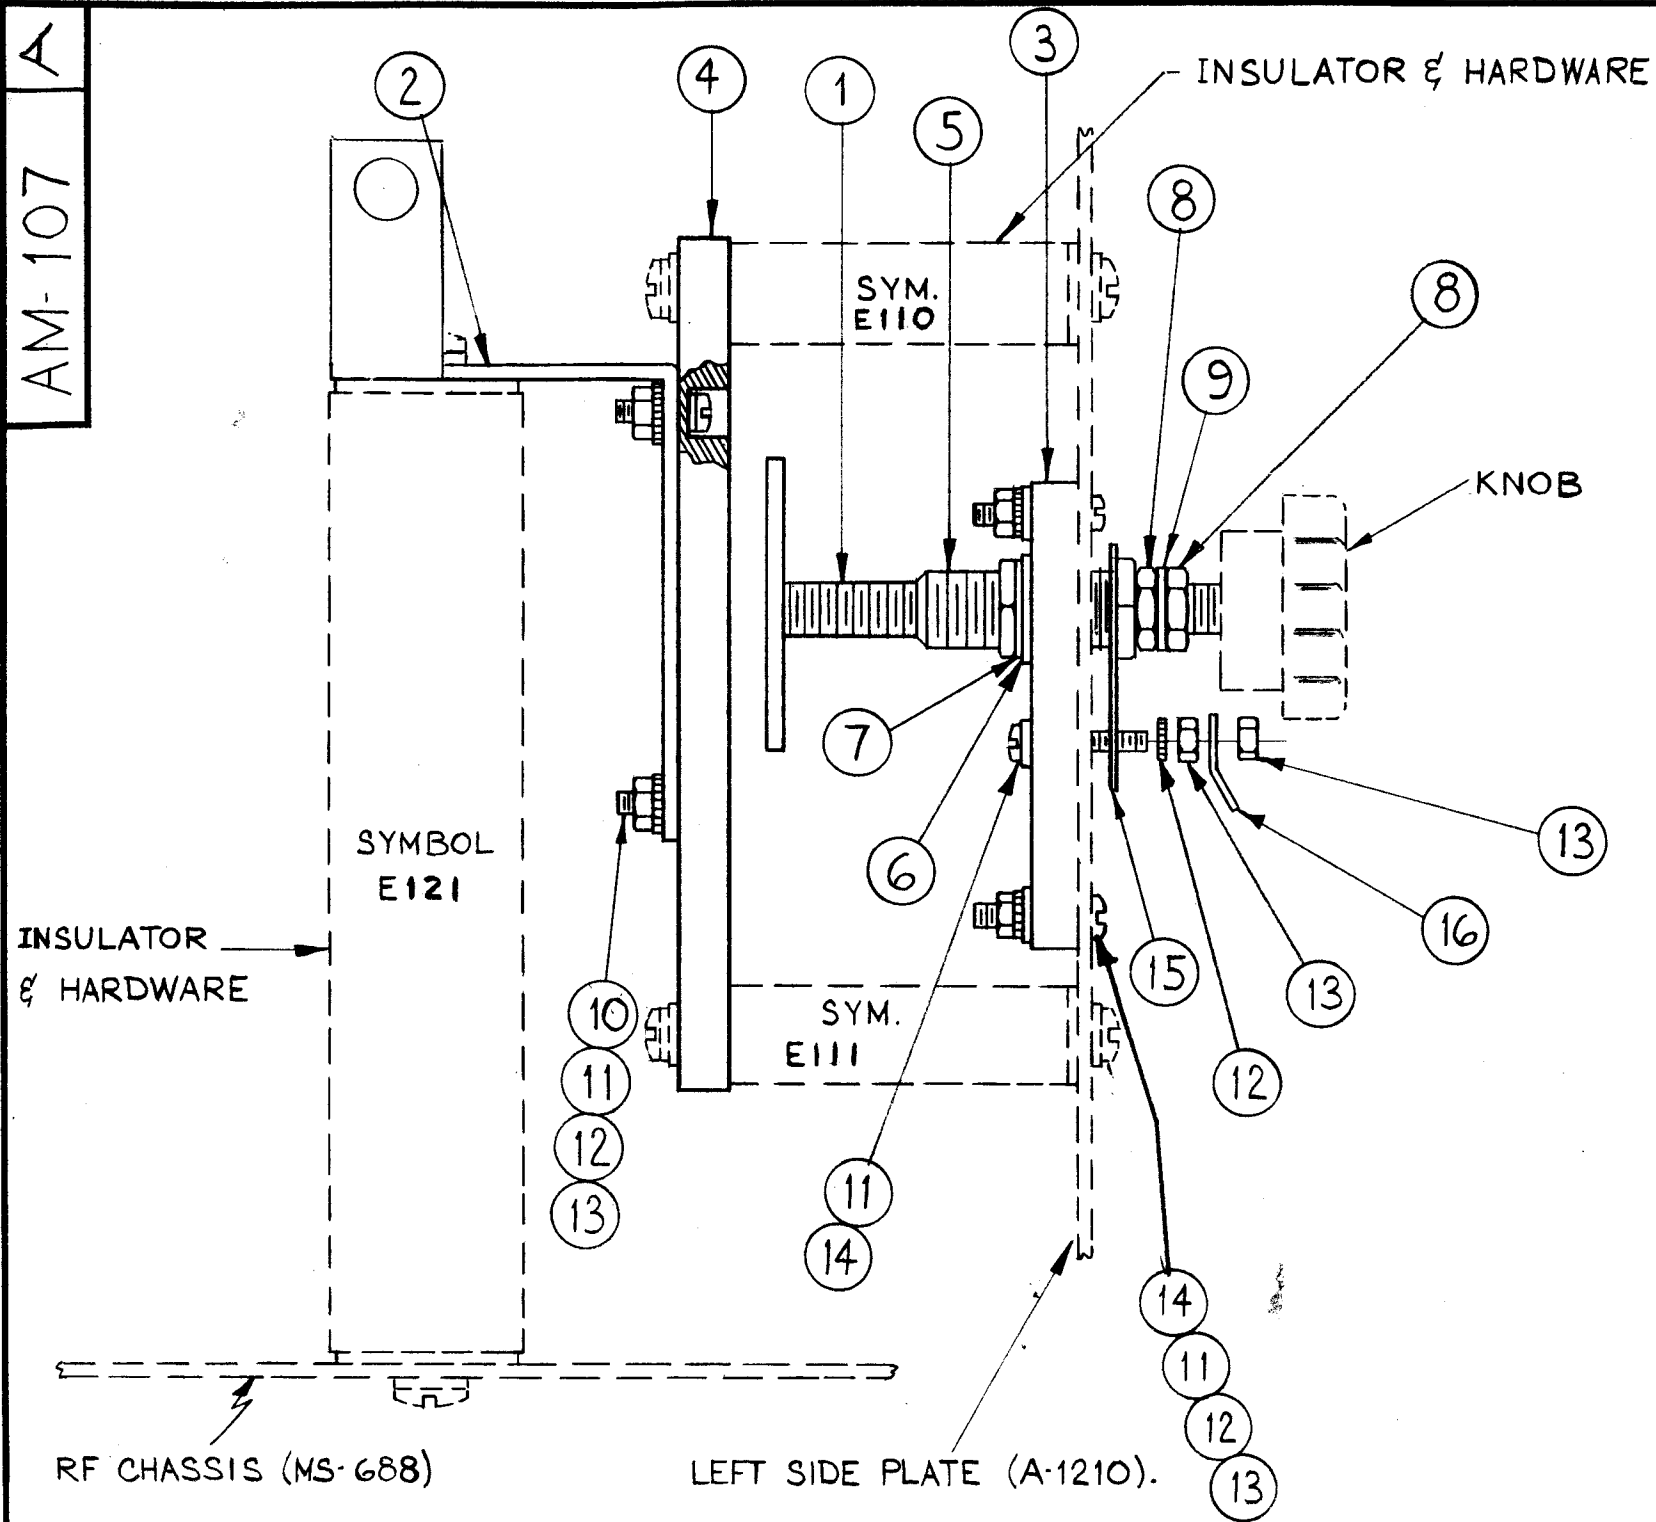

NOTE:

DOTTED LINES INDICATE ITEMS NOT SUPPLIED AS SPARE PARTS WITH CAPACITOR.

ELECTRICAL SPECIFICATIONS:

CAPACITANCE RANGE ~ 0.2 TO 4.2 UUF.  
DIELECTRIC ~ AIR  
FUNCTION ~ P.A. NEUTRALIZING.

1	16	TE-104-1	Lug, Solder
1	15	TE-162	Lug, Terminal
5	14	SCBS0440BN9	Screw, Machine
10	13	NTH0440BN8	Nut, Hex.
9	12	LWEO4MRN	Lockwasher, External
9	11	FWO4HBN	Washer, Flat
4	10	SCBS0440BN5	Screw, Machine
1	9	LWI25MRN	Lockwasher, Internal
2	8	NTH2520BN14	Nut, Hex.
1	7	LWI37MRN	Lockwasher, Internal
1	6	FW37HBN	Washer, Flat
1	5	BB-114	Bushing, Neutralizer
1	4	PX-325	Insulator, Neutralizer
1	3	PX-324	Plate, Mtg. Neutralizer
1	2	MS-780	Plate, Neutralizer
1	1	A-1338	Neutralizer Plate Ass'y.

A	REV. CONFIG. TO CONFORM TO MS 780	5-19-71	20351	RZ		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE: Do Not Scale		4A-MB3		
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
TOLERANCES ON FRACTIONS ± 1/64		DECIMALS ± .005		ANGLES ± 1/2°		

1	RTF				6-23-61
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE	
USED ON					

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
STOCK SIZE			
MATERIAL			
CAPACITOR, VARIABLE, AIR DIELECTRIC (NEUTRALIZING).			
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKER
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
			AM-107
			A