AR-103 C

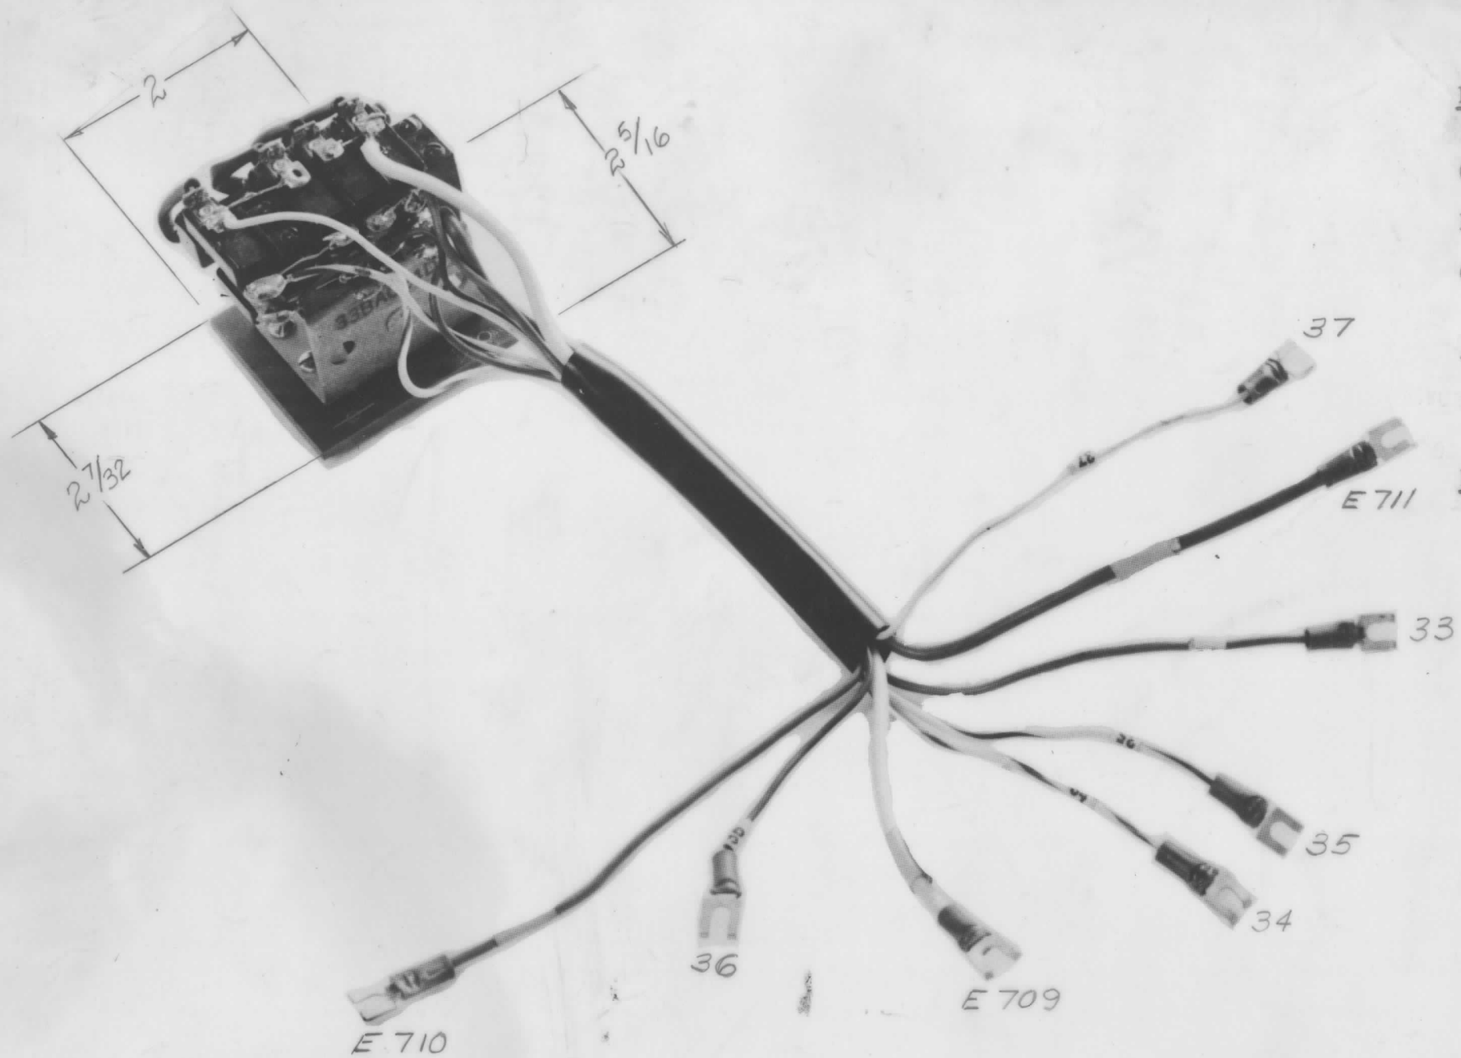

ELECTRICAL SPECIFICATIONS:

COIL	1150 ohm ± 10%
PILE UP	4 Form C (4 P.D.T.)
CONTACTS	1/4 silver cad Rated 25A. 125 VAC resistive
ADJUSTMENT	Operate : 220V, 50/60 CPS.

MOUNTING DATA:

Four 9/64" diameter holes on 7/8" X 3/8" mounting centers.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C		COIL RES WAS 1800 Ω	6.20.66	16427	WW	RB	JC
B	1	CLERICAL CHANGE	9.2.64	4	WB		
A	1	ELEC. SPEC. REVISED	11-23-60	3523	MGF	JCB	

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
1	GPT-10K	AR-161	A-1702	8-24-64

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		CRS	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE		
		CRS	RELAY ASS'Y.	
		MATERIAL		

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
CRS	CRS	AGC		
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	AR 103 C
CRS				

FORM 109-A