REQ. PER UNIT	USED ON			AR-119	D
	MODEL	ASS'Y. NO.	DATE		
1	GPT-40K	AR-116	2-26-60		

PHYSICAL APPEARANCE OF RELAYS WILL VARY DEPENDING ON VENDORS CONFIGURATION - IN ALL CASE'S ASSY WILL BE ELECTRICALY & MECHANICALY INTERCHANGEABLE

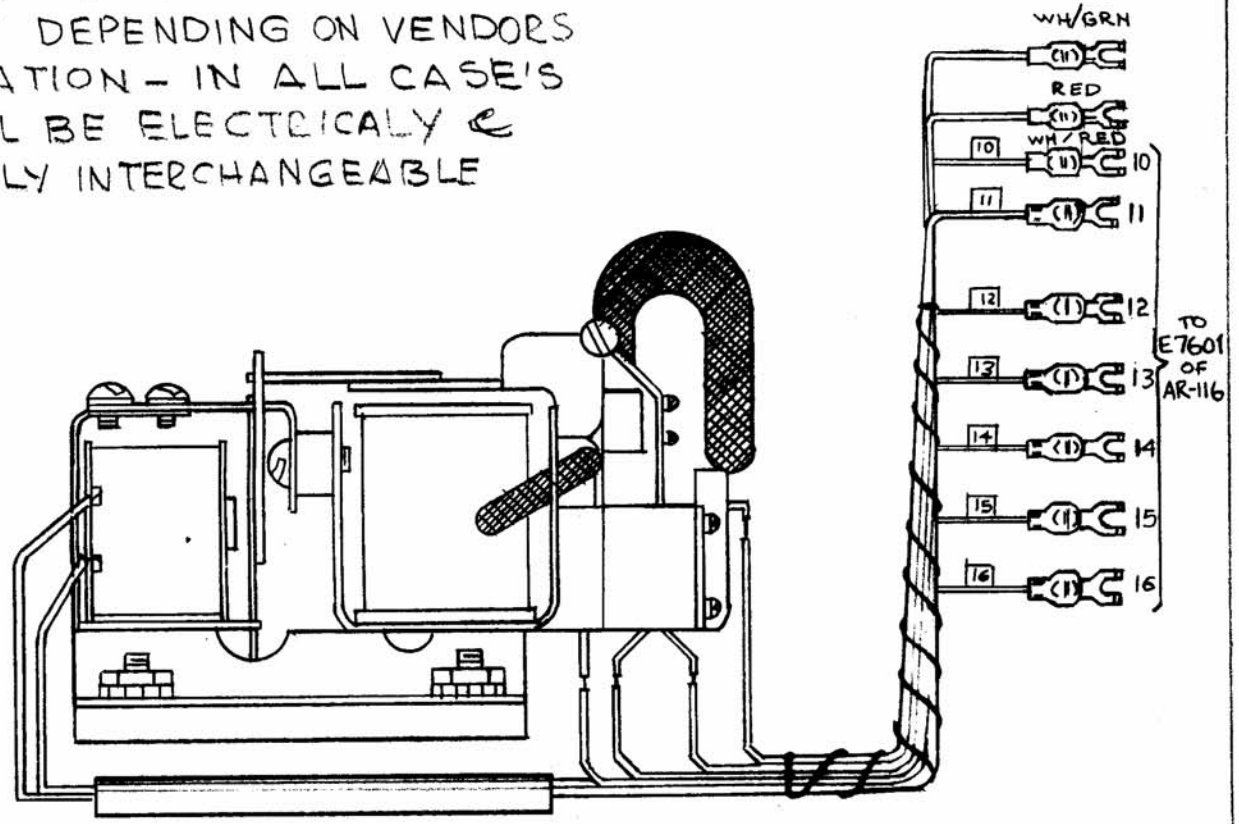

LATCH TYPE

CONTACT ARRANGEMENT
4C (4P.D.T.)

CONTACTS - SILVER

MOISTURE RESISTANT VARNISH ON COILS.

Overall Dimension of Relay
Less Cable 3.8125 lg. × 2.219 W. × 2.4375 H.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
D		NOTE ADD	10-31-85	22117	GDL		
C	5	SEE EMN #10893	2-12-64	10893	A.M.	TR	
B	1	NO. 10 WIRE LEAD ADDED	7 25 60	2634	CY		
A	2	(2) LEADS ADDED	6 14 60	2460	CY	JCB	
	1	RENUMBER LEADS 11-16					

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

GRID OVLD RELAY ASSEMBLY
(RELAY SOLENOID)

TOLERANCES	SCALE: 2A-1830
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STOCK SIZE	MATERIAL			
		DRAWN	CHECKED	FINAL APPROVAL
TYPE & TEMPER	HEAT TREAT. SPEC.			AR-119 D
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

FORM 108-A