


REQ. PER UNIT	M DEL	USED ON ASSY. NO.	DATE
1	GPT-40K	AR-116	4-11-60
		AR-122	

LATCH TYPE  
 CONTACT ARRANGEMENT -  
 4C (4.P.D.T.)  
 CONTACTS SILVER CADMIUM  
 MOISTURE RESISTANT  
 VARNISH ON COILS.

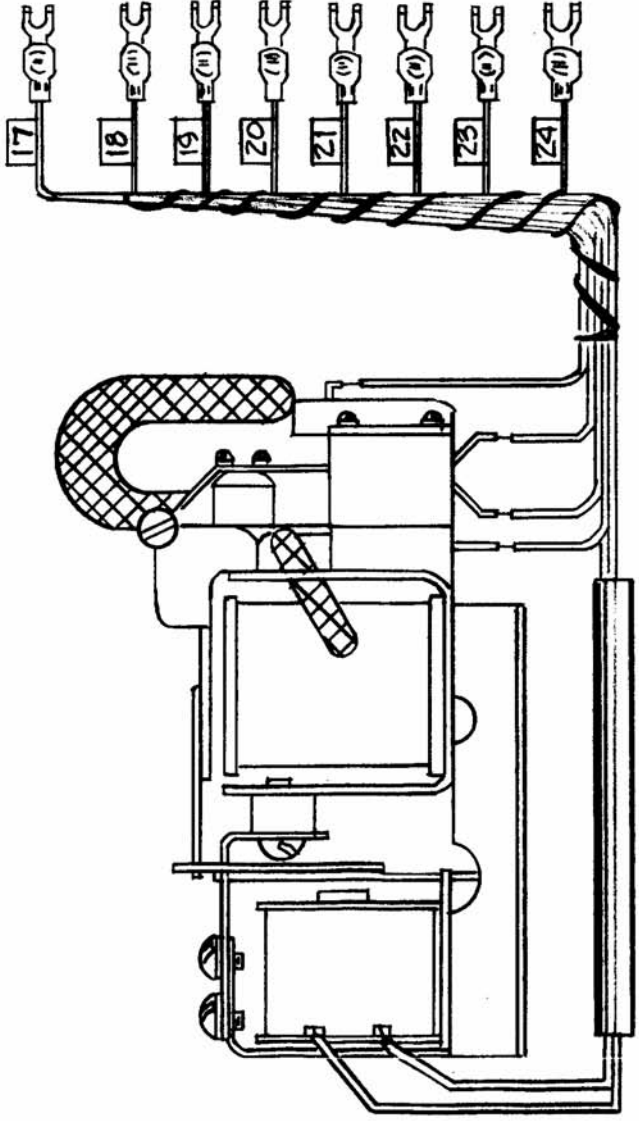

Mounting - 1/4 x 1/2, 4 - 5/32 D. HOLES  
 Overall Dims of Relay less  
 Cable - 3.8125<sub>q</sub> x 2.219<sub>w</sub> x 2.4375.

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
TOLERANCES									THE TECHNICAL MATERIEL CORP.	
DEC. DIM. ±									MAMARONECK, NEW YORK	
FRAC. DIM. ±									RETUNE RELAY ASSEMBLY	
ANGULAR DIM. ±										
SCALE: 2A-1831										
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES										
TYPE & TEMPER										
HEAT TREAT. SPEC.										
MATERIAL										
STOCK SIZE										
FINISH & SPEC. NO.										
DRAWN										
CHECKED										
ELEC. DES. APP										
MECH. DES. APP										
FINAL APPROVAL										
										AR-122