


REQ. PER UNIT	MODEL	USED ON ASSY. NO.	DATE
1	TU-2		10-2-59

AS 114 B


For 1/4 D. SHAFT

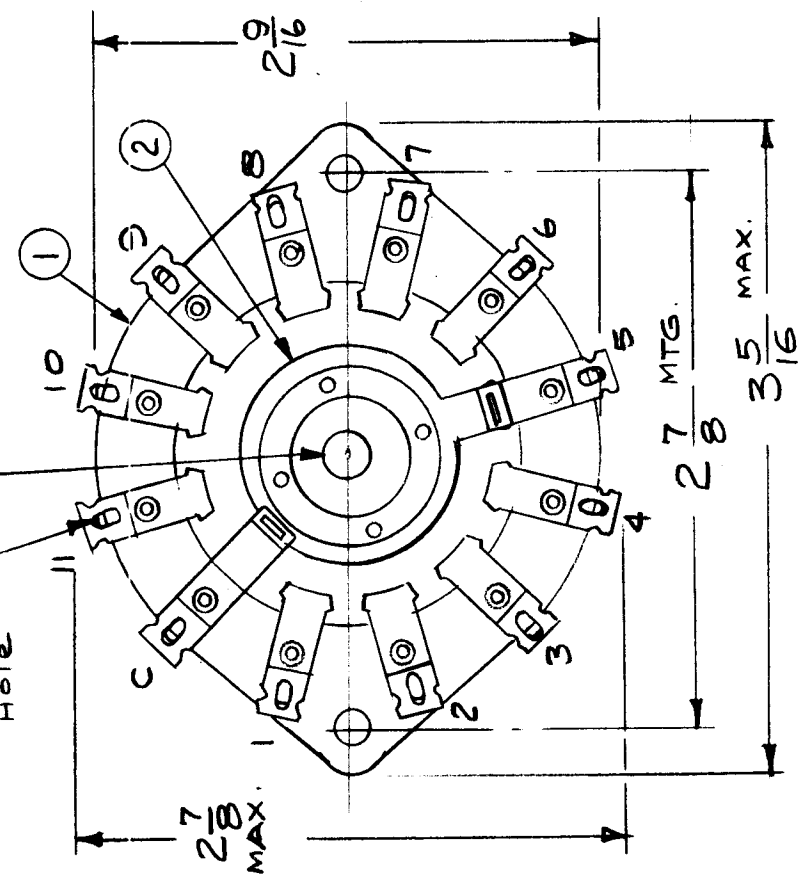

One Section

contacts - Make Before Break
 Rotor - Single Pole
 Wafer - Steatite
 Min. Flashover - 7 KV Peak
 Current, Max. - 20 AMP.

NOTE: BOTH ITEMS SHOWN ARE LOOSE.
 FOR STOCKING PURPOSES,
 FASTEN ITEMS TOGETHER
 WITH WIRE.

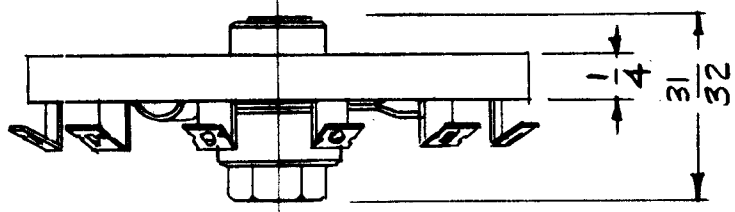

1	2	R0100	ROTOR, ROTARY SW.	SYMBOL
1	1	WS106-1	WAFER, ROTARY SW.	
REQ. ITEM		PART NO.	DESCRIPTION	
		STOCK SIZE	THE TECHNICAL MATERIEL CORP.	
		MATERIAL	MAMARONECK, NEW YORK	
		HEAT TREAT. SPEC.	METER SWITCH,	
		TYPE & TEMPER	ROTA RY	
		FINISH & SPEC. NO.	16'9/2/59	
			DRWN	
			CHECKED	
			FINAL APPROVAL	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		REVISED COMPLETELY	4-10-67	18030	L.A.K.	J.D.	10
A		DIM 2 9/16 WAS 2 3/4	4-28-66	16171	UW	J.P.	9
TOLERANCES		SCALE:	NPL 1A-1771				
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±							
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES							