

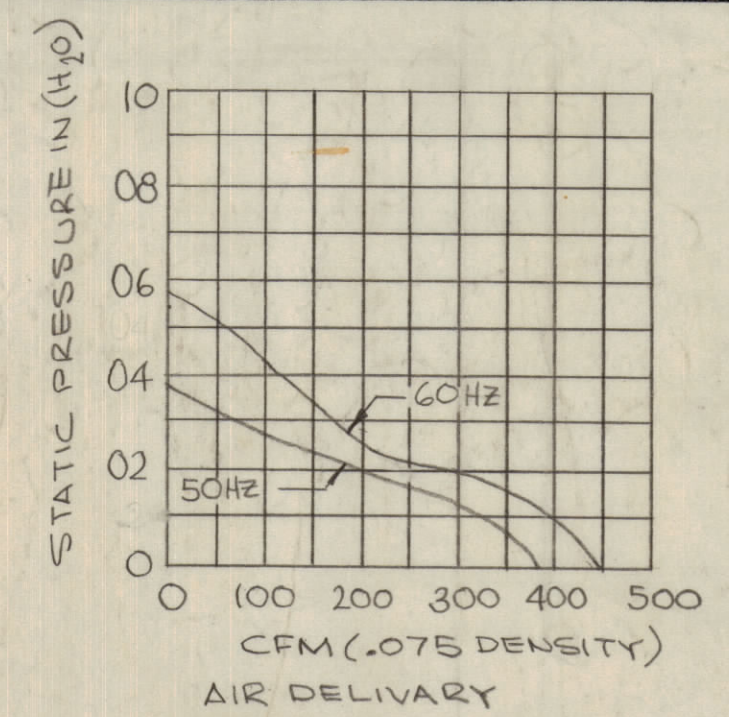



DATA TABLE				
V	Hz	RPM	CURRENT	WATTAGE
115	60	1650	.25AMPS	27
115	50	1400	.21AMPS	21

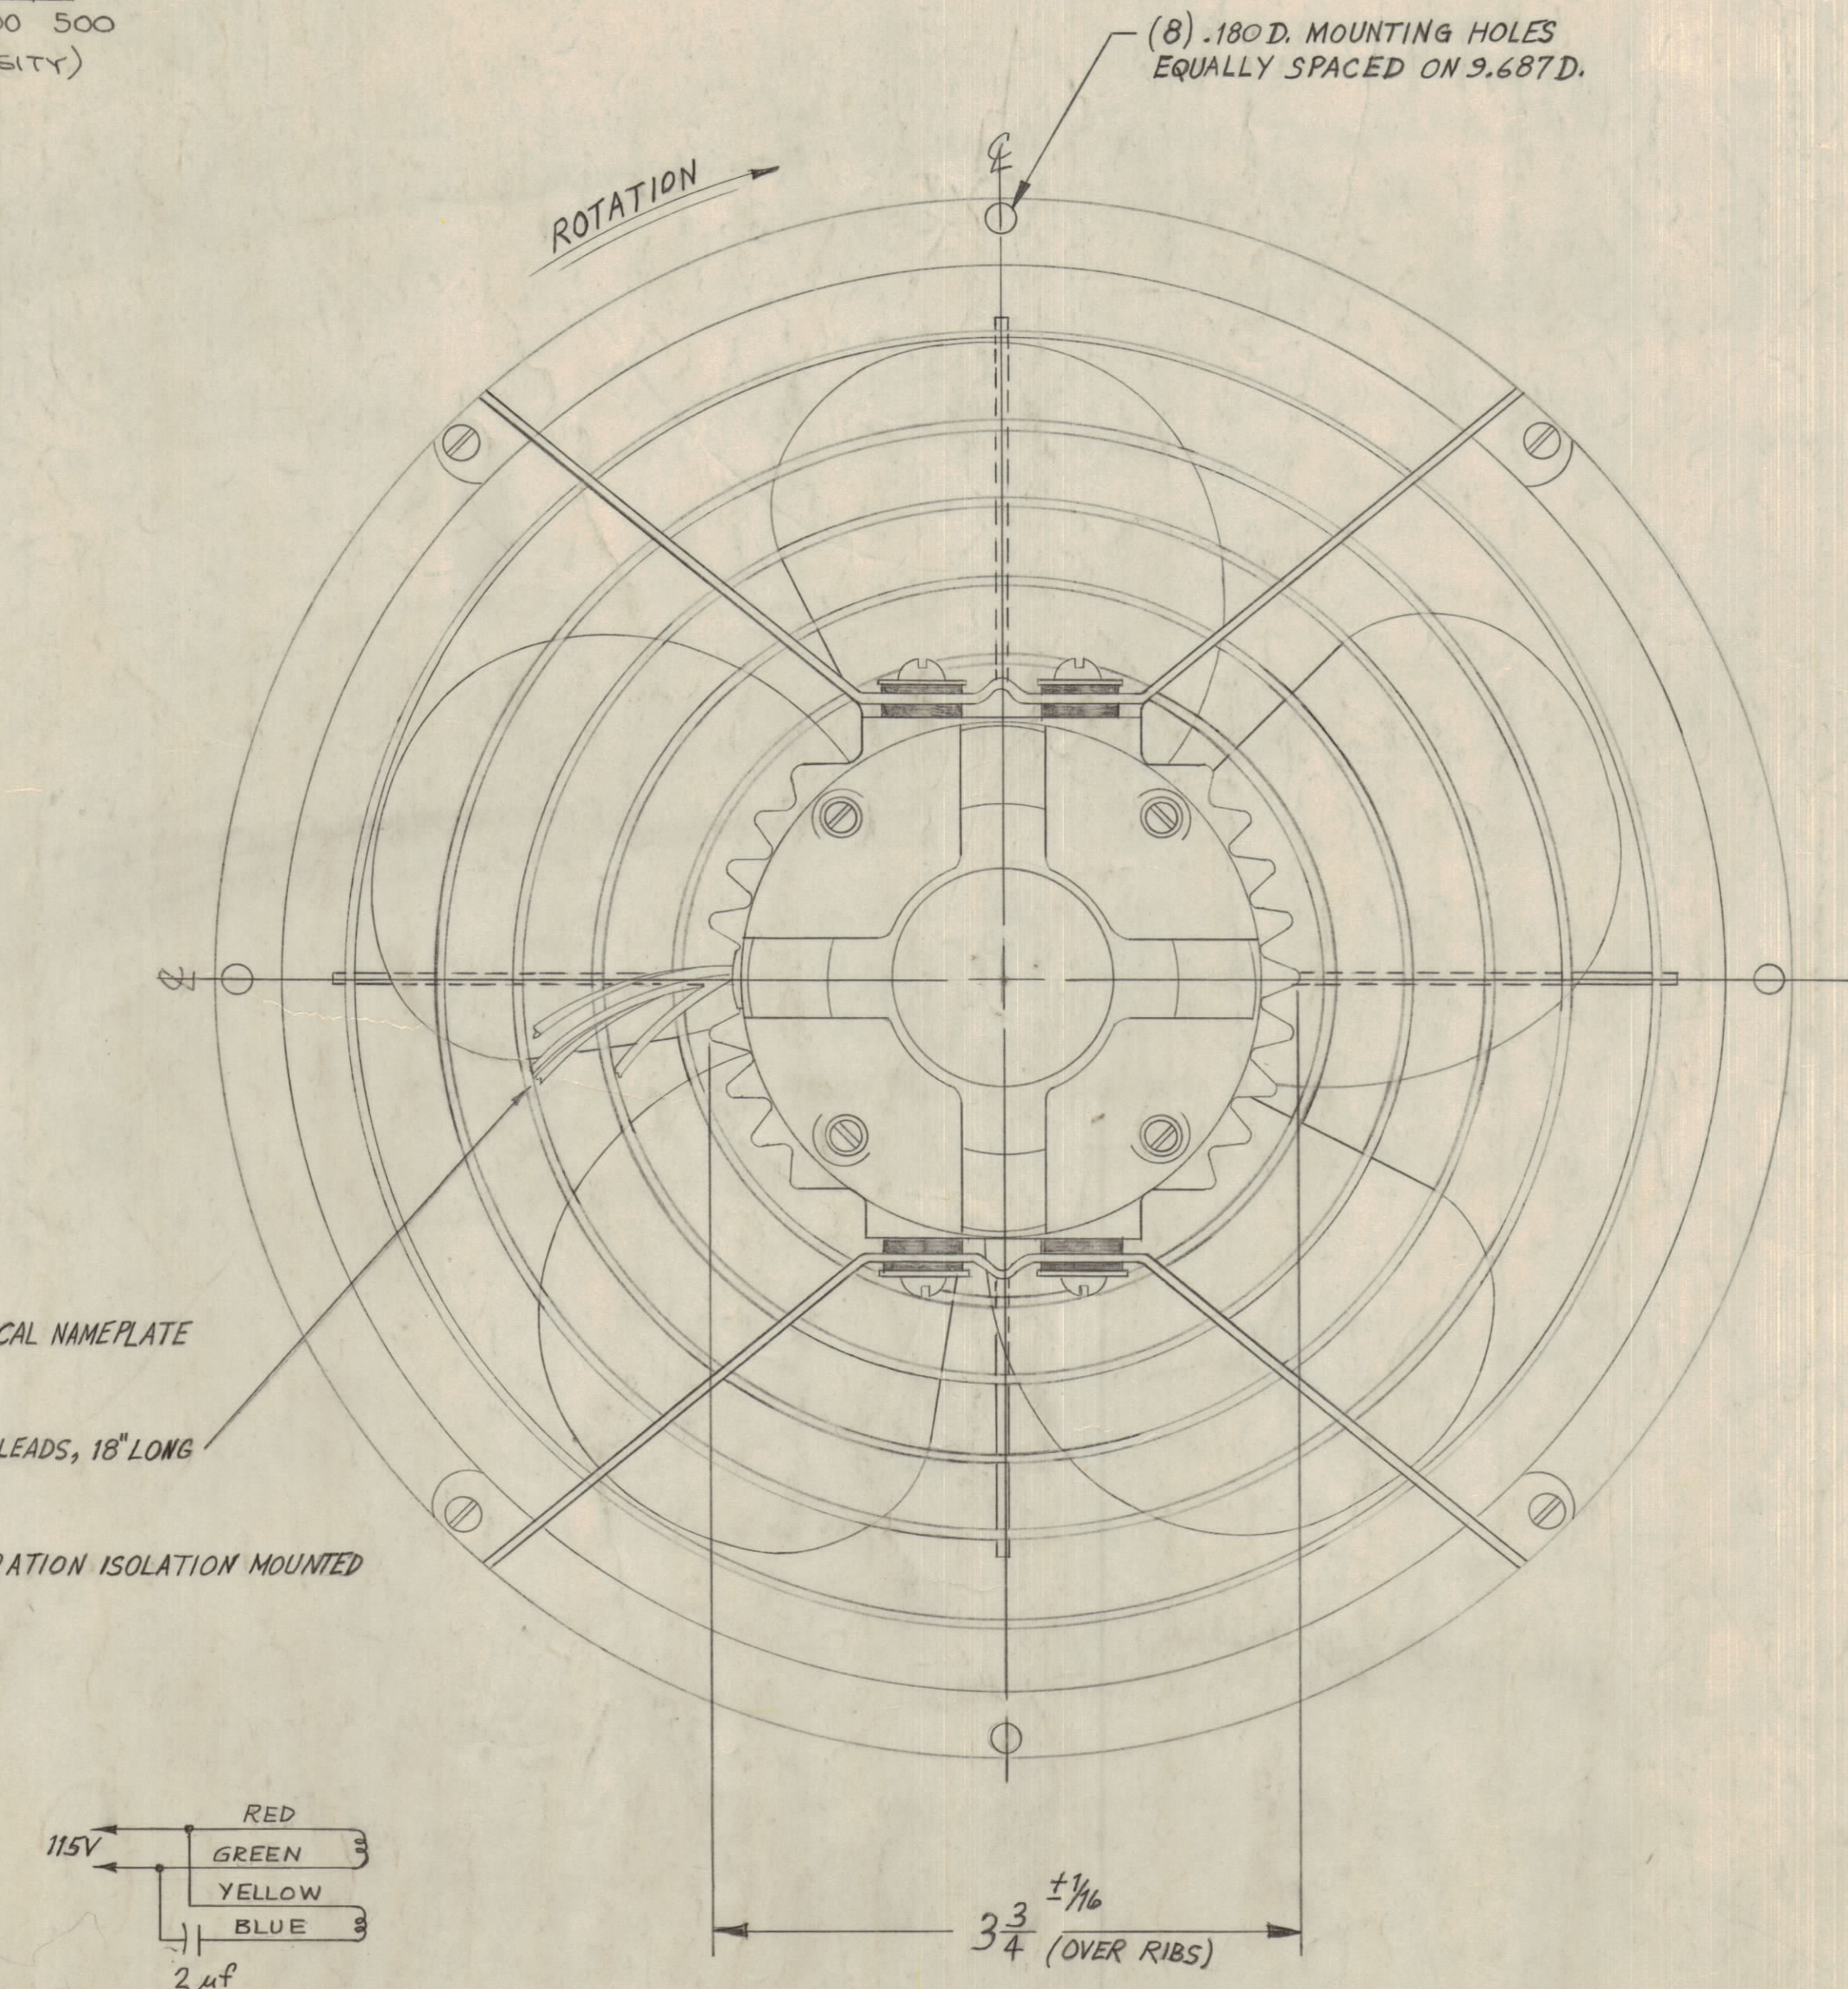

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.
 Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

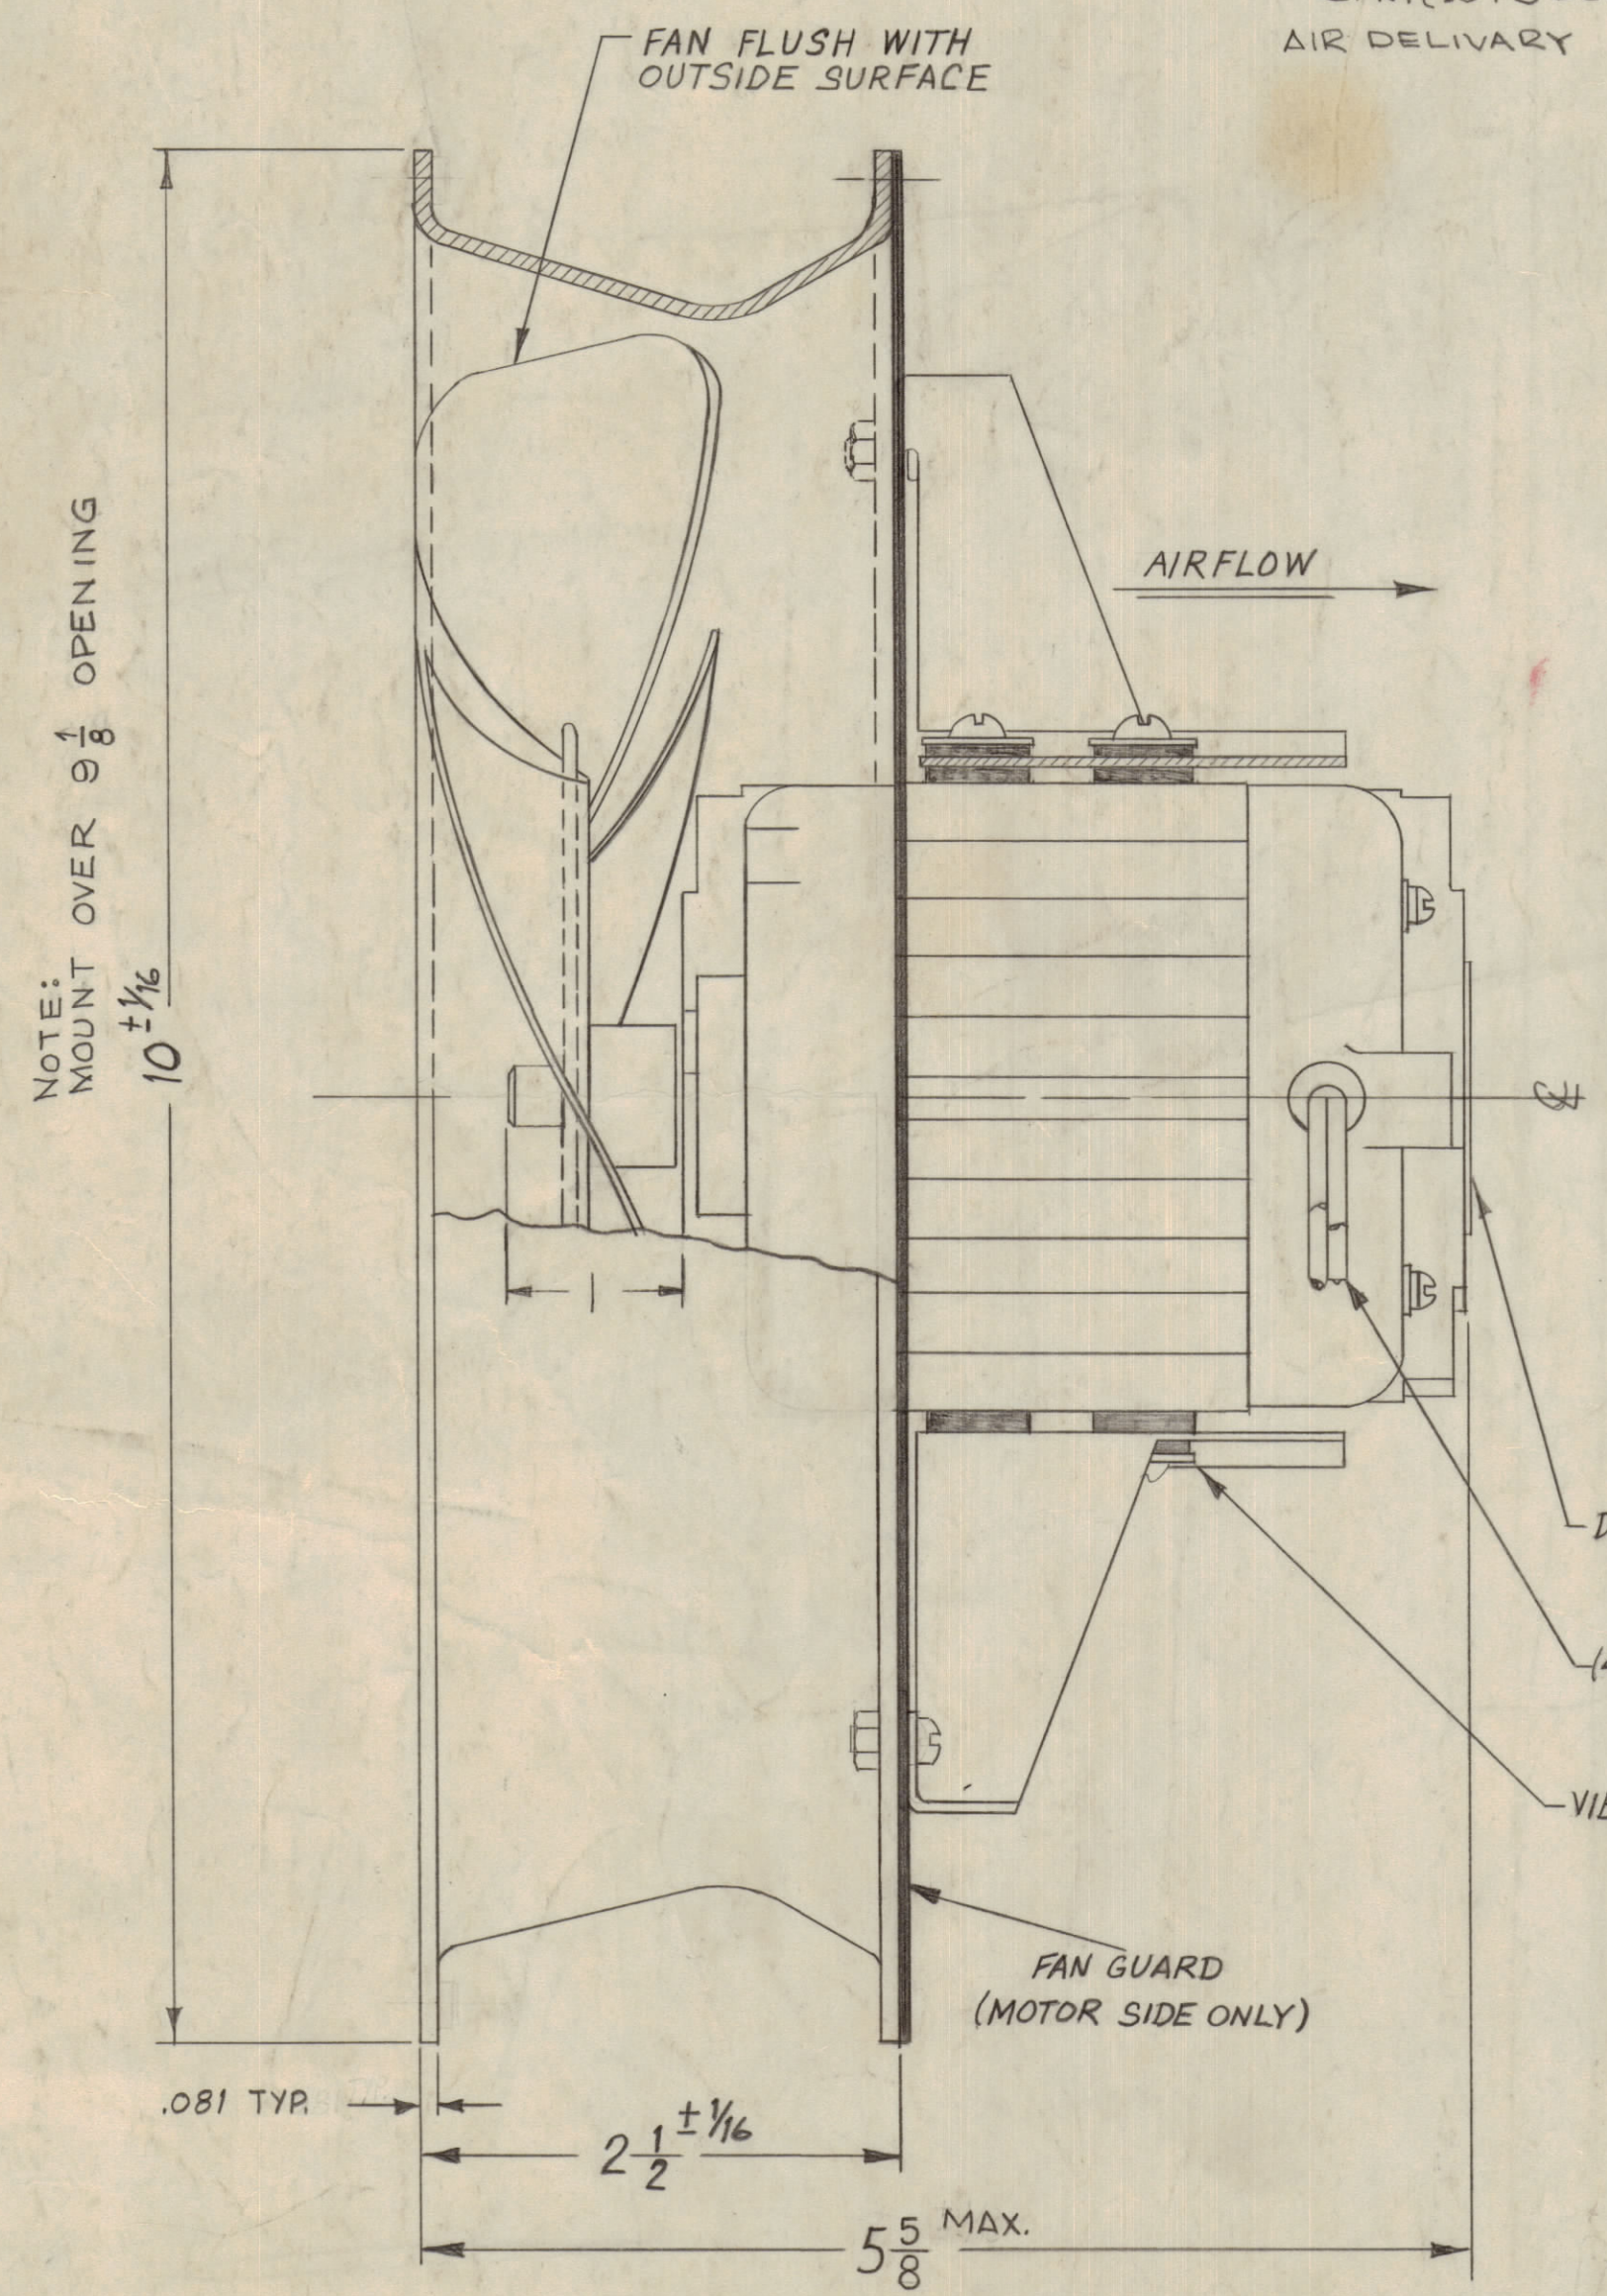

- VOLTS 115
- PHASE SINGLE
- FREQUENCY 50/60 HZ
- RUNNING CAPACITOR 2 UF
- NOM. RPM 1650
- FULL LOAD WATTS 35
- FREE AIR DELIVERY 450 CFM AT 60 HZ
- NET. WEIGHT 4 3/4 LBS.
- DIRECTION OF FLOW AS SHOWN
- VIBRATION ISOLATION MOUNTS ARE TO BE PROVIDED
- AMBIENT TEMP 70°
- BLADES 8"

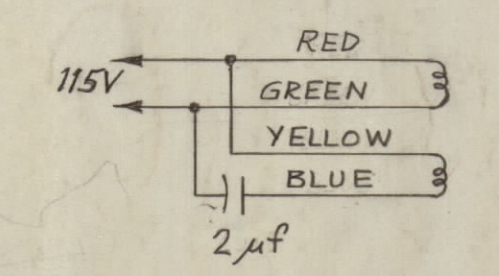

FINISH:
 MOTOR & VENTURI - BLACK ANODIZE
 BRACKET - BLACK ENAMEL

ISSUE NO.	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
G	DATA TABLE & CURVE GRAPH ADDED	11/18/66	17272	4/10	OCB	OCB
F	TEMP. INT. 124 P32-4 DELETED ISOLATORS CLARIFIED	6-9-61	500A	11/19	OCB	OCB
E	FORM 10 Added, Dim 10 Added to Shaft	2-16-61	2352	RL	OCB	OCB
D	Dim 10 Max Wdg 3/16 ± 1/16 SHIELD CLARIFIED (SIDE VIEW)	2-8-61	4106	RL	OCB	OCB
C	ADDED FAN GUARD (MOTOR SIDE ONLY)	12-22-60	3805	OCB	OCB	OCB
B	REDRAWN & REVISED	9-28-60	3808	OCB	OCB	OCB

SCALE: S401-116 (BC2915 F-4)
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FAN INTAKE			
MATERIAL			
TYPE & TEMPER			
DRAWN		ELEC. DES. APP.	
CHECKED		MECH. DES. APP.	
HEAT TREAT SPEC.		FINAL APPROVAL	
SEE NOTE		BL-101	
FINISH & SPEC. NO.			