| REQ. PER UNIT | USED ON | | | BX-211 | 0 |
|---|---|---|---|---|---|
| | MODEL | ASS'Y. NO. | DATE | | |
| 1 | GPT-200K (AT-105) | A-3257 | 10-14-63 | | |

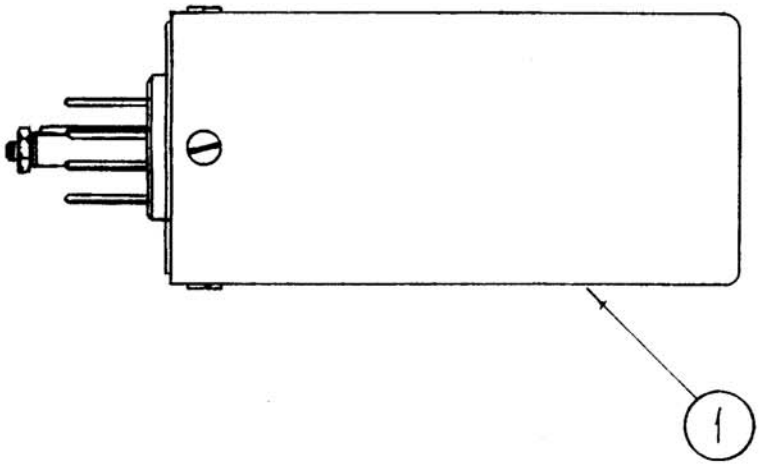


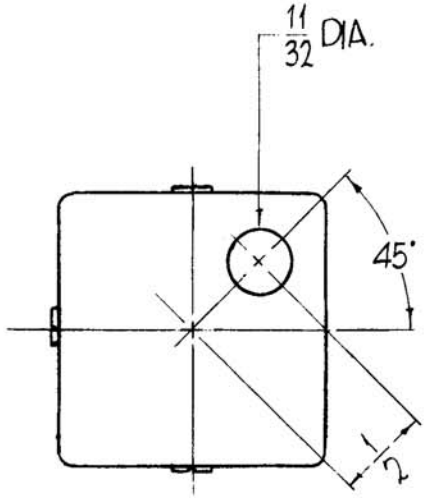


NOTE - REMOVE COVER BEFORE DRILLING

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|
| 0 | ORIGINAL RELEASE FOR PRODUCTION | 5-13-64 | 0 | A.M. | | |

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| 1 | 1 | PO-106-3T | PLUG IN SOCKET, TURRET | |

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

MODIFICATION
PLUG IN SOCKET, TURRET

| STOCK SIZE | MATERIAL | TYPE & TEMPER | HEAT TREAT. SPEC. | FINISH & SPEC. NO. |
|---|---|---|---|---|
| | | | | |

| DRAWN | CHECKED | FINAL APPROVAL |
|---|---|---|
| John C Biele | QA | RJC |
| ELEC. DES. APP. | MECH. DES. APP. | BX-211 0 |
| QA | 12/4/64 | |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1" = 1"

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

TMC FORM 108-A

STOCK NO. 440H