


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.
 Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

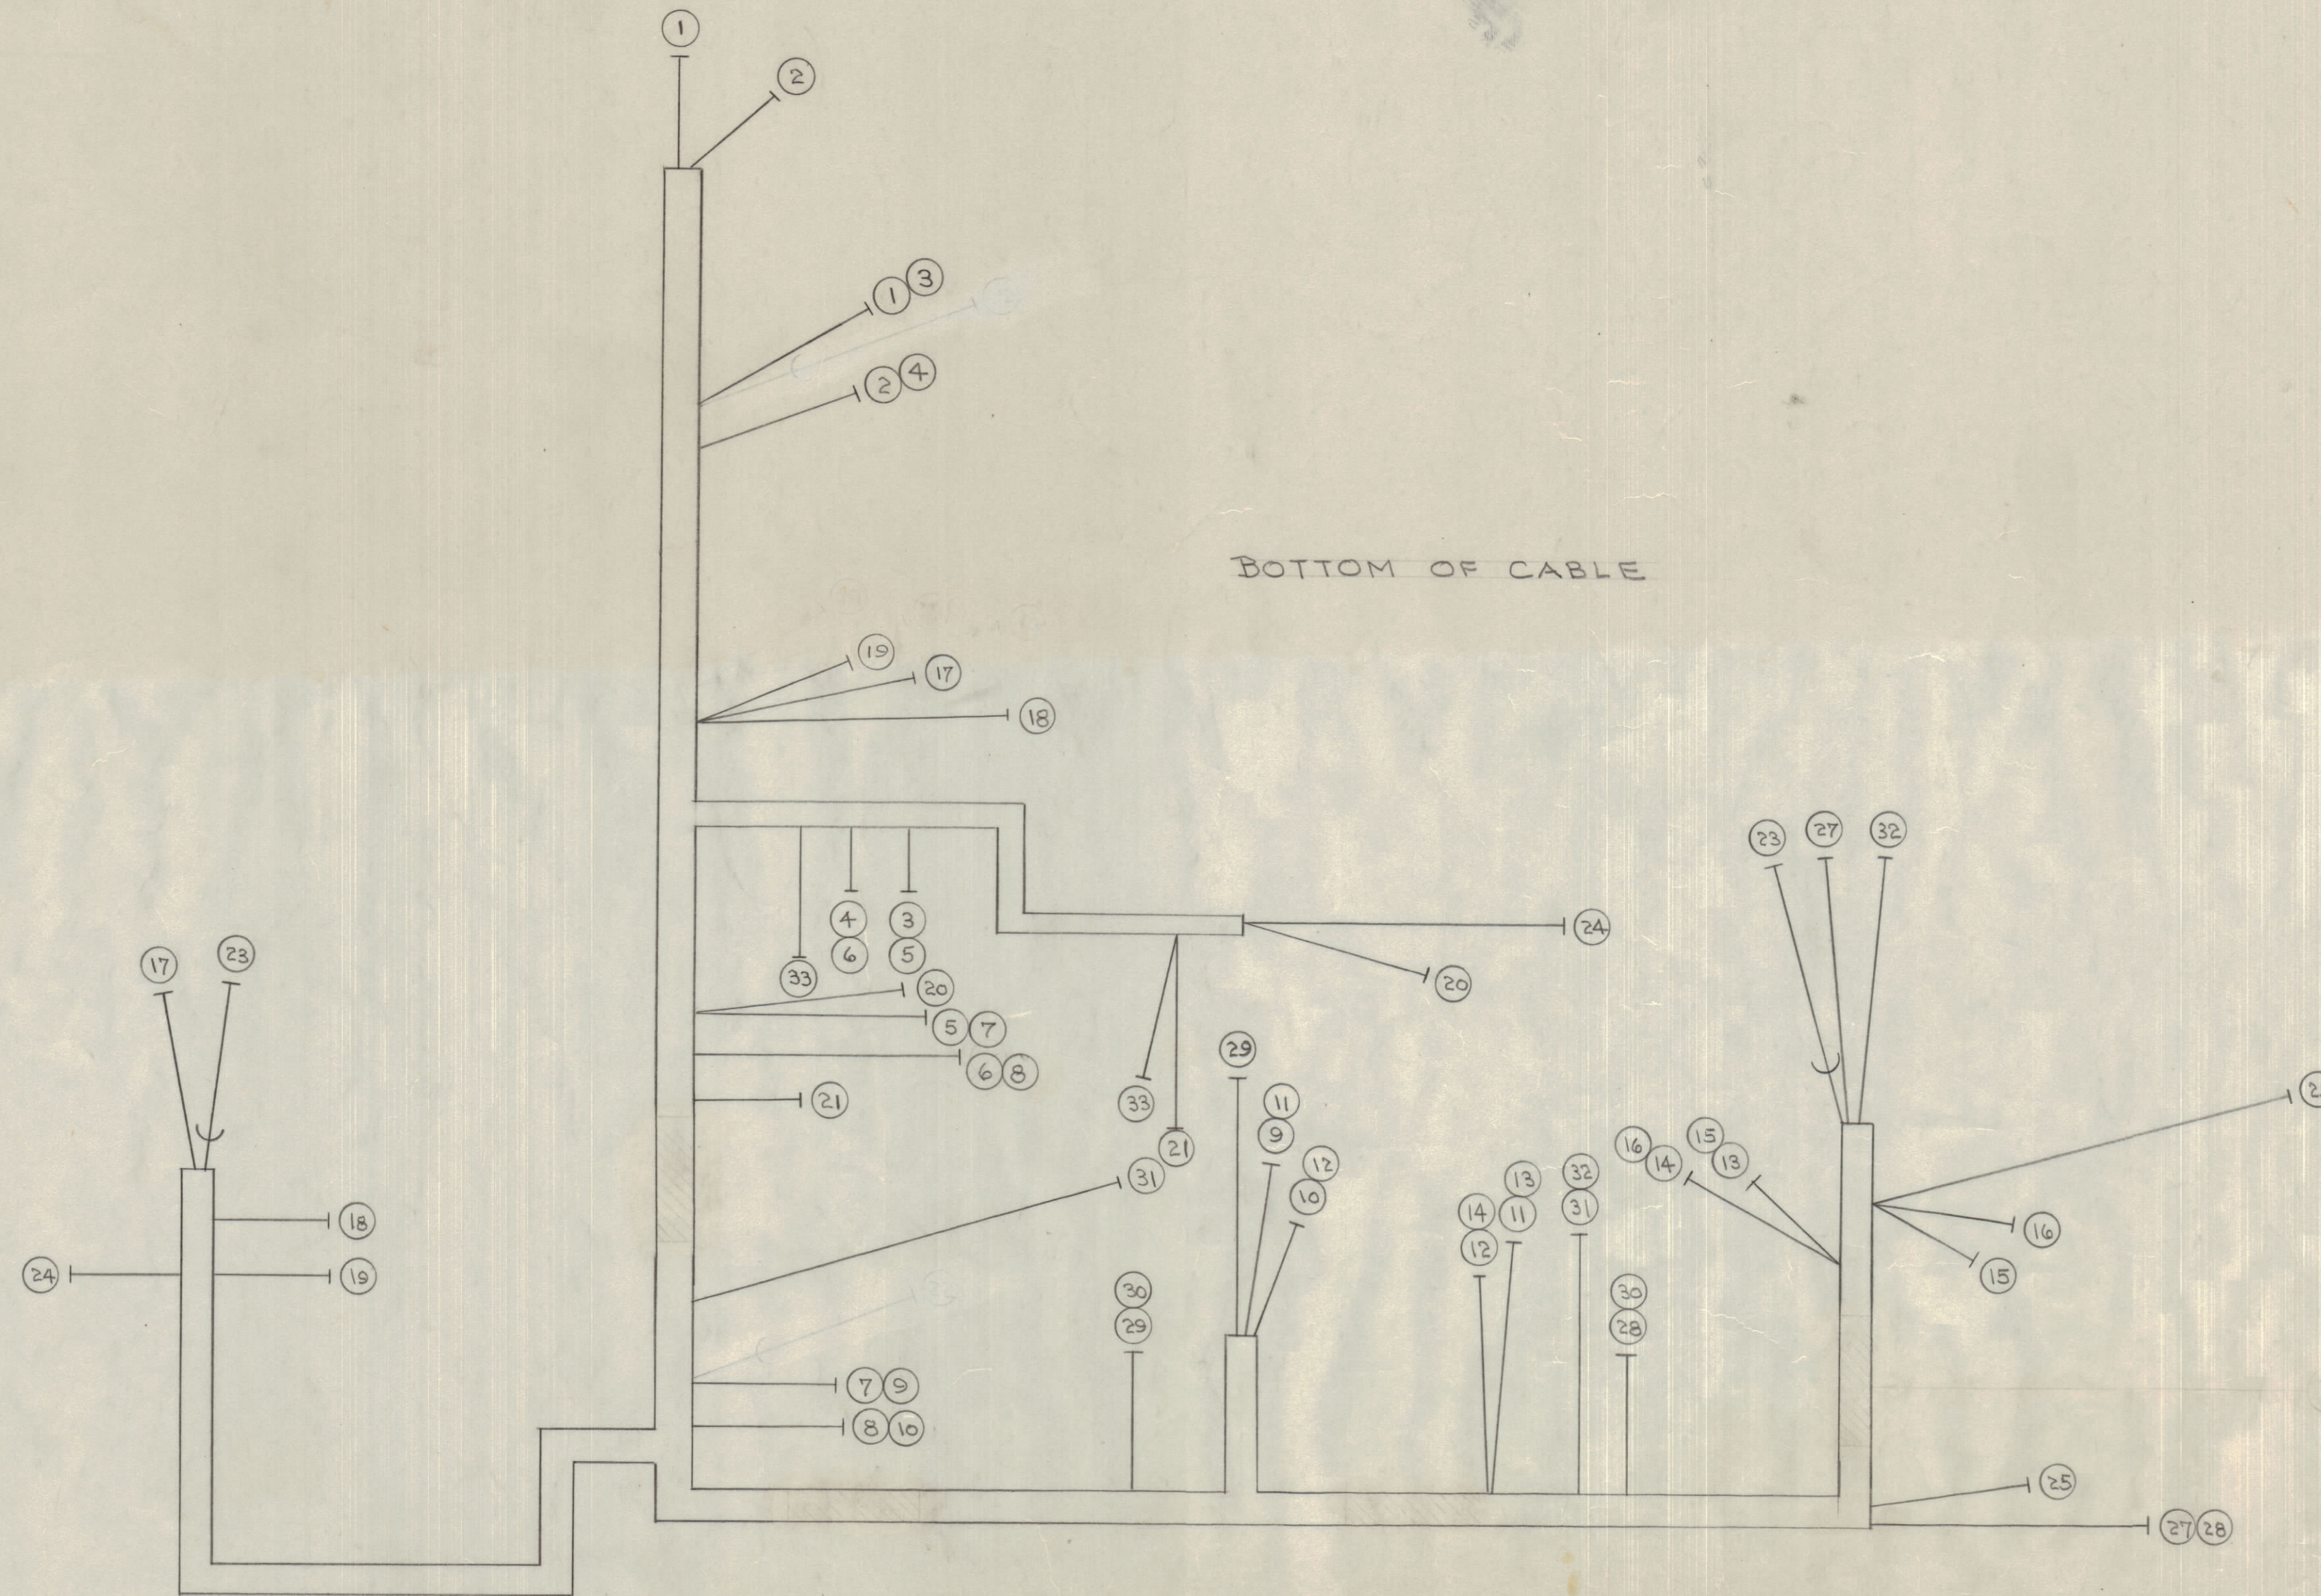

ALL WIRE LENGTHS ALLOW 1/2" EACH END FOR STRIPPING

X	35	BS-100	SOLDER, SOFT
4	34	CD-101-1-MW	CORD LACING, NYLON
6 3/4	33	MWC 22 (7) U5	CABLE, INSULATED (GRN)

CA-133 H

10 3/8	32	MWC 22 (7) U PINK	CABLE, INSULATED (PINK)	
15 3/8	31	MWC 22 (7) U PINK	CABLE, INSULATED (PINK)	
7 1/8	30	MWC 22 (7) U2	CABLE, INSULATED (RED)	
6 1/8	29	MWC 22 (7) U2	CABLE, INSULATED (RED)	
6 3/8	28	MWC 22 (7) U2	CABLE, INSULATED (RED)	
8 3/8	27	MWC 22 (7) U2	CABLE, INSULATED (RED)	
	26		DELETE	
8 3/4	25	MWC 22 (7) U9	CABLE, INSULATED (WHITE)	
20 3/4	24	MWC 22 (7) U7	CABLE, INSULATED (VIOLET)	
25	23	MWC 22 (7) U59	CABLE, INSULATED, SHIELDED	WHITE
	22	DELETED		
16 1/4	21	MWC 22 (7) U2	CABLE, INSULATED (RED)	
16 1/4	20	MWC 22 (7) U6	CABLE, INSULATED (BLUE)	
15 1/4	19	MWC 22 (7) U6	CABLE, INSULATED (BLUE)	
16 1/8	18	MWC 22 (7) U9	CABLE, INSULATED (WHITE)	
17 1/4	17	MWC 22 (7) U5	CABLE, INSULATED (GREEN)	
4 3/8	16	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
3 3/8	15	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	
9	14	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
8 3/8	13	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	
6 3/8	12	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
7 1/2	11	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	
9 3/8	10	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
10'	9	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	
7 1/2	8	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
7"	7	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	
7"	6	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
6 3/4	5	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	
7 1/4	4	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
8 3/4	3	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	
5 1/4	2	MWC 22 (7) U91	CABLE, INSULATED (WH/BRN)	
5 1/2	1	MWC 22 (7) U1	CABLE, INSULATED (BROWN)	

H	2	ITEM (34) WAS CD-100-1-MW	2-25-53	8	296				
G	1	ITEM (23) WAS W-101-4							
F	1	ITEM (34) WAS CD-100-1-MW	7-18-54	5260	GDL				
E	1	ITEM (22) WAS W-101-4							
D	1	ITEM (22) WAS W-101-4							
C	2	CABLE CHANGED	7/15/54	3	CDD				
C	1	REDRAWN	7/15/54	3	CDD				

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE:					
ALL	DEC. DIM. ±	DRILL PUNCH, COMMERCIAL STOCK					
OTHERS	ANGULAR DIM. ±	SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					

MODEL	PROJECT NO.	ASSY. NO.	DATE
FFR-2		A-261	12-27-54
USED ON			

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP.			
MAMARONECK, NEW YORK			
CABLE HARNESS ASSY			
STOCK SIZE		DRAWN	
MATERIAL		ELEC. DES. APP.	
WEIGHT PER PC.		MECH. DES. APP.	
TYPE & TEMPER		HEAT TREAT. SPEC.	
FINISH & SPEC. NO.		SUPERCODES	
		FINAL APPROVAL	
		FFR	
		CA-133 H	