
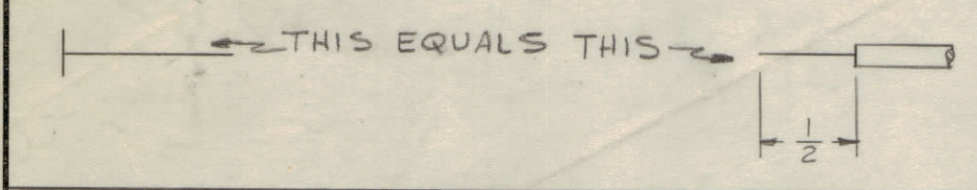
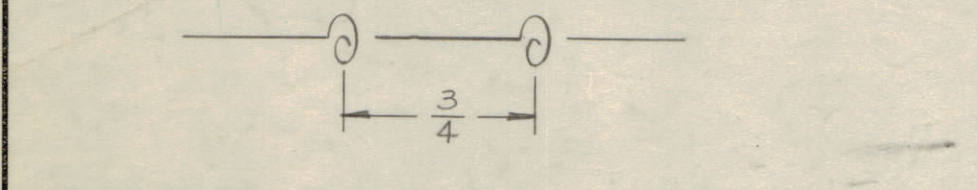


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.  
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT & TINNED 3/8" UNLESS OTHERWISE SPECIFIED.

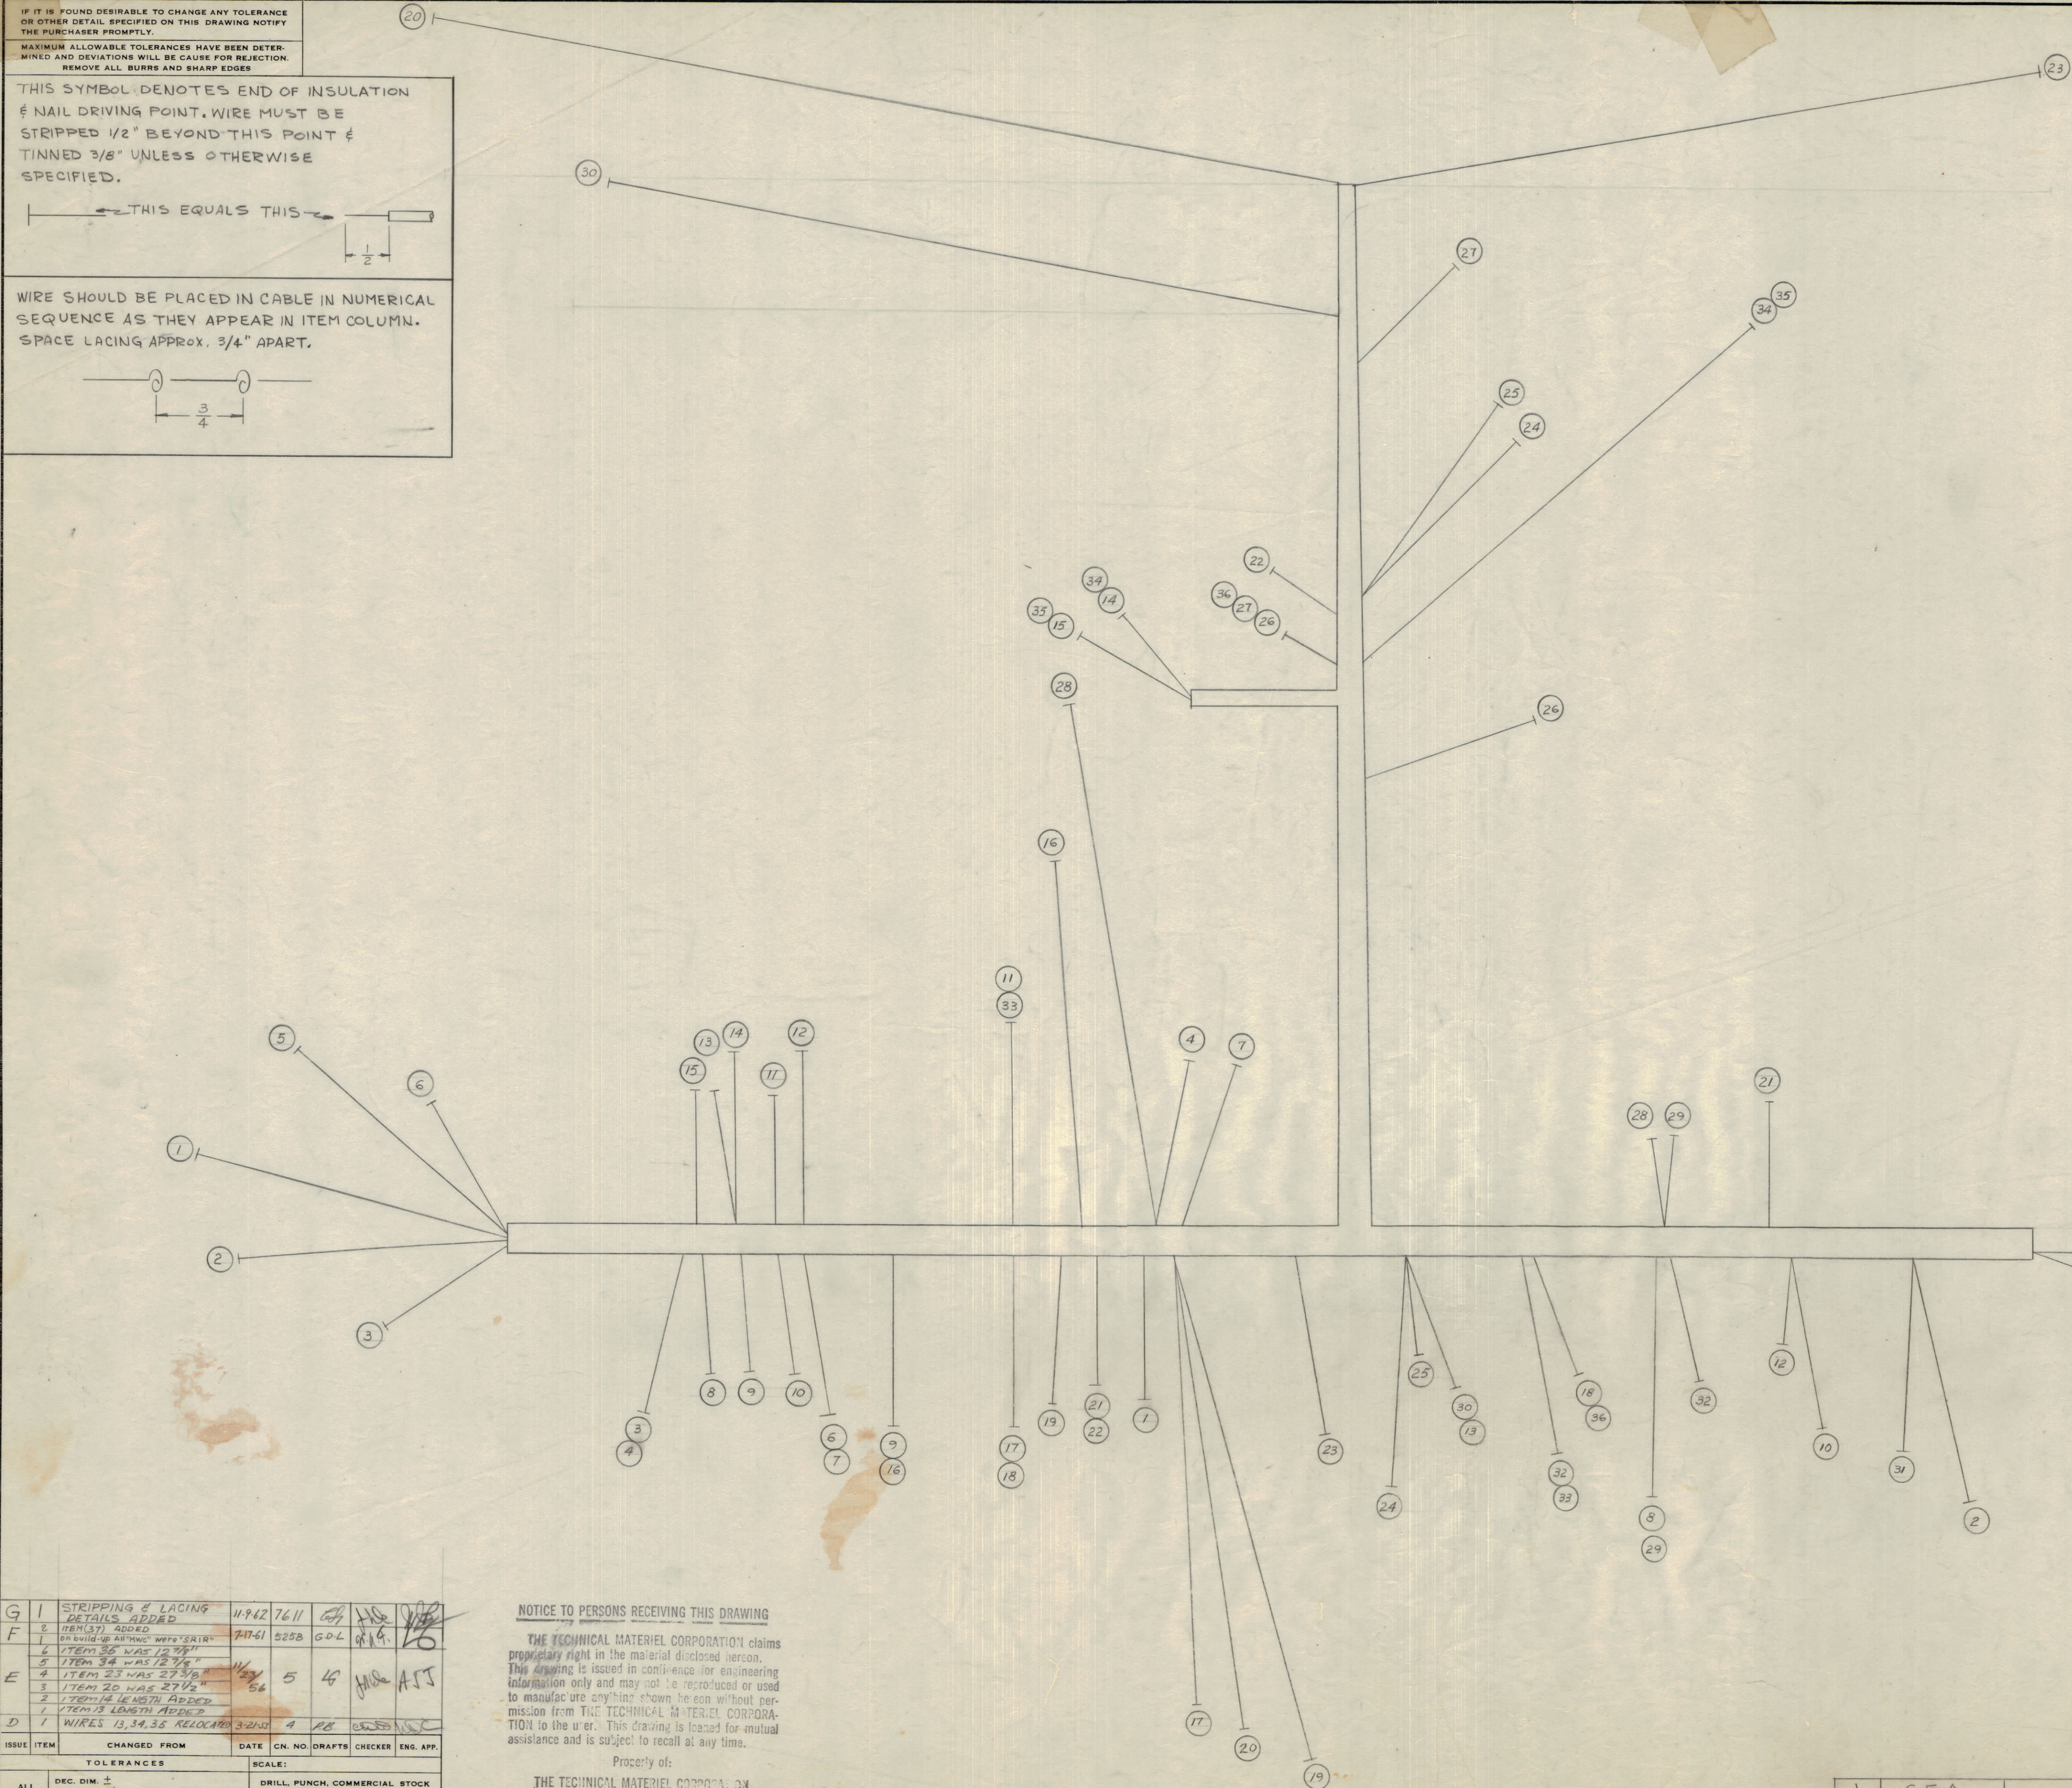

WIRE SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROX. 3/4" APART.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
G	1	STRIPPING & LACING DETAILS ADDED	11-9-62	7611			
F	2	ITEM 37 ADDED	7-17-61	2258	GDL		
E	1	OR BUILD-UP ALL MWC WIRE STRIP					
E	6	ITEM 36 WAS 12 3/4"					
E	5	ITEM 34 WAS 27 3/4"					
E	4	ITEM 23 WAS 27 3/4"					
E	3	ITEM 20 WAS 27 1/2"					
E	2	ITEM 14 LENGTH ADDED					
E	1	ITEM 13 LENGTH ADDED					
D	1	WIRES 13, 34, 35 RELOCATED	3-20-60	4	FB		

**NOTICE TO PERSONS RECEIVING THIS DRAWING**  
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
 THE TECHNICAL MATERIEL CORPORATION  
 MAMARONECK, NEW YORK

REQ. ITEM	PART NO.	DESCRIPTION	COLOR	SYMBOL
X	37	CD-101-1-MW	CORD, LACING, NYLON	BLACK
13	36	MWC 20 (7) U 2	CABLE, INSULATED	RED
11	35	MWC 20 (7) U 10		TAN
10 3/4	34	MWC 20 (7) U 1		BROWN
12	33	MWC 20 (7) U 4		YELLOW
7	32	MWC 20 (7) U 4		YELLOW
7 1/4	31	MWC 20 (7) U 9		WHITE
22 1/2	30	MWC 20 (7) U 9 1		WH. BROWN
5 1/2	29	MWC 20 (7) U 6		BLUE
14 1/2	28	MWC 20 (7) U PINK		PINK
7 1/4	27	MWC 20 (7) U 2		RED
6 7/4	26	MWC 20 (7) U 2		RED
12 3/4	25	MWC 20 (7) U 4		YELLOW
14 1/4	24	MWC 22 (7) U 5		GREEN
24 3/8	23	MWC 22 (7) U 6		BLUE
13 7/8	22	MWC 22 (7) U 1		BROWN
11 3/4	21	MWC 22 (7) U 1		BROWN
31 1/4	20	MWC 22 (7) U PINK		PINK
10 1/2	19	MWC 22 (7) U 0		BLACK
10 1/2	18	MWC 22 (7) U 2		RED
10 1/4	17	MWC 22 (7) U 2		RED
9 1/2	16	MWC 22 (7) U 0		BLACK
19 1/2	15	MWC 20 (7) U TAN		TAN
19 3/4	14	MWC 22 (7) U 11		BROWN
12 1/2	13	MWC 22 (7) U 9 1		WH. BROWN
15 3/4	12	MWC 22 (7) U 4		YELLOW
7 3/4	11	MWC 22 (7) U 4		YELLOW
16 1/4	10	MWC 22 (7) U 6		BLUE
6 1/4	9	MWC 22 (7) U 0		BLACK
16 1/4	8	MWC 20 (7) U 6		BLUE
9 1/2	7	MWC 20 (7) U 8		GRAY
8	6	MWC 20 (7) U 8		GRAY
23 1/2	5	MWC 20 (7) U 8		GRAY
10 1/2	4	MWC 20 (7) U 9		WHITE
6 3/4	3	MWC 20 (7) U 9		WHITE
23 1/2	2	MWC 20 (7) U 9		WHITE
14	1	MWC 20 (7) U 1	CABLE, INSULATED	BROWN

STOCK SIZE	DESCRIPTION	COLOR	SYMBOL
	POWER CABLE		
	CFA		

TYPE & TEMPER	DATE	ELEC. DES. APP.	MECH. DES. APP.
	11-3-55		

HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL

REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
1	CFA			3-21-55

FINISH & SPEC. NO.	SYMBOL
	CA-158 G

CA-158 G