
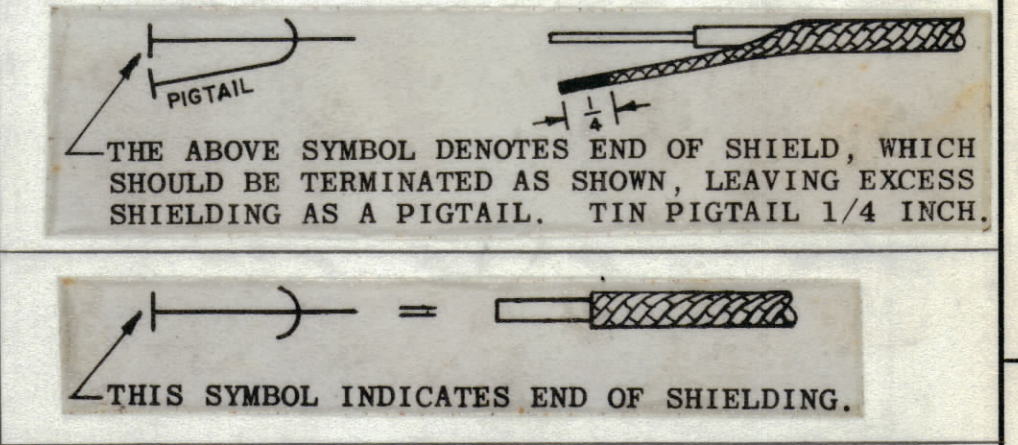



REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
D4	X1	ADDED IT. 62	7/23/65		J.G.	J.G.
		THIS DWG NOT TO BE USED FOR FUTURE PROD.	10/12/65			

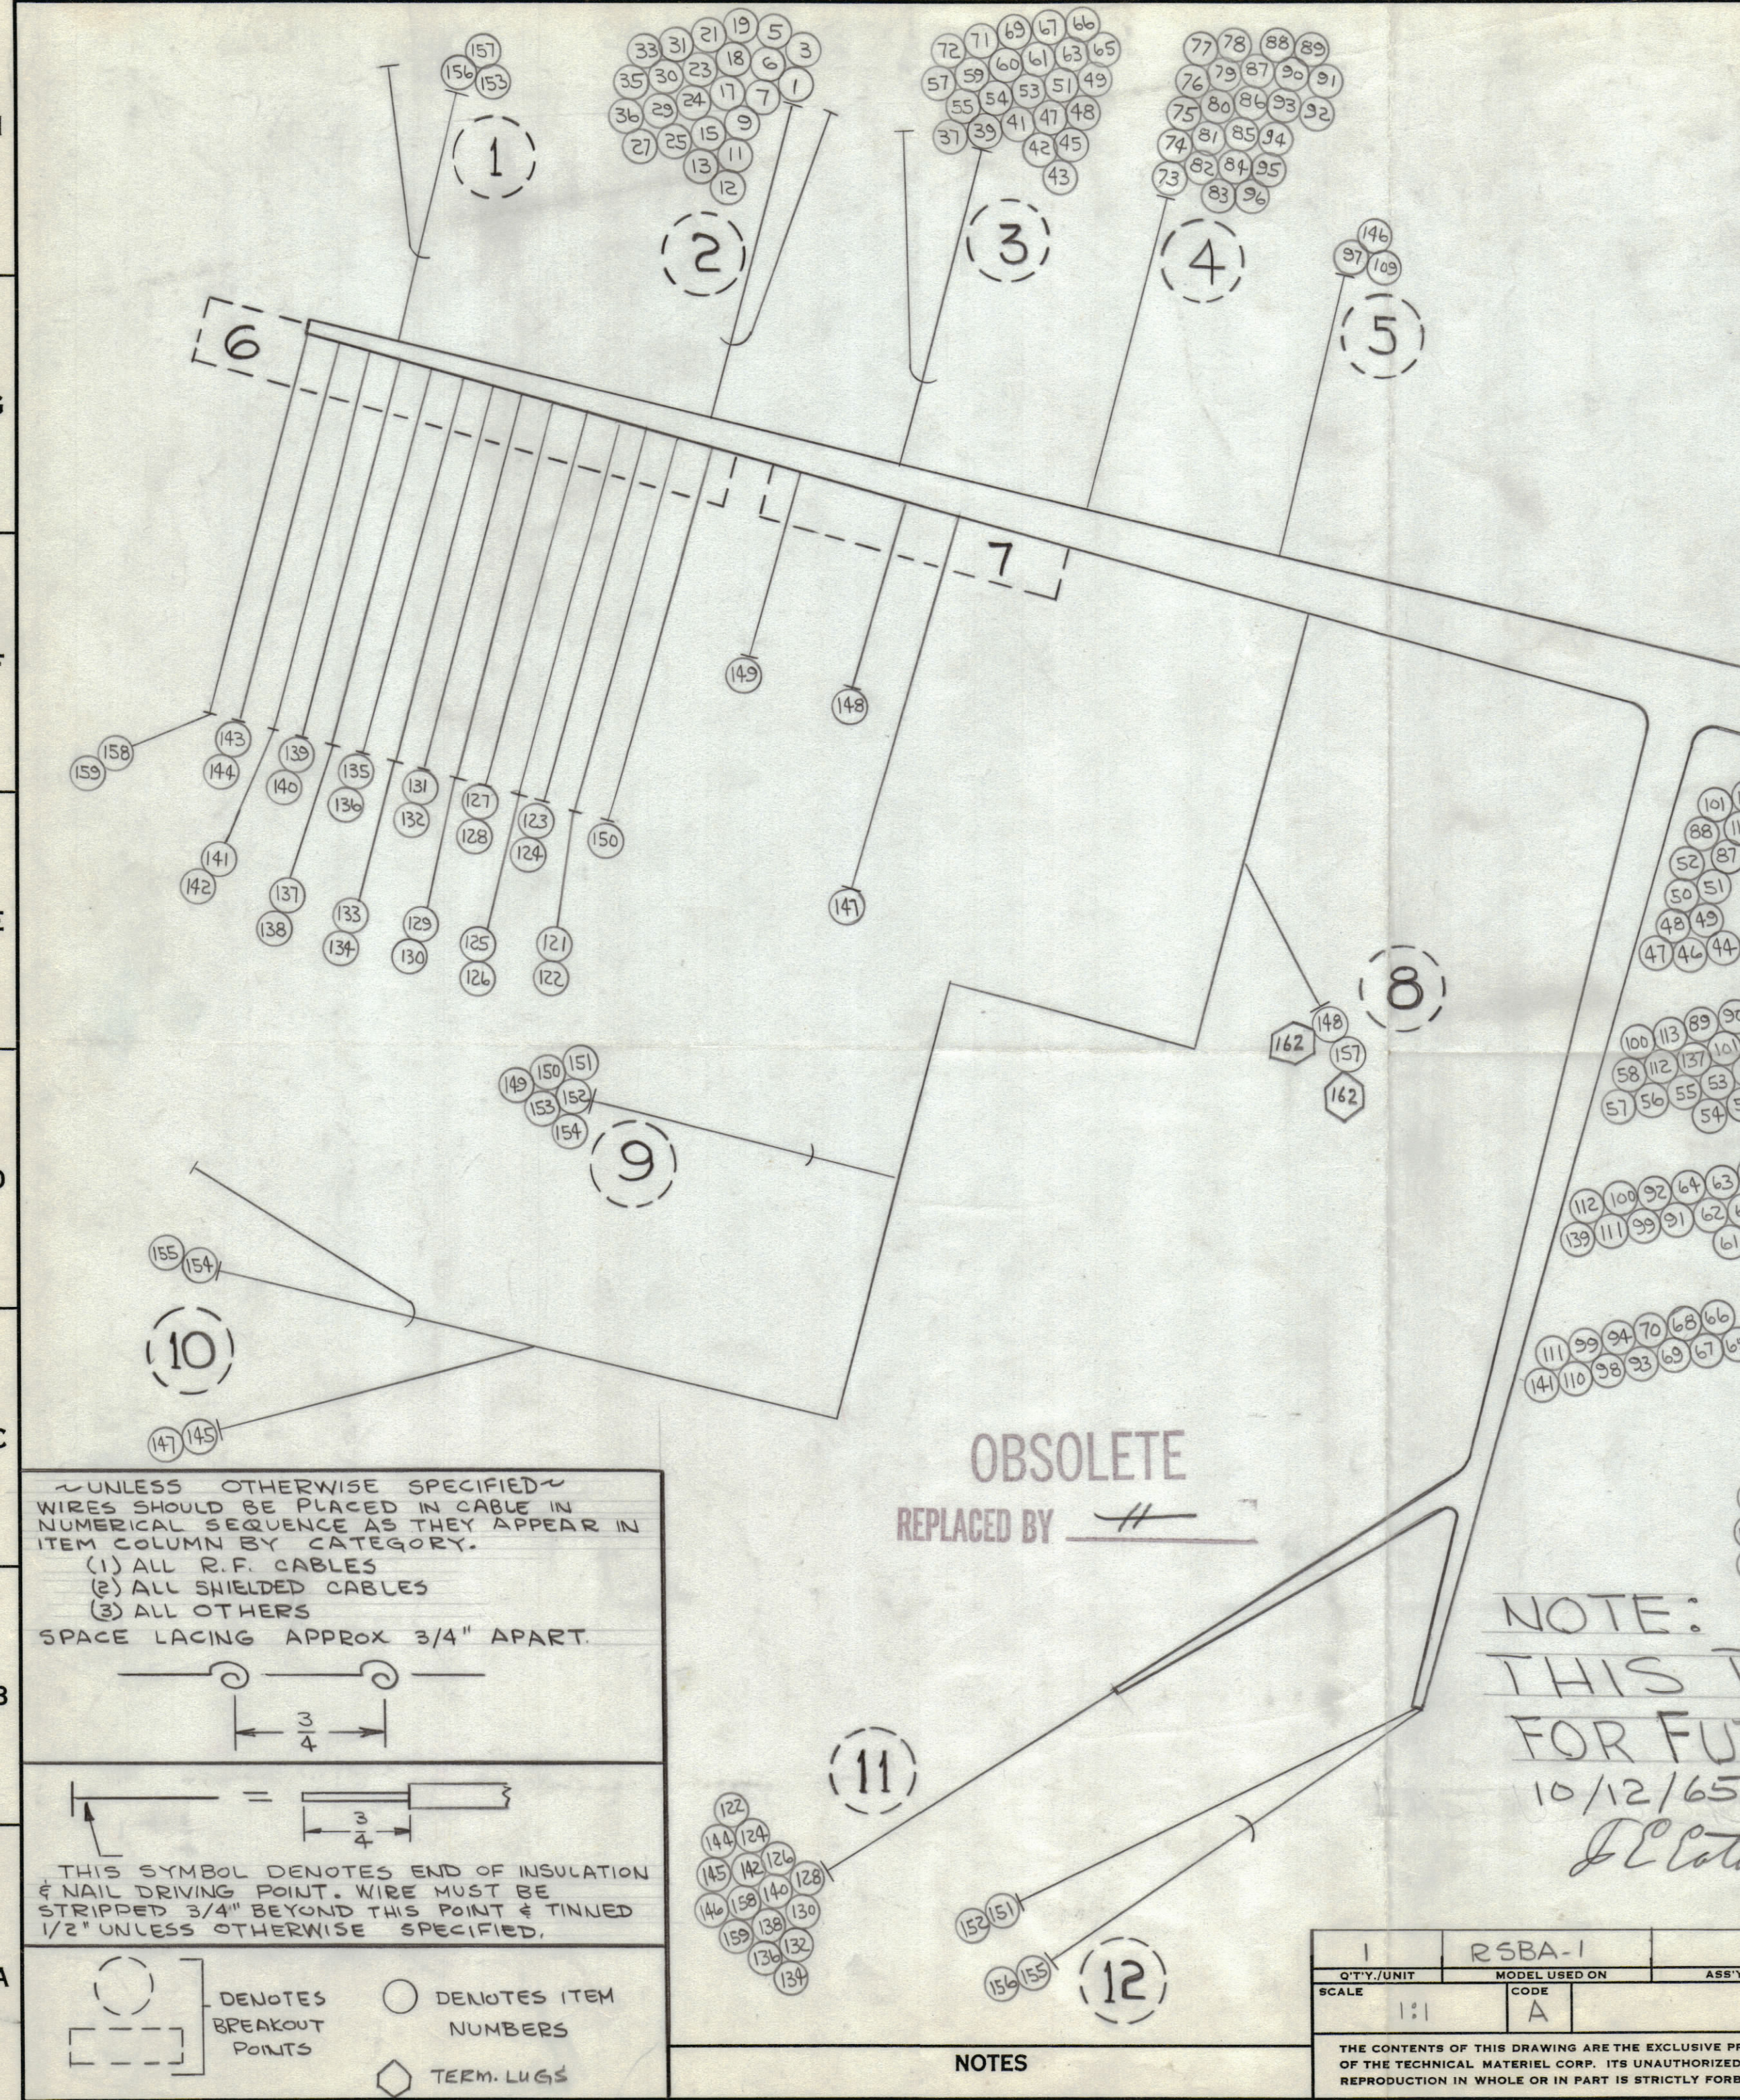


UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

(1) ALL R.F. CABLES
 (2) ALL SHIELDED CABLES
 (3) ALL OTHERS

SPACE LACING APPROX 3/4" APART.

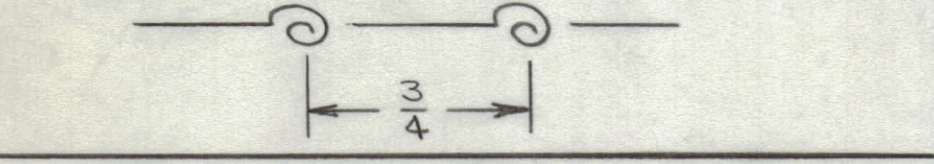


THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT & TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

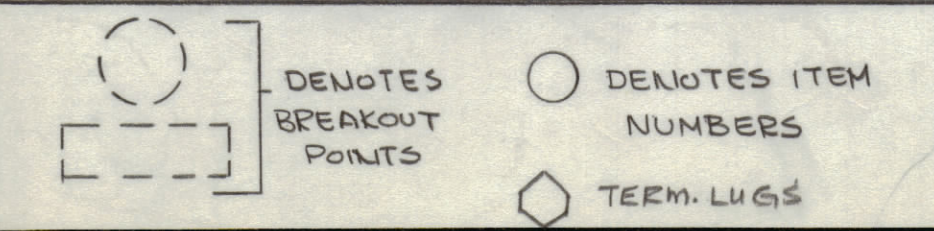

OBSOLETE
 REPLACED BY #

NOTE:
 THIS DRAWING IS NOT TO BE USED FOR FUTURE PRODUCTION MANUFACTURE,
 10/12/65
J.E. Eaton

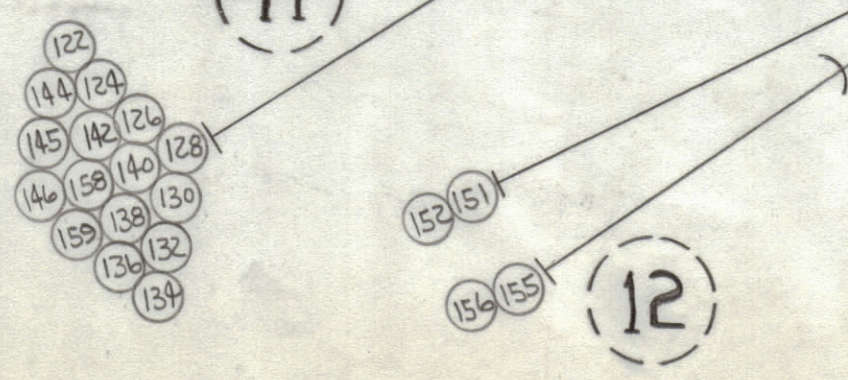

NOTES

1	RSBA-1	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F. EATON LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE WIRING HARNESS, BRANCHED-MAIN	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRWN <i>J. Eaton</i>	DATE 8-22-65
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			CHECKED	DATE
FRACTIONS ± 1/64 ANGLES ± 0° 30'			ELECT. DES.	DATE
TOLERANCES			MECH. DES.	DATE
			FINAL APPROVAL <i>J.E. Eaton</i> 10/12/65	
			SHEET 1 OF 2	
			REV. LTR.	

CA1086