


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		RELEASED FOR PROD.	FEB 18/66		RPL		(Signature)

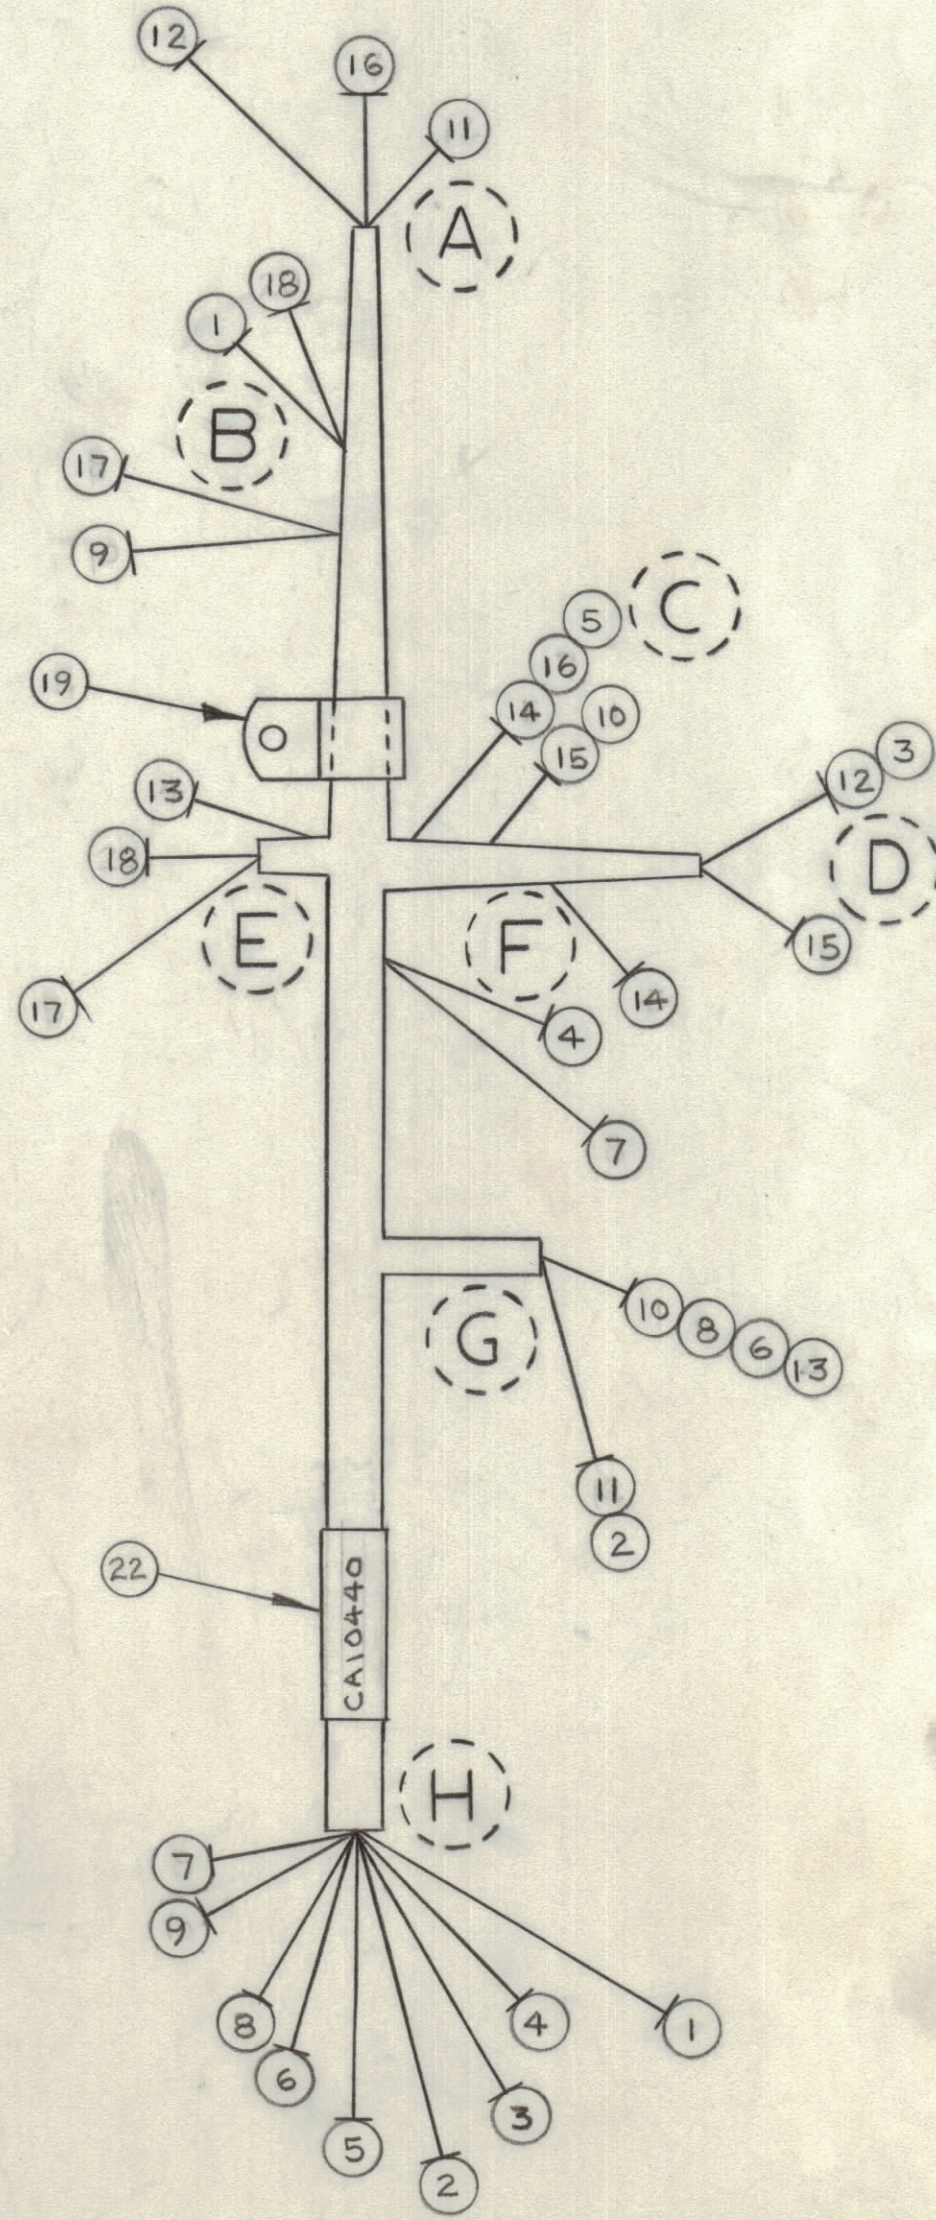

BKOUT (FROM) COMPONENT	BKOUT (TO) COMPONENT	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
B	TI PIN 9	H	A 3211 PIN 1	1	MWC22(7)U91	WIRE, ELECTRICAL INSULATED
G	CI NEGATIVE	H	A 3211 PIN 2	2	MWC22(7)U4	
D	EI PIN 9	H	A 3211 PIN 3	3	MWC22(7)U5	
F	KI PIN 4	H	A 3211 PIN 4	4	MWC22(7)U9	
C	EI PIN 4	H	A 3211 PIN 5 & 6	5	MWC22(7)U6	
G	CRB GRD. LUG	H	A 3211 PIN 7	6	MWC22(7)U0	
F	KI PIN 1	H	A 3211 PIN 9	7	MWC22(7)U9	
G	CRB CATHODE	H	A 3211 PIN 10	8	MWC22(7)U2	
B	TI PIN 10	H	A 3211 PIN 11	9	MWC22(7)U91	
C	EI PIN 5	G	CRB CATHODE	10	MWC22(7)U2	
A	QI COLLECTOR	G	CI NEGATIVE	11	MWC22(7)U4	
A	QI BASE	D	EI PIN 9	12	MWC22(7)U5	
E	EI PIN 3	G	CRB GRD. LUG	13	MWC22(7)U0	
C	EI PIN 4	F	KI PIN 9	14	MWC22(7)U6	
C	EI PIN 5	D	CR6 CATHODE	15	MWC22(7)U2	
A	QI EMITTER	C	EI PIN 4	16	MWC22(7)U6	
B	TI PIN 2	E	EI PIN 1	17	MWC22(7)U90	
B	TI PIN 7	E	EI PIN 2	18	MWC22(7)U90	WIRE, ELECTRICAL INSULATED
				19	CU 102-3	CLAMP "G" TYPE
				AR 20	CD101-1-MW	CORD, NYLON LACING
				AR 21	BS-100	SOLDER, TIN ALLOY
				1"	PX100-9-.375	SLEEVING, MARKED CA10440 C/W LATEST REVISION LETTER

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

CA10440 Ø

TOLERANCES

ALL OTHERS	DEC. DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
	FRAC. DIM. ±	
	ANGULAR DIM. ±	

SCALE: 1:1

VLRE-1	035/66	JAN 27/66
MODEL	PROJECT NO.	DATE
	ASS'Y. NO.	

USED ON

STOCK SIZE	TMC (Canada) LIMITED	
	OTTAWA ONTARIO	
MATERIAL	WIRING, HARNESS BRANCHED	
WEIGHT PER FC.	POWER SUPPLY	
TYPE & TEMPER.	RPL	(Signature)
	DRWN	ELEC. DES. APP.
	(Signature)	(Signature)
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL
		CA10440 Ø
FINISH & SPEC. NO.		