


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0		REL. TO PROD.	FEB 24/66		GM		(Signature)
A		ITEM 5 SHORTENED ITEM 7 & 8 BKOUT(B) INTERCHANGED ITEM 8 BKOUT(D) WAS C239	APR 27/66	CEMN 002	RPL	(Signature)	(Signature)
B		ITEM 7 1 3/4 WAS 1 5	JUNE 28/66	CEMN 046	GM	(Signature)	(Signature)

BRK. OUT	FROM COMPONENT	BRK. OUT	TO COMPONENT	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A	STANDOFF	E	C238	14 1/2"	1	MWC22(7)U3	WIRE, NO. 22	
C	R213 (CENTRE)	D	C239	11 1/2"	2	MWC22(7)U5	↑ ↓	
C	R216 (CCW)	D	STANDOFF	11"	3	MWC22(7)U8	↑ ↓	
C	STANDOFF	D	C260	8 3/8"	4	MWC22(7)U91	WIRE, NO 22	
C	R216 (CW)	E	FEEDTHRU	10 1/4"	5	MWC 16 (19)U98	WIRE, NO 16	
					AR	6	CD101-3MW	LACING, CORD
B	R221 (CW TERM)	D	C284	13 3/4"	7	MWC22(7)U4	WIRE, ELEC.	
B	STANDOFF	D	C285	15 1/2"	8	MWC22(7)U96	WIRE, NO. 22	
A	STANDOFF	B	R216 (CENTRE)	11 1/2"	9	MWC22(7)U8	" " "	
A	C244	B	R221 (CENTRE)	12"	10	MWC22(7)U5	WIRE, NO. 22	

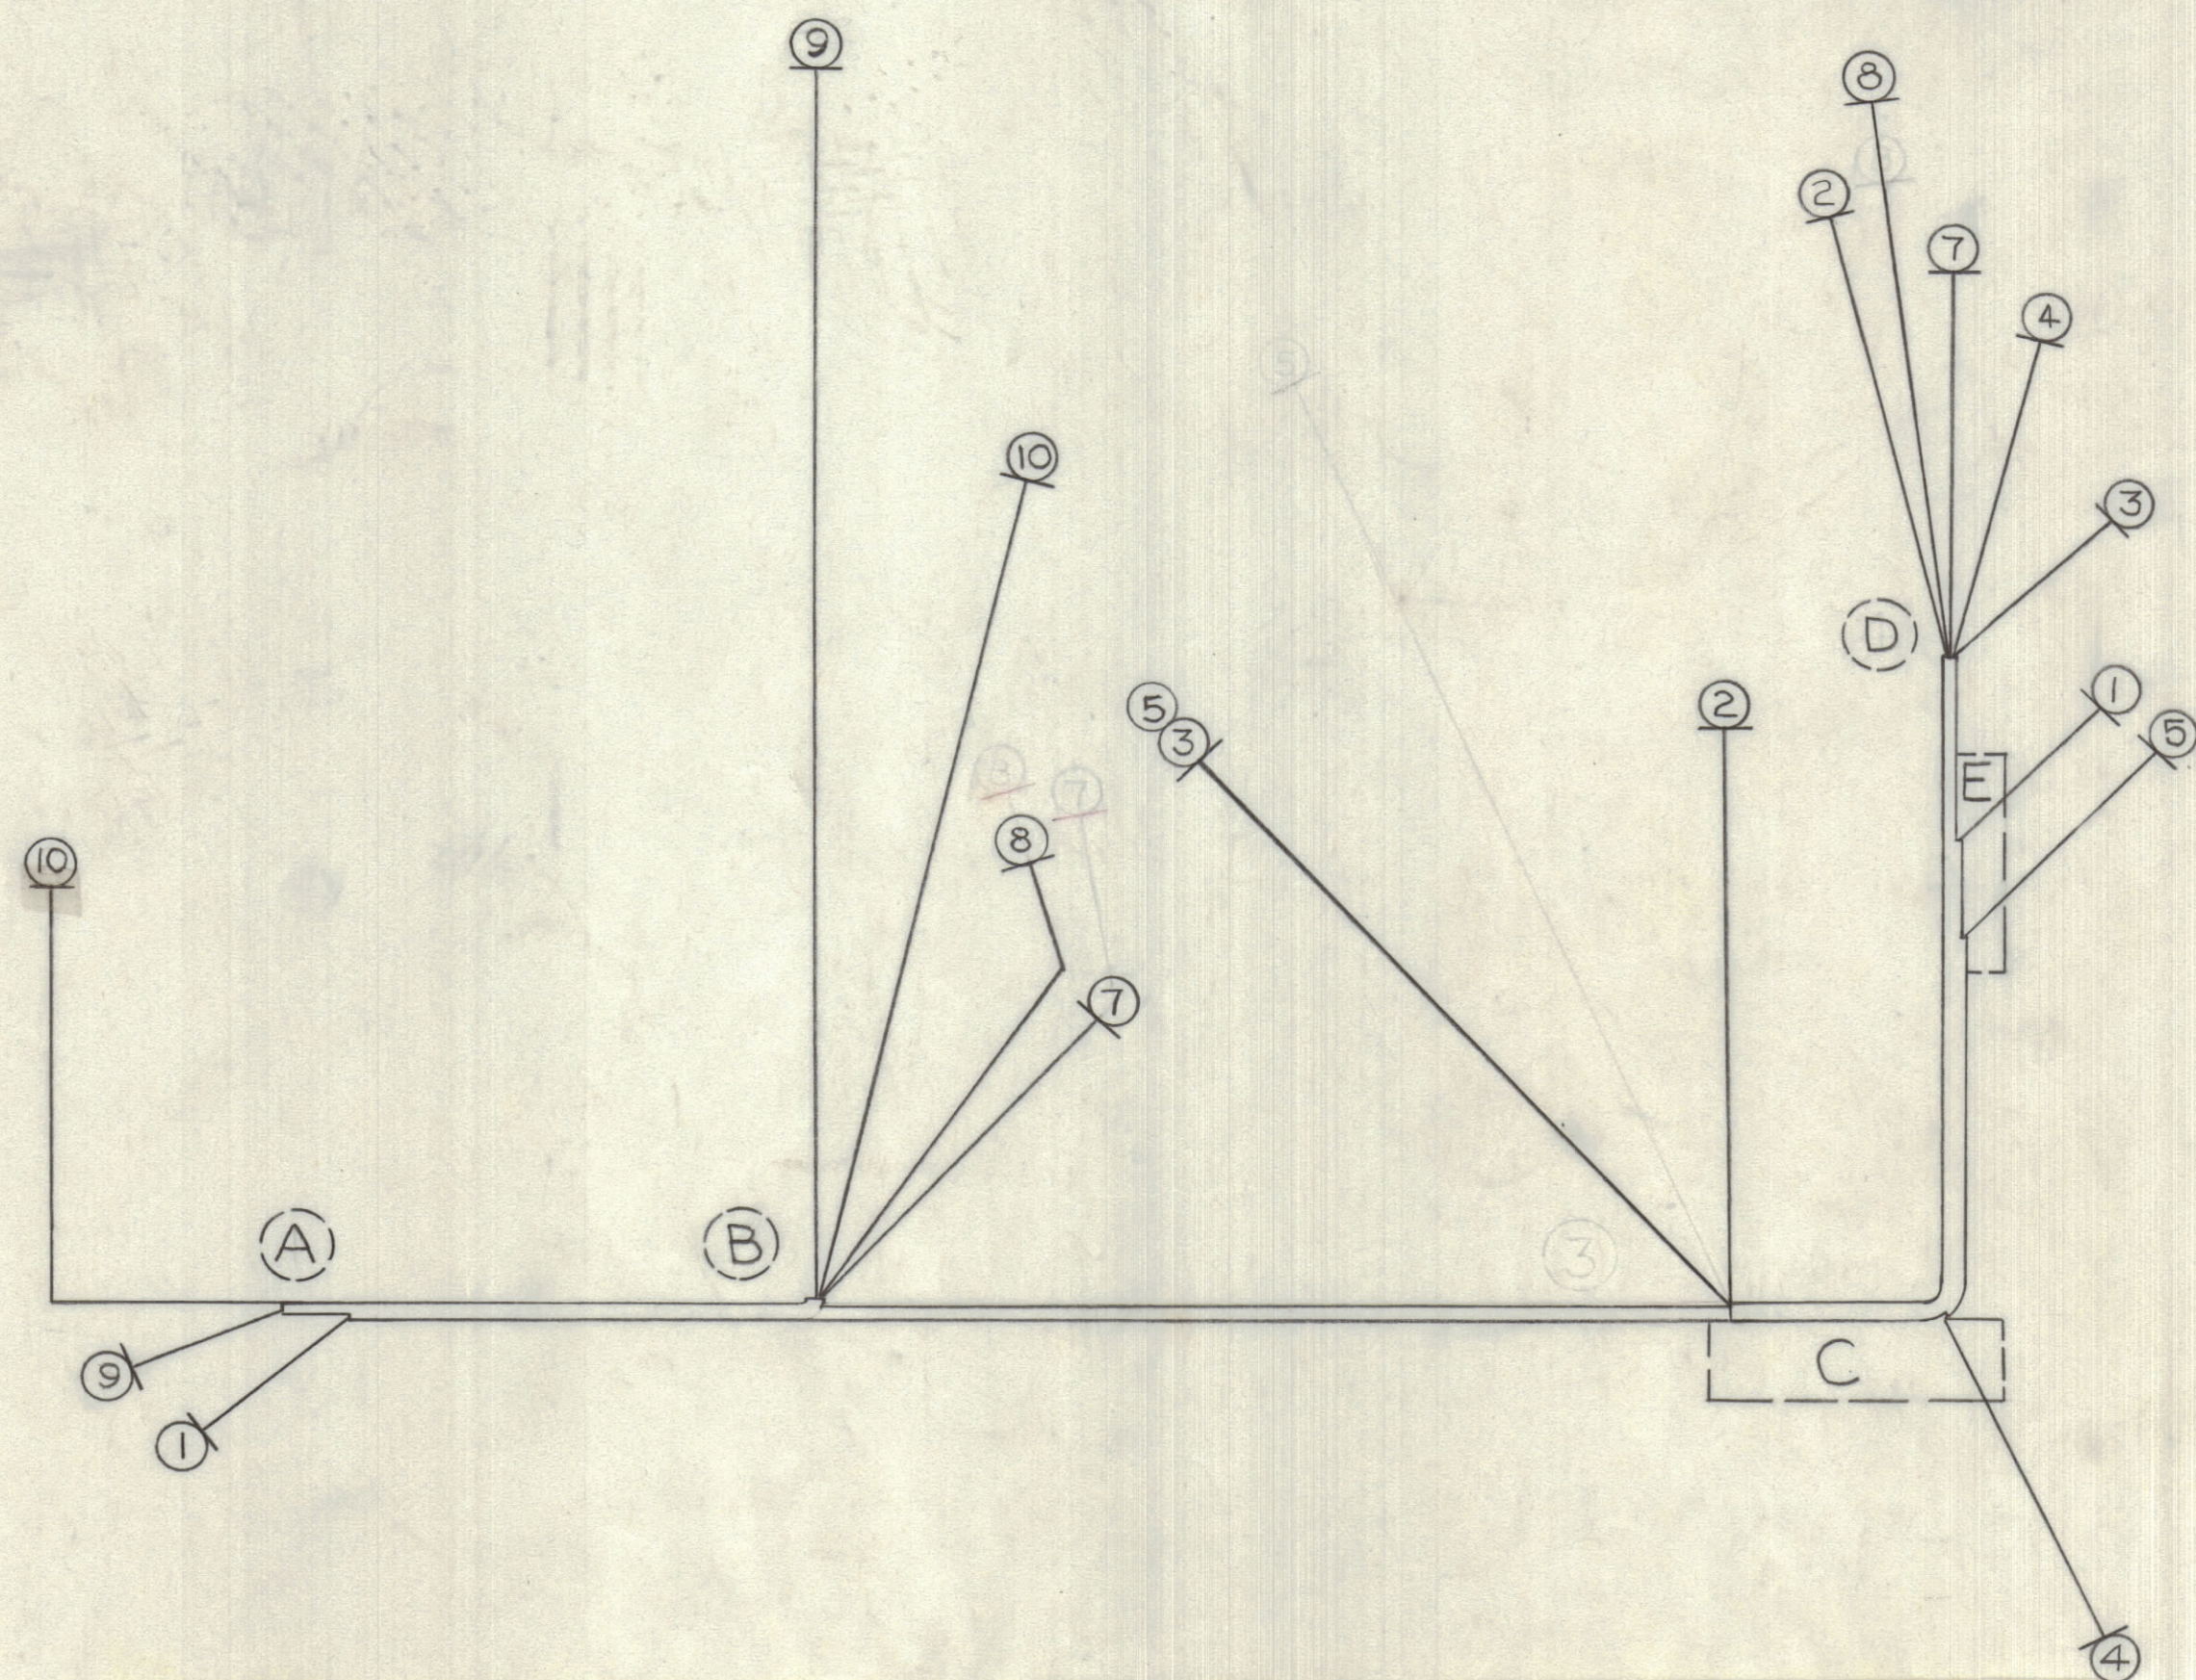

CA10442 B

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

TOLERANCES	SCALE: 1:1
ALL OTHERS	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

RFE-1	028/66	23-2-66
MODEL	PROJECT NO.	DATE

STOCK SIZE		ARCHARD	
MATERIAL		TMC (Canada) LIMITED OTTAWA ONTARIO	
WEIGHT PER PC.		CABLE ASSEMBLY	
TYPE & TEMPER		RF SECTION	
HEAT TREAT. SPEC.		GAM	(Signature)
FINISH & SPEC. NO.		DRN	(Signature)
		CHECKED	ENCL. APPROVAL
		CA10442 B	