


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		REDRAWN	FEB 25 69			AP	
X ₁		REVISED AS PER MARK-UP PRINT	MAR 4/69			AP	<i>[Signature]</i>

PX 100-9-263 WAS 294

FROM	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A6 PIN 1	J18	1		RG 174/U	CABLE RF COAXIAL	
A6 PIN 2	J19	2				
A6 PIN 3	J20	3				
A6 PIN 4	J21	4				
A6 PIN 5	J22	5				
A6 PIN 6	J23	6				
A6 PIN 7	J24	7				
A6 PIN 8	J25	8		RG 174/U	CABLE RF COAXIAL	
16"	9			WL 100-6	WIRE BUSS	
8	10			CU 142-8	STRAP CABLE	
16	11			CU 10018-1	FERRULE	
.60"	12			PX 100-9-263	SLEEVING MARKED CA10540 C/W LATEST REVISION LETTER	

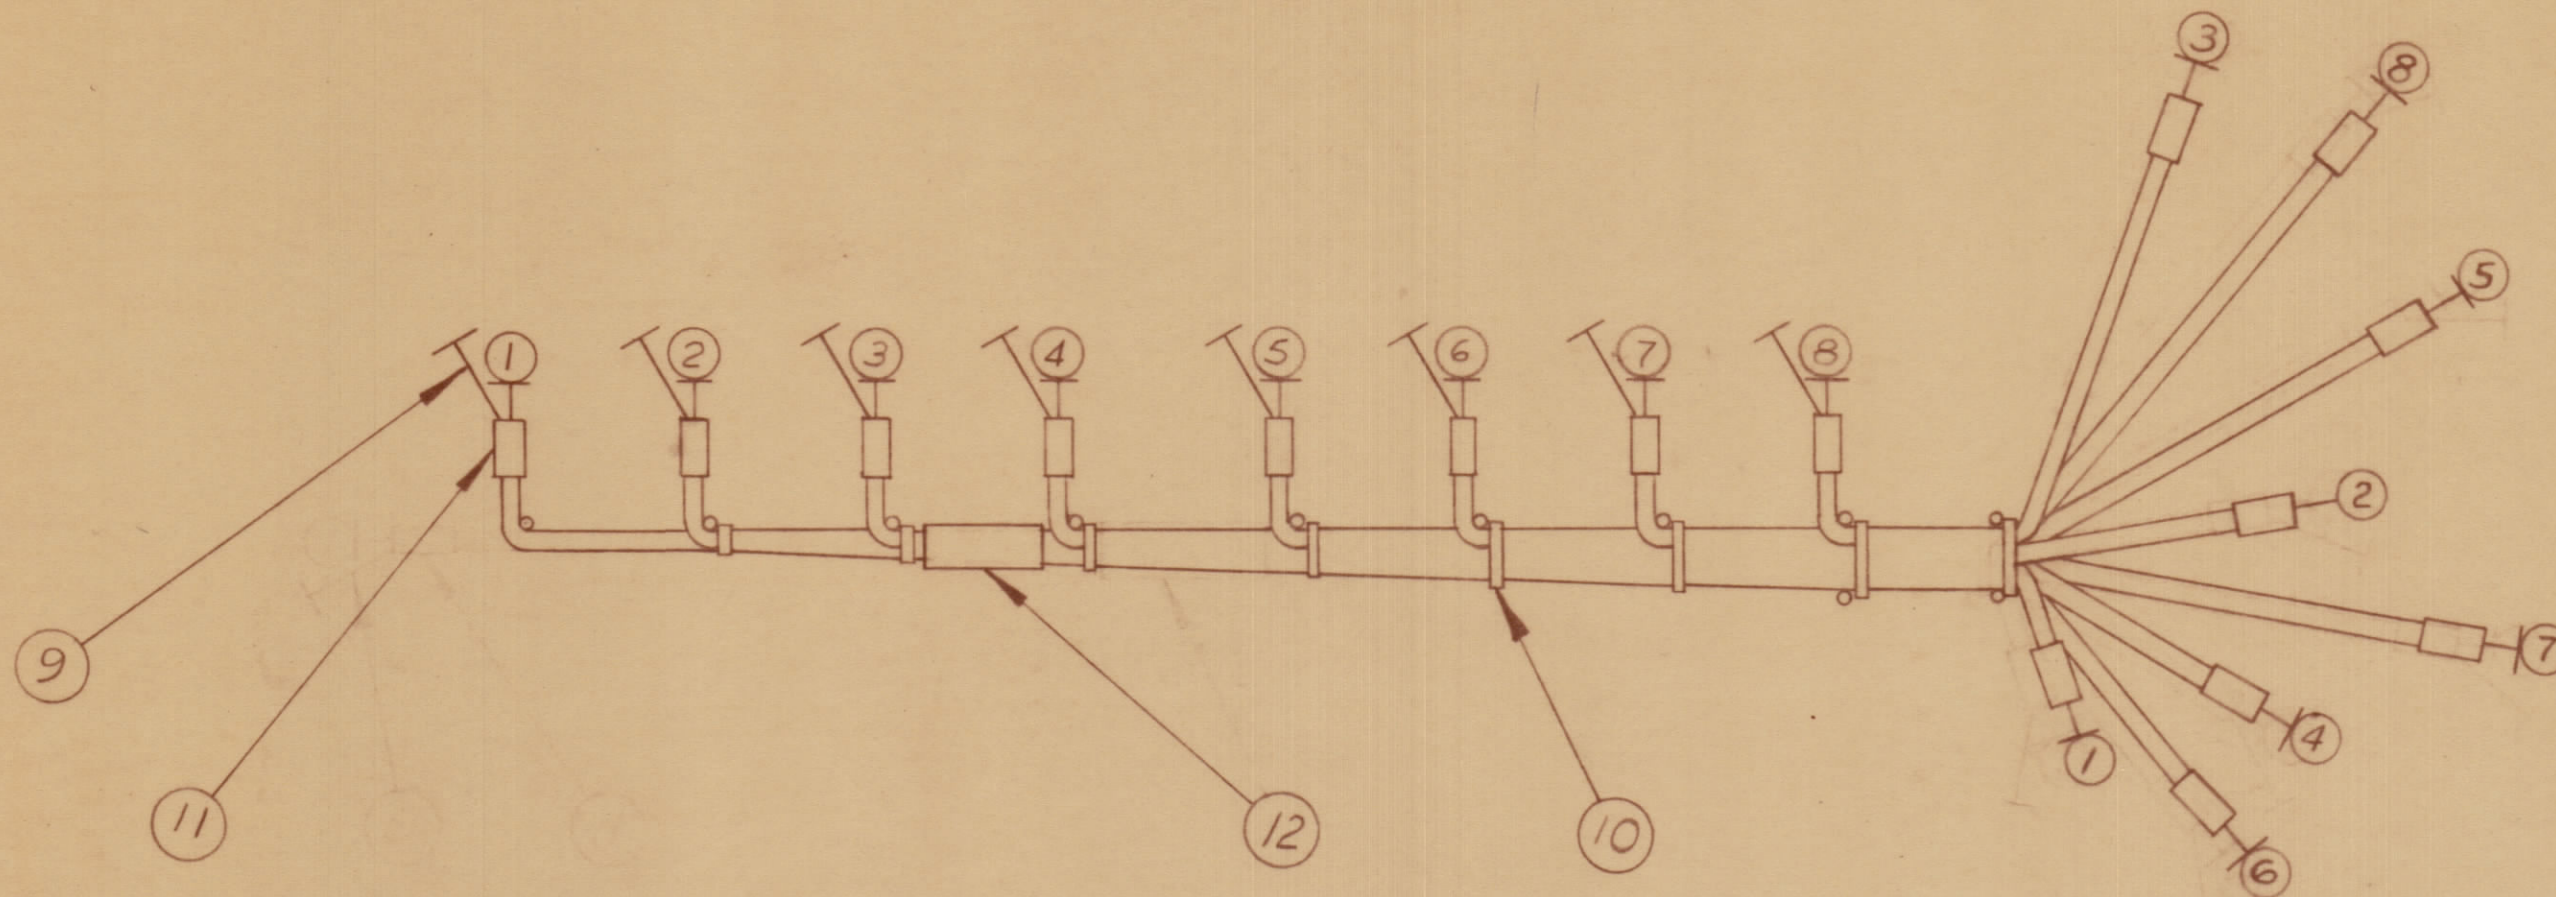

CA10540 X₁

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

○ DENOTES ITEM

THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED

ASSEMBLE HARNESS, COMMENCING WITH WIRES THROUGH TO WIRE 1.

NOTES

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC DIM ± .01 FRAC DIM ± 1/64 ANGULAR DIM ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AMC 32	074 169	25 FEB 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE, HARNESS, RF	
TYPE & TEMPER		AP	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10540 X ₁	