


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.					DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENGINEERING REL.	MAR 28, 69			AHa	
XI		A4 WAS A5; ITEM 12 WAS PX100-9-263	MAR 31, 69			AHa	

FROM	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
PIN 1-A4	J10		1	RG 174/U	CABLE RF COAXIAL	
2-A4	J11		2			
3-A4	J12		3			
4-A4	J13		4			
5-A4	J14		5			
6-A4	J15		6			
7-A4	J16		7			
8-A4	J17		8	RG 174/U	CABLE RF COAXIAL	
16"	9		9	WL 100-6	WIRE BUS	
8	10		10	CU 142-8	STRAP CABLE	
16	11		11	CU 10018-1	FERRULE	
.60"	12		12	PX 100-9-234	SLEEVING MARKED CA 10550 C/W LATEST REV. LETTER	

**NOTE:**  
WHEN LAYING IN LEADS BEGIN WITH PIN #1 AND PROCEED IN AN ASCENDING ORDER.

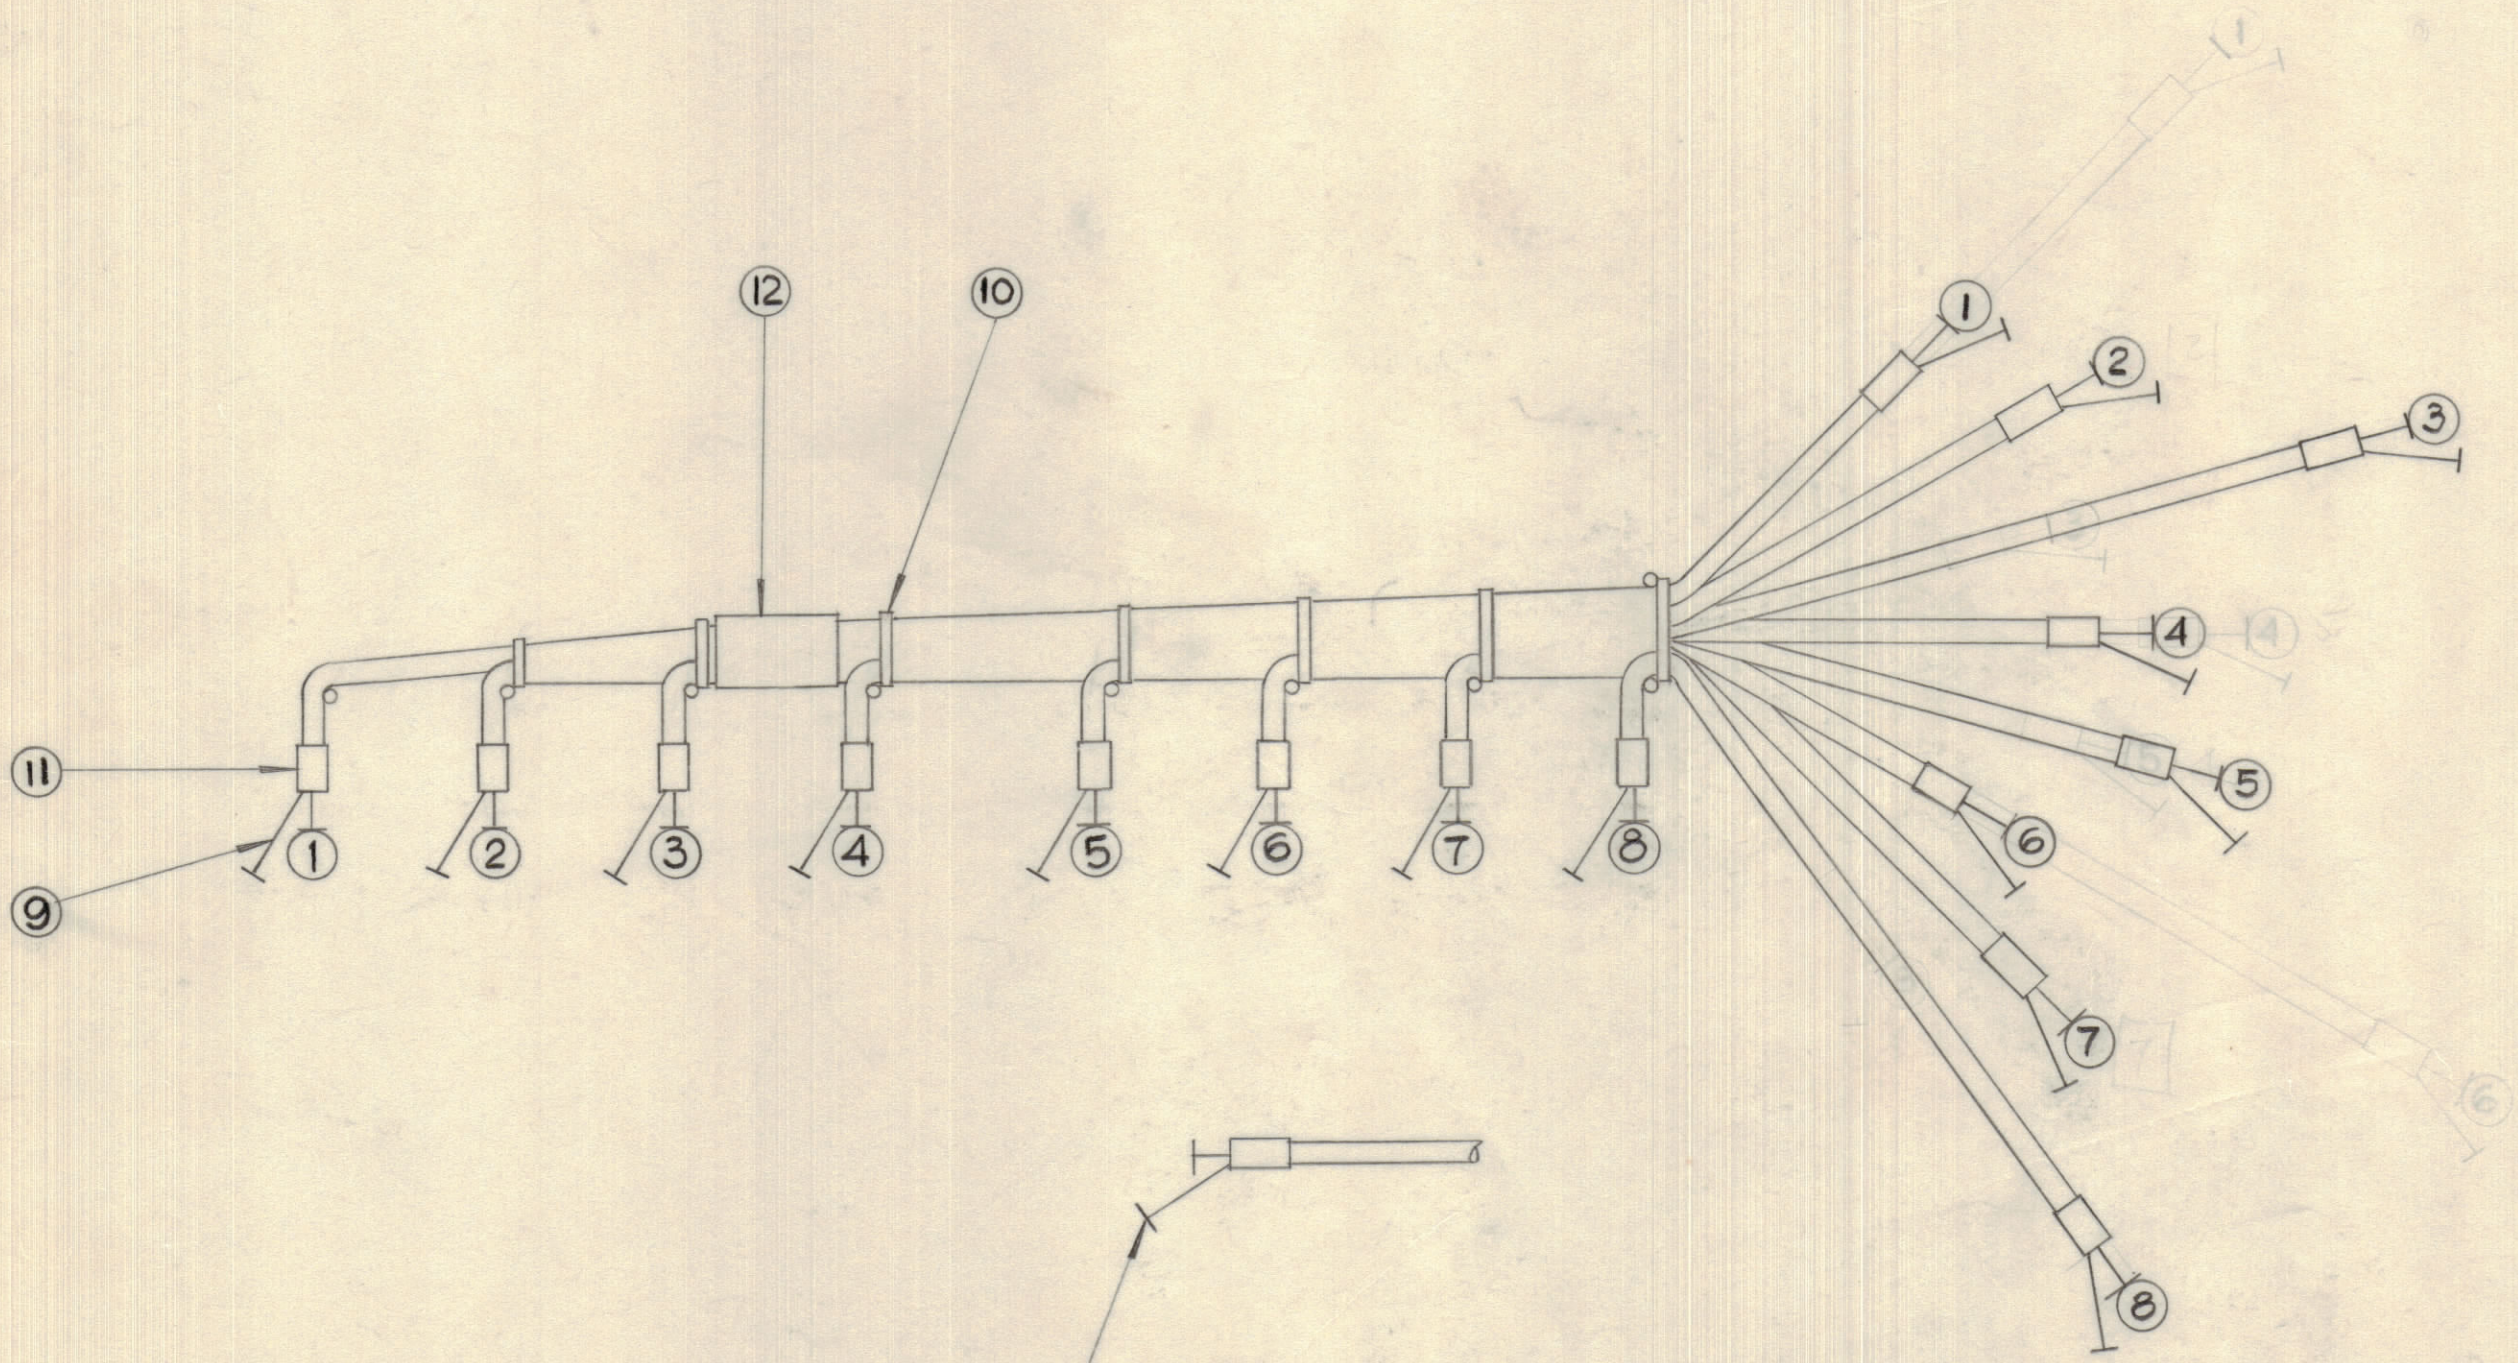

CA 10550 XI

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED.

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± .05 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AMC 32	074 / 69	MAR 28, 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE, HARNESS, RF	
TYPE & TEMPER		AHa	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA 10550 XI	