


CA1105

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	ORIGINAL RELEASE FOR PRODUCTION	5/11/66		CV		fla

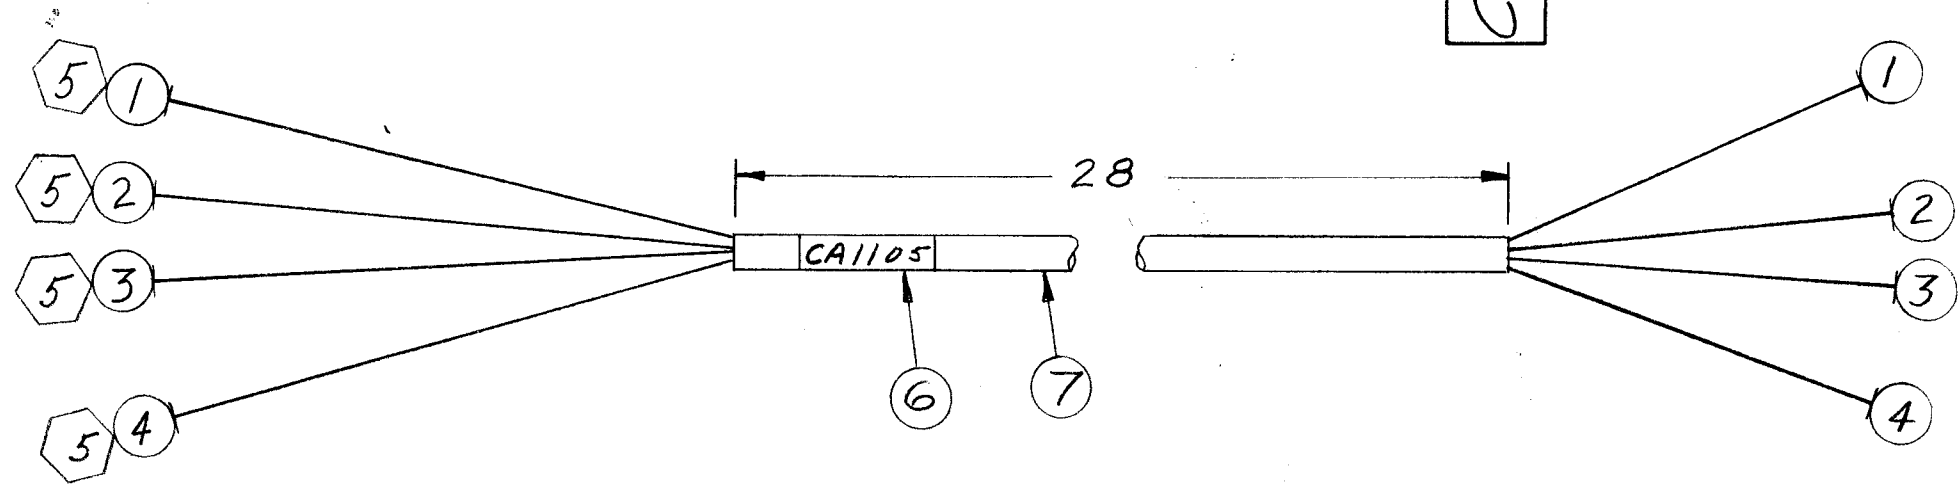

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	8	BS100	SOLDER, SOFT	
	7	PX100-1-208	INS. SLUG	
1	6	LA107-12-CA1105	SLV. MARKER CBL	
4	5	PL242-3	CONT. ELEC. MALE	
	4	MWC20(7)U93	WIRE, ELEC. INS.	
	3	MWC20(7)U92		
	2	MWC20(7)U91		
	1	MWC20(7)U90	WIRE, ELEC. INS.	

LIST OF MATERIAL

B.NAP

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CABLE, SPECIAL PURPOSE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN <i>SM</i>	DATE 4-30-65	FINAL APPROVAL <i>JB</i>	DATE 5/11/66
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	CHECKED <i>SM</i>	DATE 3/22/65	DATE 5/11/66	DATE 5/11/66
FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES.	DATE	DATE	DATE
TOLERANCES	MECH. DES.	DATE	DATE	DATE

MIL 23 5/11/66

SHEET REV. LTR.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

1	TSTE10K/AX563	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.