



REQ. PER UNIT	MODEL	USED ON
1	KIT 180	ASSY. NO.
		DATE
		5 JAN 66
		CA1206

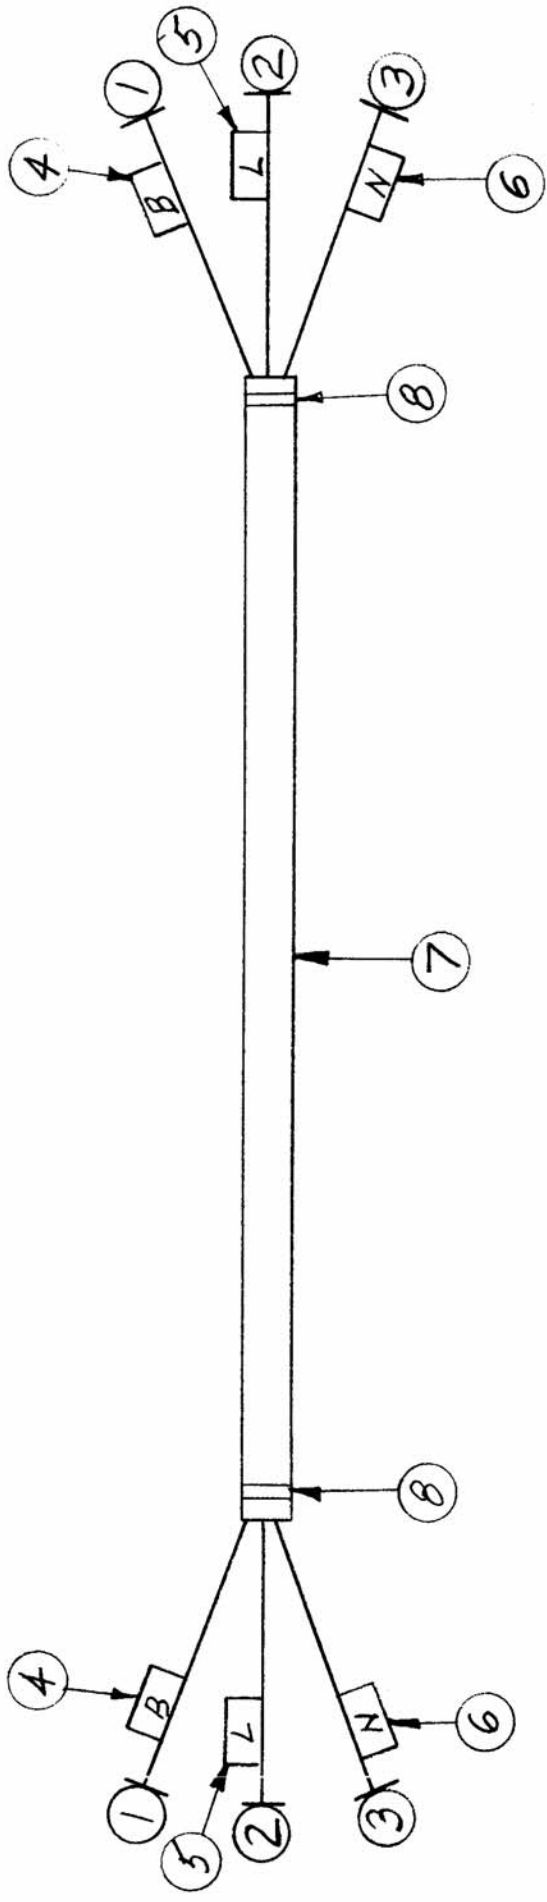

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 10			
X 9	B5100	SOLDER, TIN ALY	
X 8	CD101-1MW	CD, NYLON, LACING	
6 7	PX100-1-234	INS SLVG	
2 6	LA101-N	BAND, MARKER, CBL	
2 5	LA101-L	BAND, MARKER, CBL	
2 4	LA101-B	BAND, MARKER, CBL	
3	MWC 16(19)U 9	WIRE, ELEC, INS	
2	MWC 16(19)U 9B	WIRE, ELEC, INS	
1	MWC 16(19)U 8	WIRE, ELEC, INS	

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
CABLE, SPECIAL PURPOSE	
DATE	CHECKED
2/2/66	AD
DRAWN	MECH. DES. APP.
RJP	
FINISH & SPEC. NO.	
CA1206	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	2/2/66				AD
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						
DECIMALS	TOLERANCES	FRACTIONS	CODE			
.X ± .05	± 1/64	± 1/32				
.XX ± .01	± 0° 30'	± 0° 30'				
.XXX ± .005						