


REQ. PART UNIT	1
MODEL	KIT 180
ASSY. NO.	
DATE	5 JAN 66
USED ON	CA1209

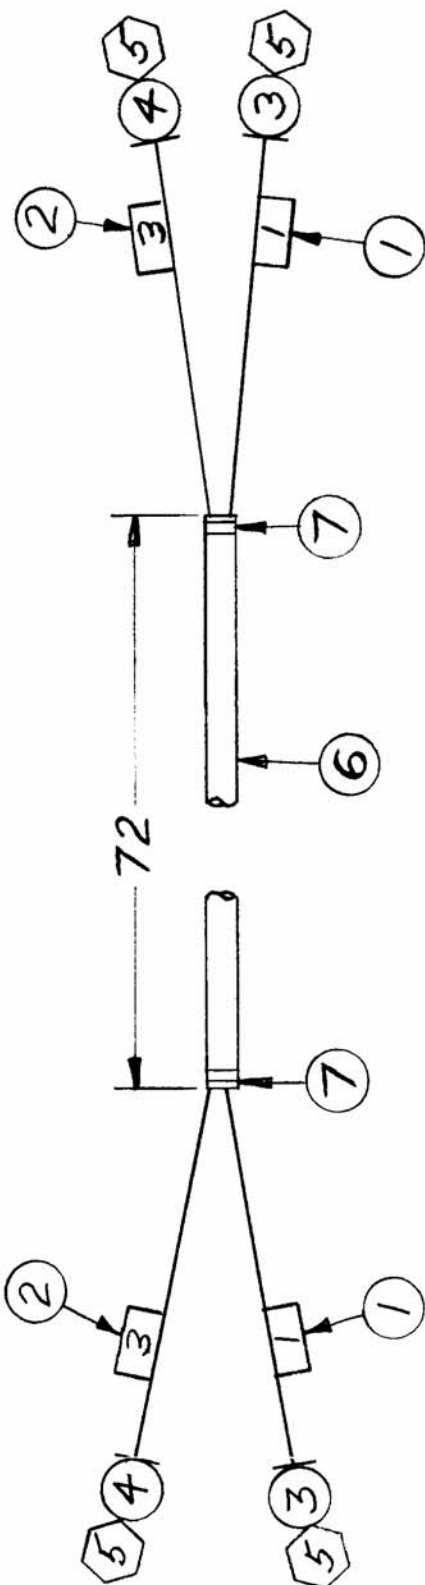

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 7	CD101-1MW	CD, NYLON, LACING	
72 6	PX100-1-166	INS SLVG	
4 5	TE120-2	TERM, LUG-SPADE NO. 6	
4 4	MWC20(7)U91	WIRE, ELEC, INS	
3 3	MWC20(7)U90	WIRE, ELEC, INS	
2 2	LA101-3	BAND, MARKER, CBL	
2 1	LA101-1	BAND, MARKER, CBL	
STOCK SIZE		THE TECHNICAL MATERIEL CORP. NEW YORK	
MATERIAL		CABLE, SPECIAL PURPOSE	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
		<i>DM</i>	<i>4/2/66</i>
FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.	
		<i>RJP</i>	<i>CA1209</i>

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	4/2/66				<i>HLO</i>
XI	IT 2 w25 -2	14 JAN 66		<i>DM</i>		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						
TOLERANCES		FRACTIONS		CODE		
X ± .05		± 1/64				
.XX ± .01		ANGLES				
.XXX ± .005		± 0° 30'				