


REQ. PER UNIT	1
MODEL	KIT 180
ASSY. NO.	
DATE	5 JAN 66
USED ON	CA1211

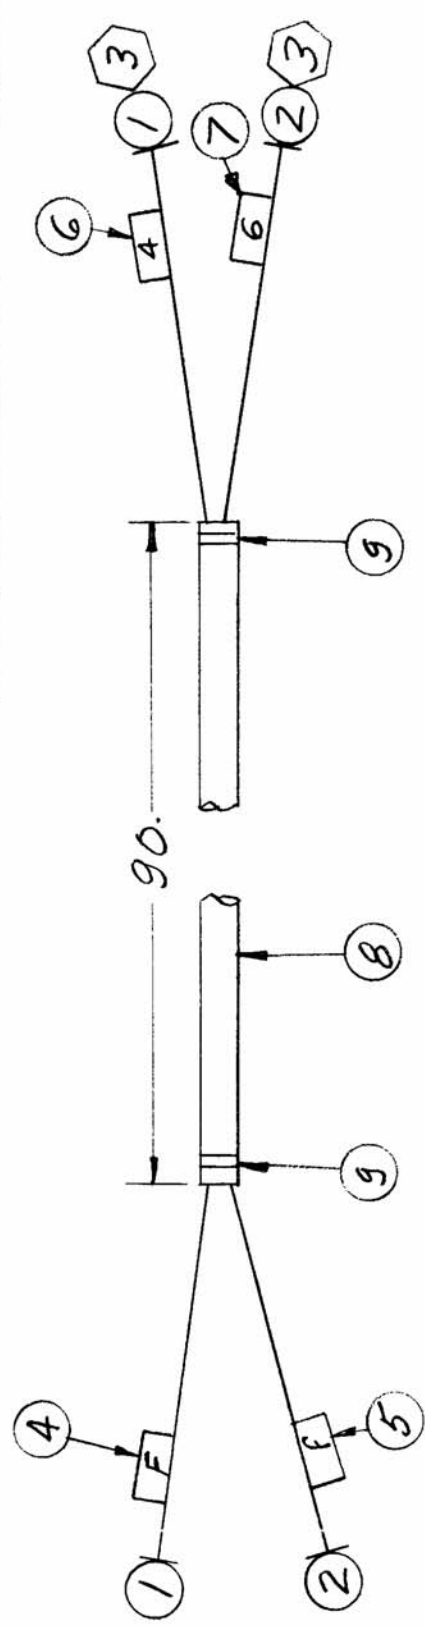

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 10	BS100	SOLDER, TIN ALY	
X 9	CD101-1MW	CD, NYLON, LACING	
	PX100-1-166	INS SLVG	
1 7	LA101-6	BAND, MARKER, CBL	
1 6	LA101-4	BAND, MARKER, CBL	
1 5	LA101-9	BAND, MARKER, CBL	
1 4	LA101-F	BAND, MARKER, CBL	
2 3	TE120-2	TERM., LUG-SPADE NO. 6	
2 2	MWC20(7)U3	WIRE, ELEC, INS	
1 1	MWC20(7)U3	WIRE, ELEC, INS	

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
CABLE, SPECIAL PURPOSE	
MATERIAL	
TYPE & TEMPER	HEAT TREAT. SPEC.
DRAWN	CHECKED
RSP	MECH. DES. APP.
FINISH & SPEC. NO.	ELEC. DES. APP.

DATE	2/2/66	CH. NO.		DRAFTS	CHECKER	ENG. APP.
DESCRIPTION	ORIGINAL RELEASE					
SCALE	90" was 84"					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		FRACTIONS		TOLERANCES		CODE
		± 1/64		± 0° 30'		
		± .005				