
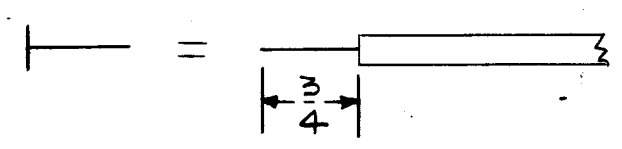


CA1223

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
XI	ITEMS 5 & 6 ADDED	2-11-66	<del>M</del>	Jc		
<del>A</del>	<del>ORIGINAL RELEASE FOR PRODUCTION</del>	8/18/69	<del>O</del>			

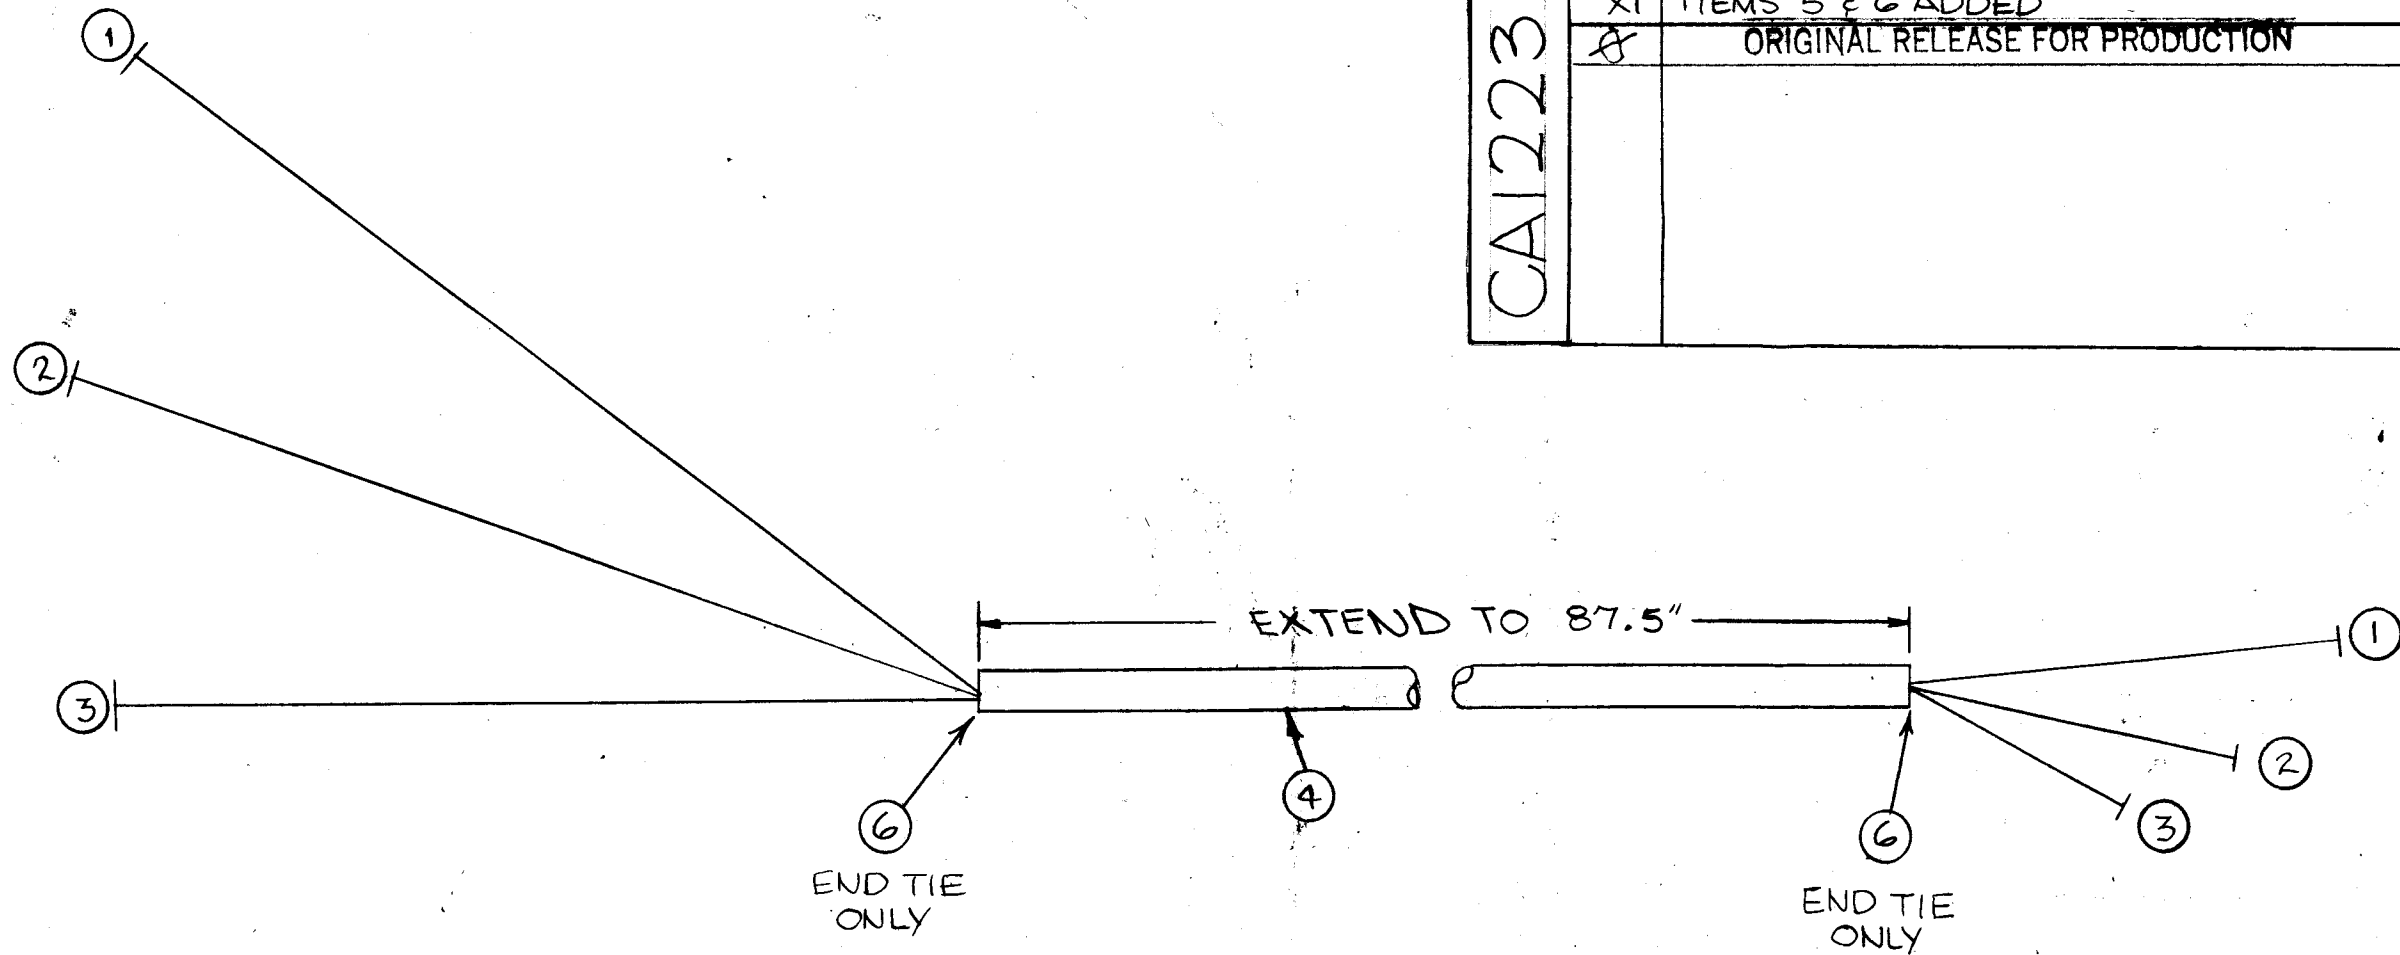

Symbol denotes end of insulation & nail driving point. Wire must be stripped 3/4" beyond this point & tinned 1/2" unless otherwise specified.

NOTES

1		KIT 224S		ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON			
SCALE	CODE			
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.				

6	CD101-1MW	CORD LACING		
5	BS100	SOLDER, SOFT TIN ALLOY		
4	PX100-1-166	INSULATION, SLEEVING		
3	MWC22(7)U2	WIRE, INSULATED		
2	MWC22(7)U4	WIRE, INSULATED		
1	MWC22(7)U6	WIRE, INSULATED		
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

BUDETTI		LIST OF MATERIAL	
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH		TITLE CABLE, ASS'Y, S/P	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED JCB	DATE 2/11/66
FRACTIONS ± 1/84 ANGLES ± 0° 30'		ELECT. DES. LB	DATE
TOLERANCES		MECH. DES.	DATE
		FINAL APPROVAL SR [Signature]	
		DATE 2/11/69	
		SHEET CA1223	
		REV. LTR. Ø	