
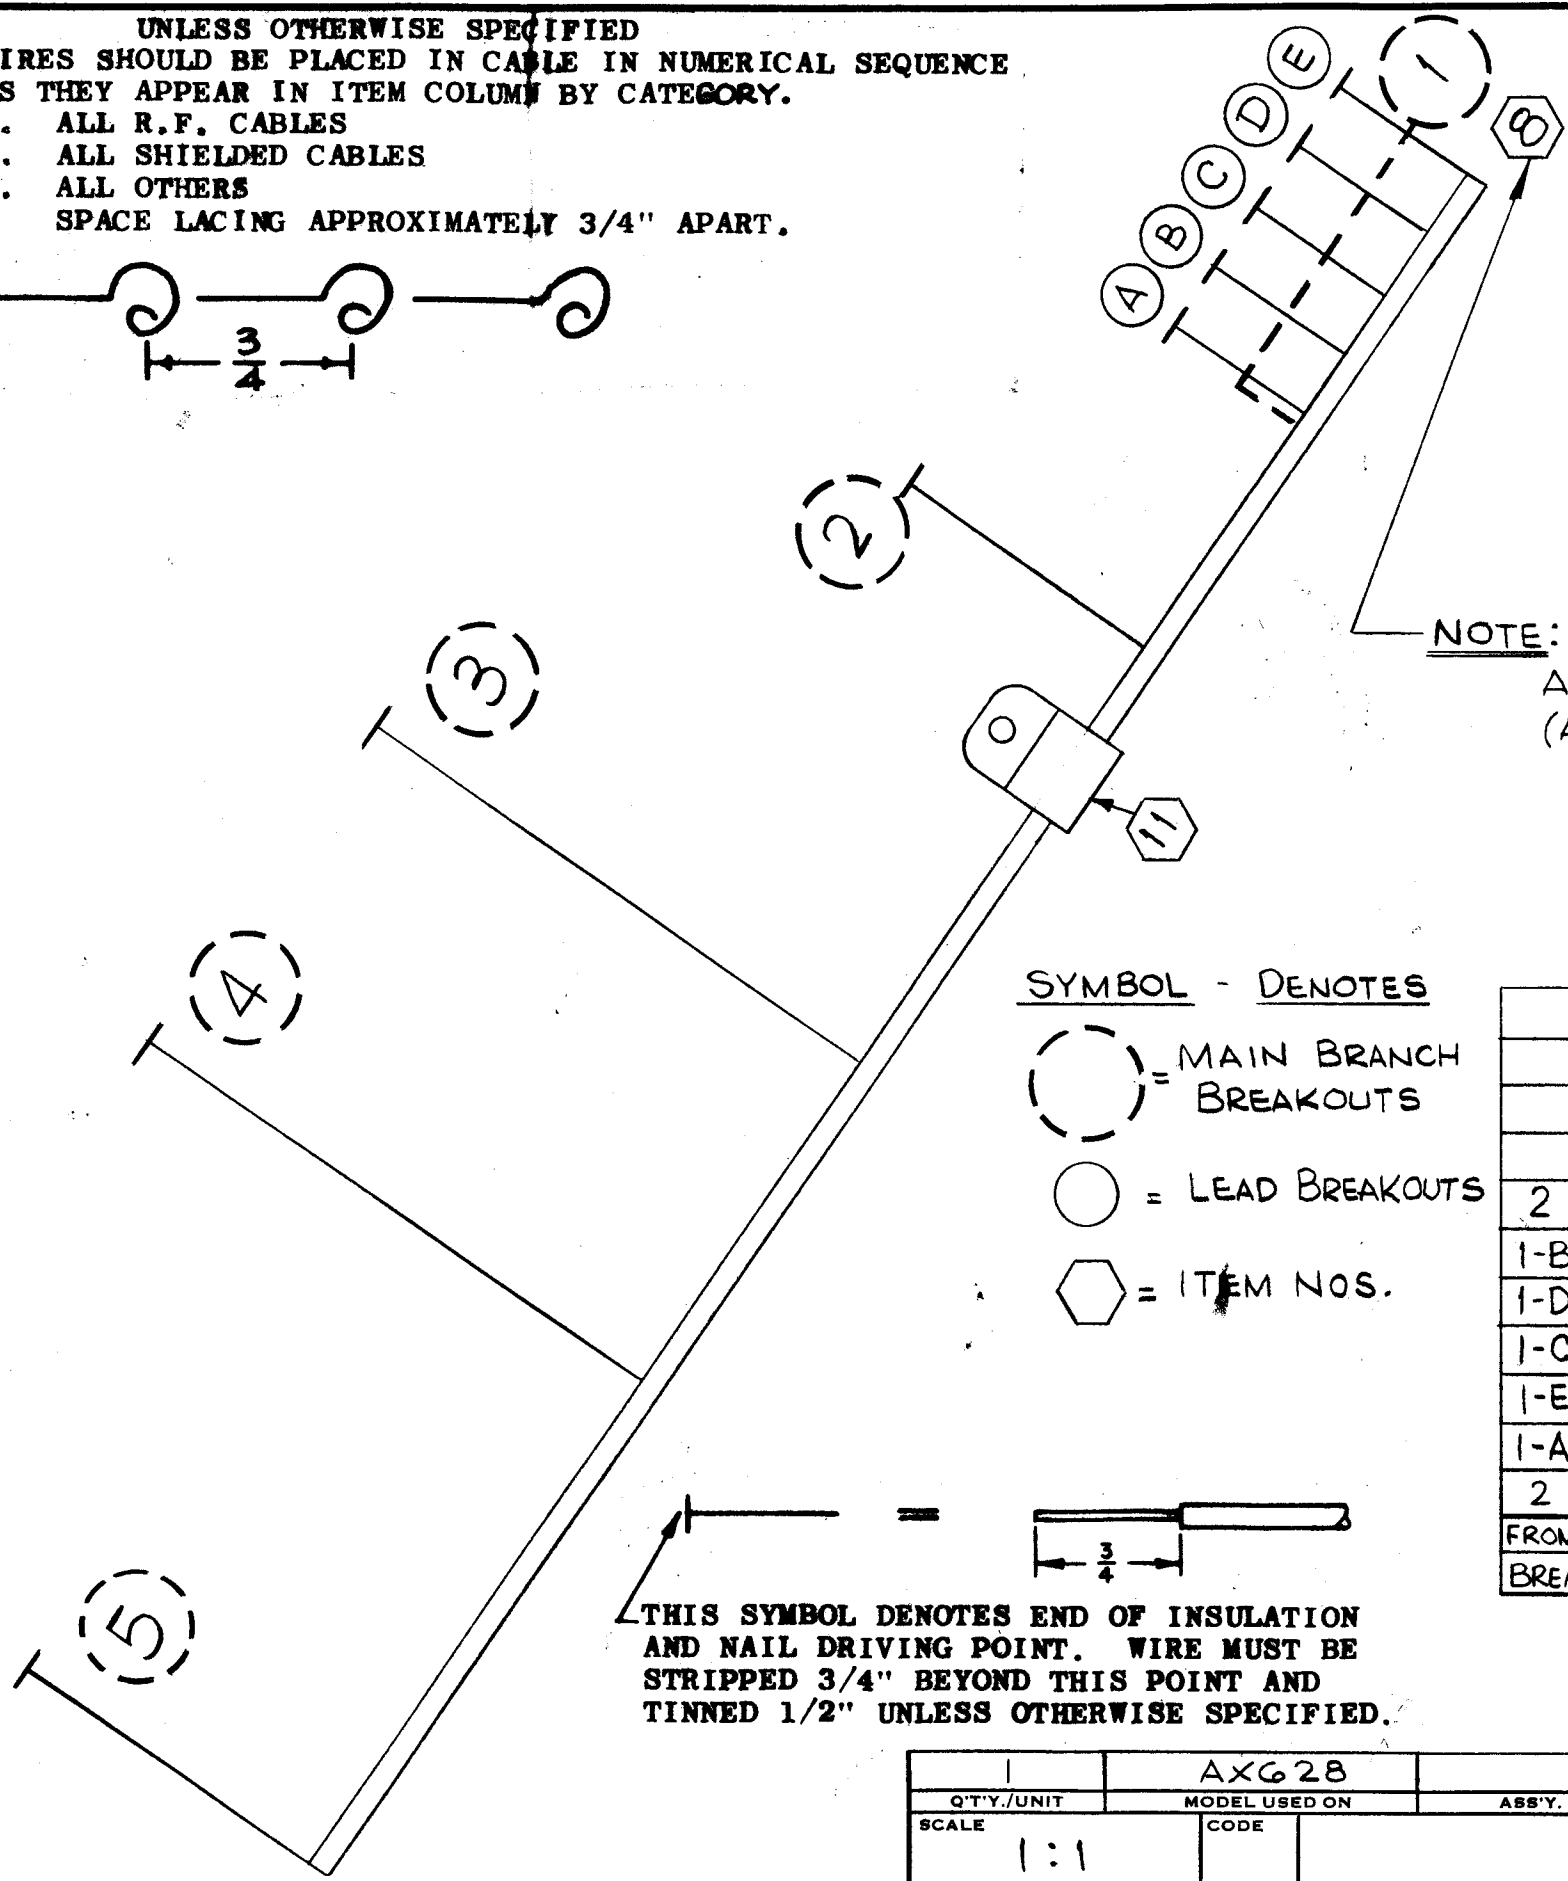


UNLESS OTHERWISE SPECIFIED
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

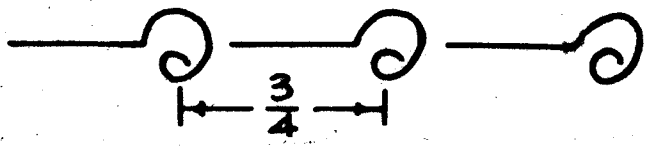

CA1235

NOTE:
 ATTACH ITEM 8 TO ALL LEAD GROUPS
 (A TO E) WITHIN NO. 1 BREAKOUT.

SYMBOL - DENOTES

- (---) = MAIN BRANCH BREAKOUTS
- (○) = LEAD BREAKOUTS
- (⬡) = ITEM NOS.

THIS SYMBOL DENOTES END OF INSULATION
 AND NAIL DRIVING POINT. WIRE MUST BE
 STRIPPED 3/4" BEYOND THIS POINT AND
 TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

FROM	TO	REQ'D.	ITEM	PART NUMBER	FROM	DESCRIPTION	TO	SYMBOL
		1	11	CU102-1		CLAMP, LOOP		
		X	10	BS100		SOLDER, TIN ALLOY		
		X	9	CD101-3MW		CORD, NYLON, LACING		
		5	8	TE120-2		TERM., LUG-SPADE		
2	4		7	MWC 22(7) U9		RI (WIPER)	M1 (+)	
1-B	3		6		90	TBI-2	M1 (-)(COM.)	
1-D	5		5		2	4	SI (B+)	
1-C	5		4		92	3	(FWD)	
1-E	5		3		0	5	(GRD)	
1-A	5		2		91	TBI-1	(RE...)	
2	5		1	MWC 22(7) U90		RI	SI (COM)	

BREAKOUT		EATON		LIST OF MATERIAL	
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH		TITLE WIRING HARNESS, BRANCHED			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN H.AUSTIN	DATE 4-7-66	FINAL APPROVAL <i>[Signature]</i>	DATE 7-19-69
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED	DATE	CA1235	
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES.	DATE	SHEET	
TOLERANCES		MECH. DES.	DATE	REV. LTR.	

AX628		ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	CODE
SCALE 1:1		
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

NOTES