


CA1245

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXP RELEASE	6-29-66	X			
XI	APPLY ITEM 7 NOTE ADDED	2-23-67	XI			
Ø	ORIGINAL RELEASE FOR PRODUCTION	2/23/67	Ø	CV		

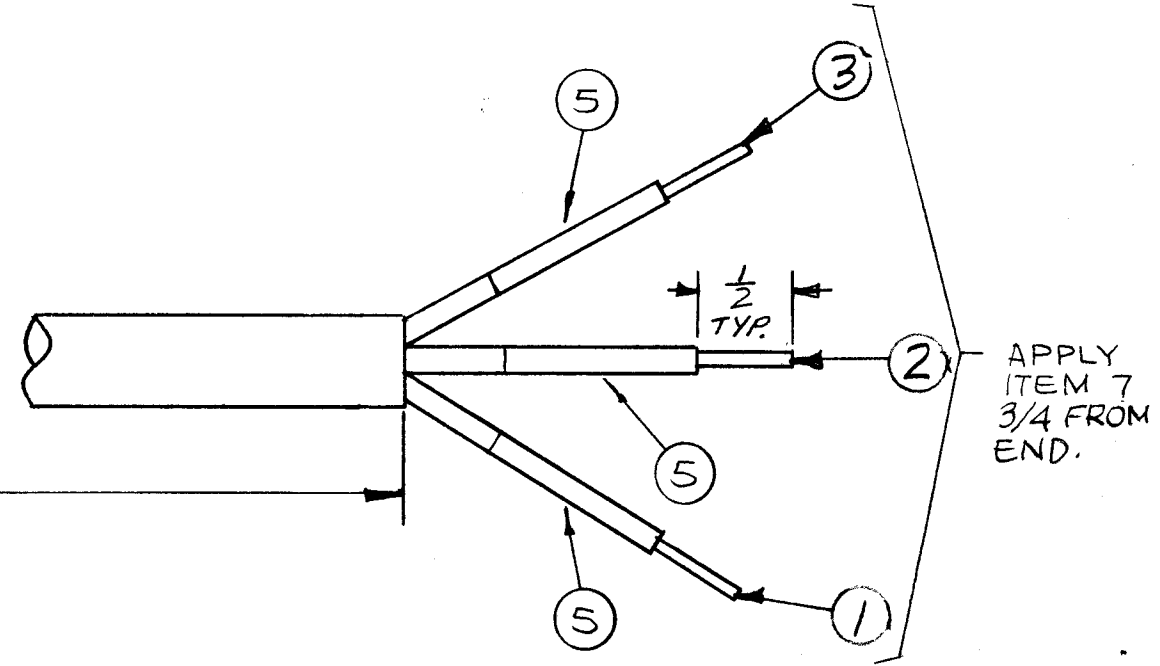

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

SYMBOL - DENOTES

○ = ITEM NO'S

⬡ = LUGS

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	8	CD101-1MW	CORD, NYLON, LACING	
X	7	BS100	SOLDER TIN ALLOY	
3	6	TE141-4	TERM. LUG #1/4-20	
6"	5	PX830-B-1	INS. SLVG. ELECT, SHRINK TYPE	
24"	4	PX100-1-438	INS. SLVG. ELECT.	
	3	HWC10(37)B7	WIRE, ELEC, INS.	
	2	HWC10(37)B8	WIRE, ELEC, INS.	
	1	HWC10(37)B9	WIRE, ELEC, INS.	

F. BUDETTI				LIST OF MATERIAL			
MATERIAL				THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH				TITLE CABLE, H.V. TRANSFORMER			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN BW		DATE 12 JUN 66		FINAL APPROVAL 	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CHECKED		DATE 2/23/67	
TOLERANCES		ELECT. DES. A		DATE		SHEET CA1245	
		MECH. DES.		DATE		REV. LTR. Ø	

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.