


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
XI		STATIONS 13 THRU 20 RELOCATED, BUILD-UP REV.	7-26-66		Jc	
X2		ITEMS 14 - 17 ADDED, ITEMS 41, 57, 58, 60, 62, 62 REVISED	9-6-66		CV	
0		ORIGINAL RELEASE FOR PRODUCTION	9-9-66		Jc	
A		B/TM UPDATED	10-27-66	17133	UHO	
B		CHGD IT 56 BREAKOUT & DESTINATION	12-15-66	17426	RME	

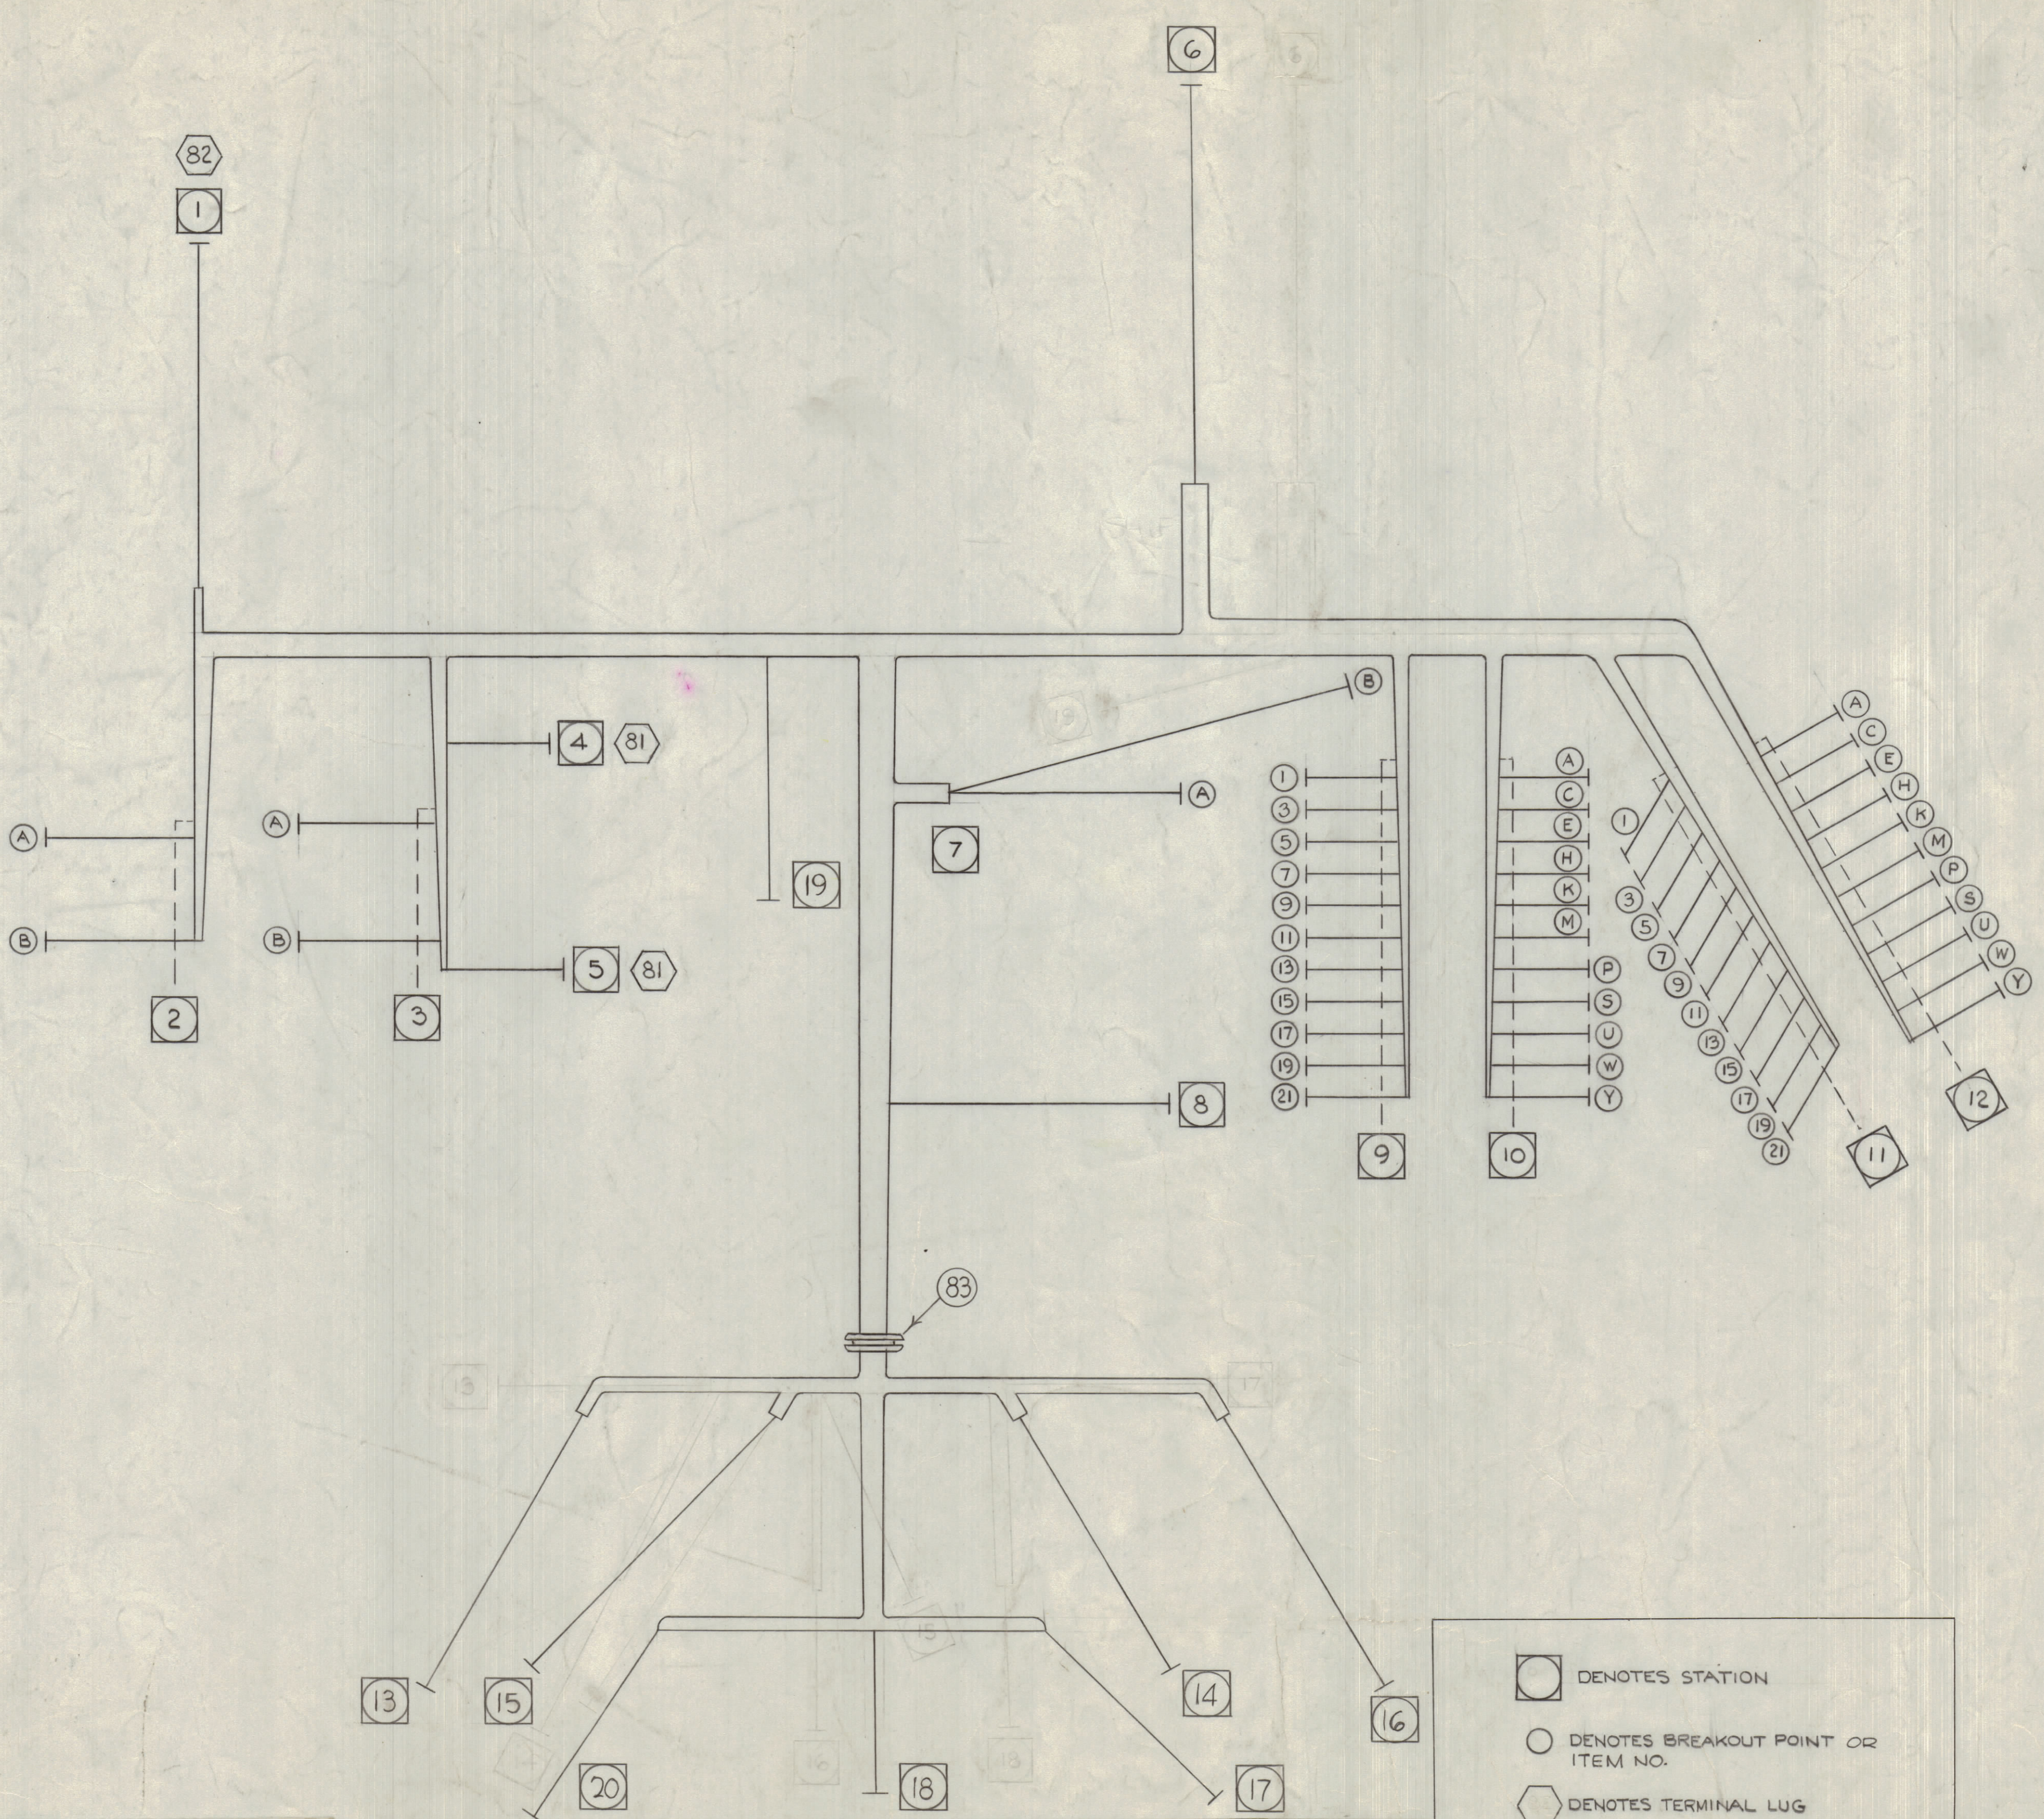

- DENOTES STATION
- DENOTES BREAKOUT POINT OR ITEM NO.
- DENOTES TERMINAL LUG

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

QTY/UNIT	LRCA-I	MODEL USED ON	ASSY. NO.
SCALE	CODE		

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
EATON LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		TITLE HARNES, WIRING, BRANCHED		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE	FINAL APPROVAL
DECIMALS		CHECKED	DATE	DATE
FRACTIONS		ELECT. DES.	DATE	DATE
TOLERANCES		MECH. DES.	DATE	DATE
.X ± .05				
.XX ± .01				
.XXX ± .005				
ANGLES ± 1/64				
± 9° 30'				

CA1247