
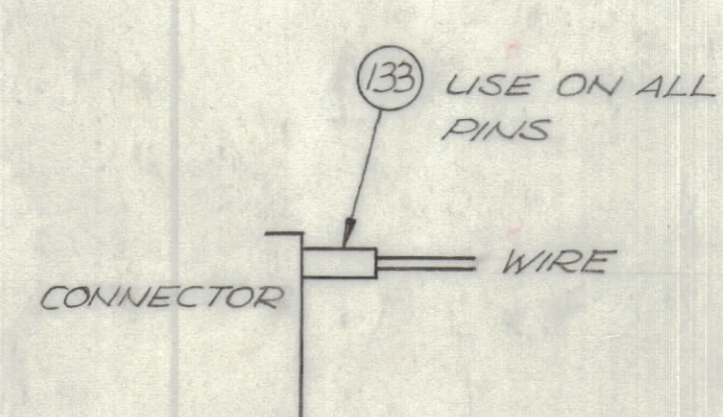
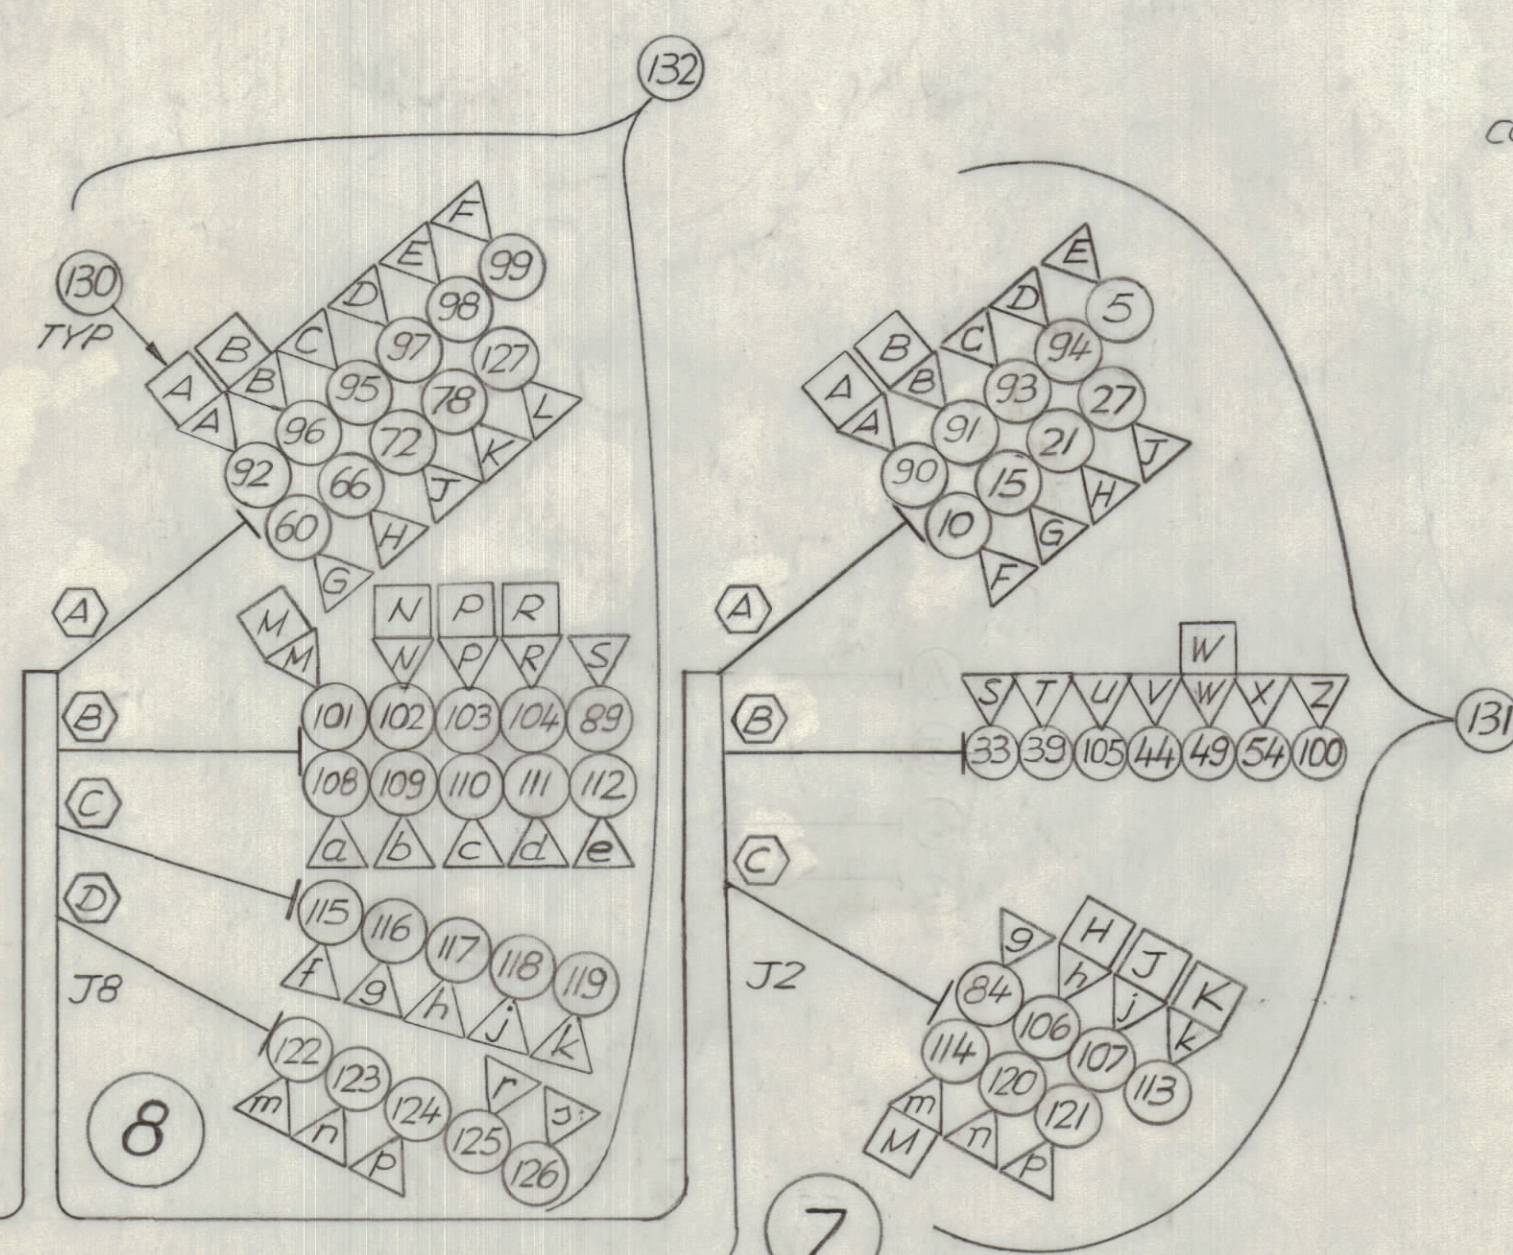


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
X		EXP RELEASE	1-30-65			
XI		REV. & CLARIFIED	12/65			
Ø		ORIGINAL RELEASE FOR PRODUCTION	1-28-67		R.G.	

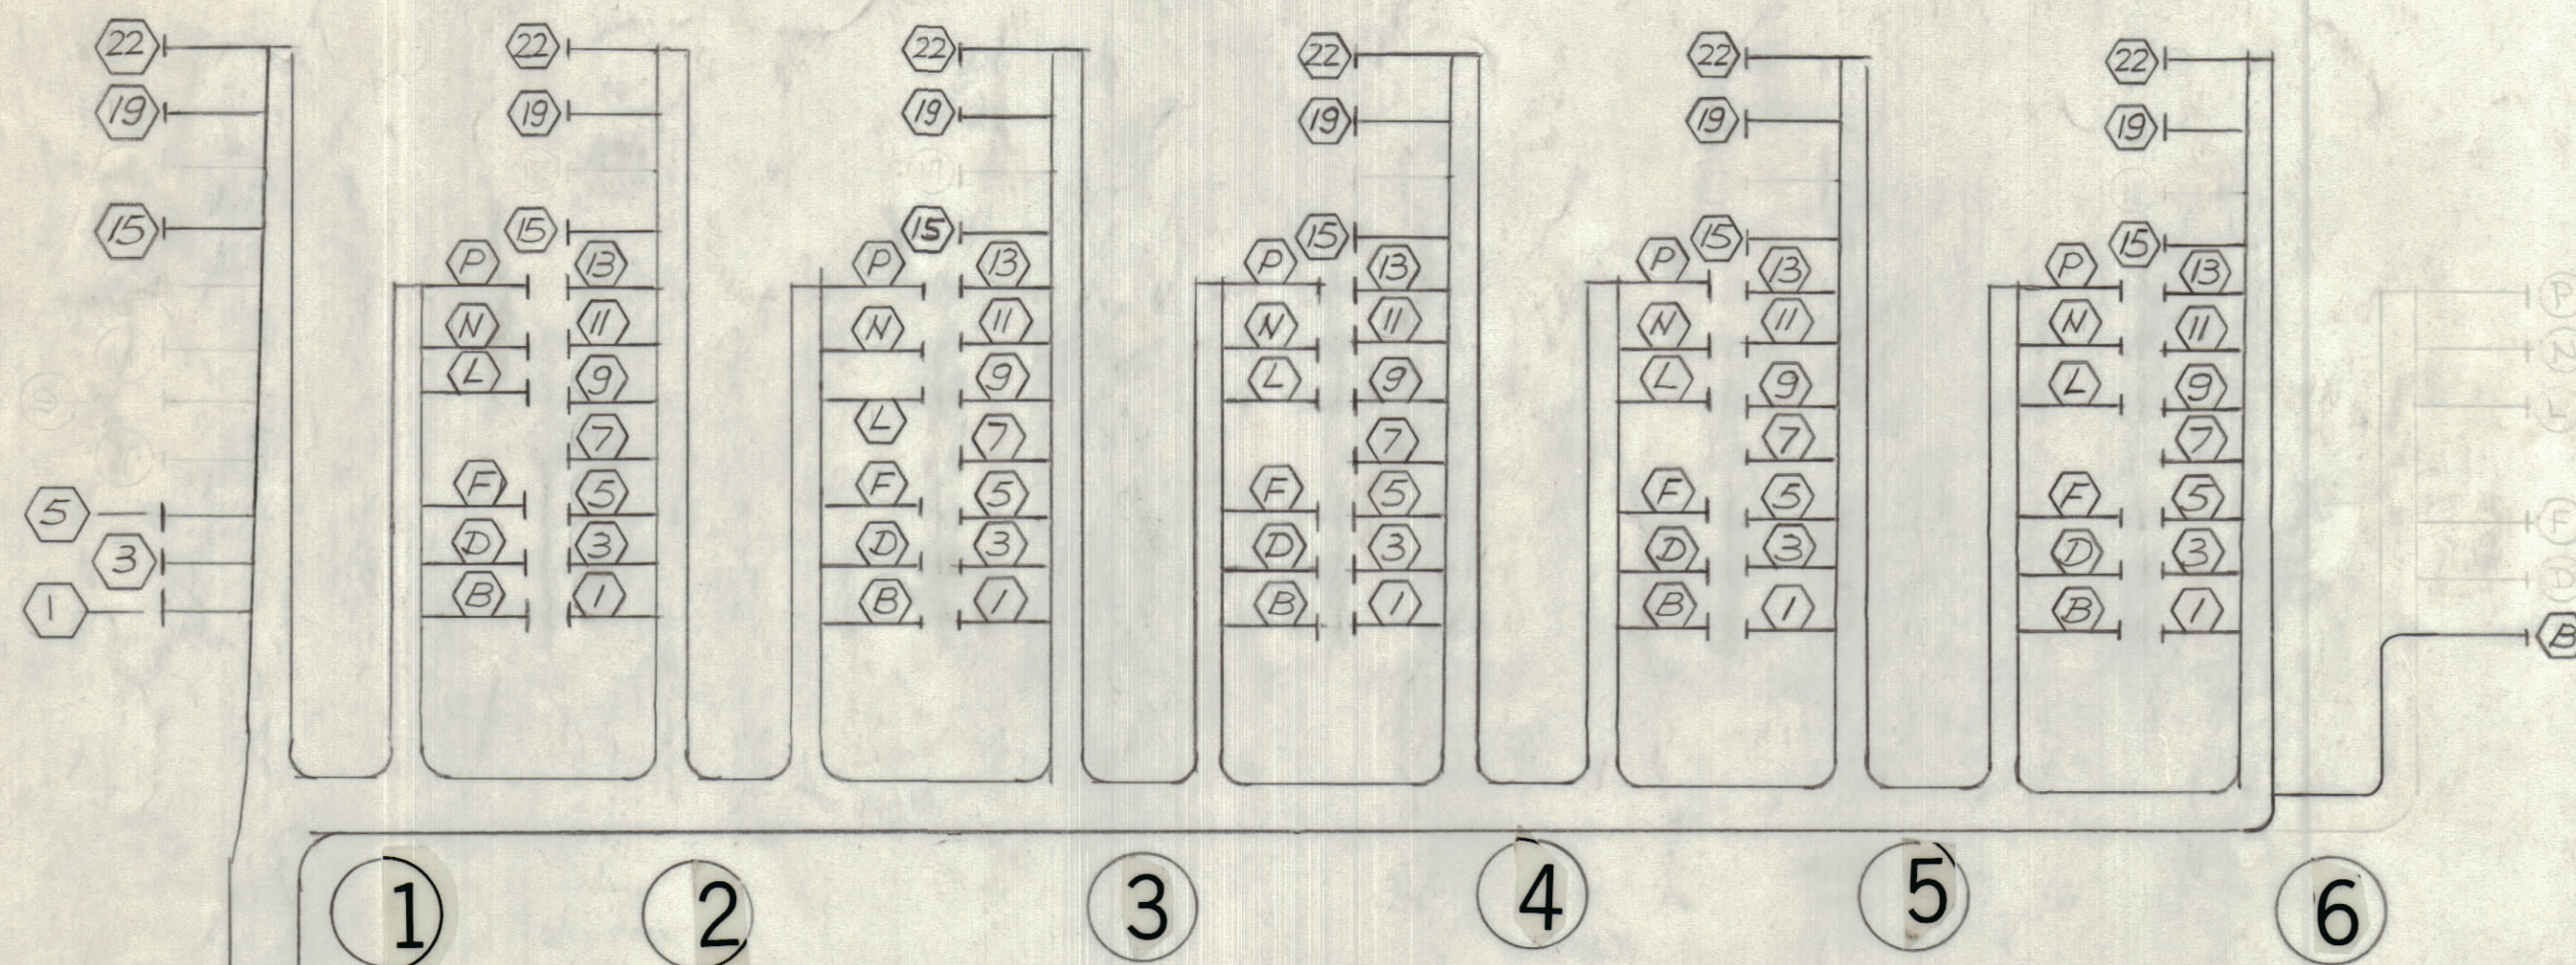

- SYMBOL DENOTES
- ITEM NO'S
 - ⬡ DETAILED BREAKOUT LOCATIONS
 - } STATION BREAKOUTS
 - MARKERS
 - △ PIN NO'S

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

1	HFSR-4	BMA-236
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE	401-451	
NOTICE TO PERSONS RECEIVING THIS DRAWING		
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
FINAL APPROVAL			HOGAN	
MECH. DES.			DATE	
ELECT. DES.			DATE 28 JAN 69	
CHECKED			DATE 1-30-68	
DRAWN			DATE 1-30-68	
MATERIAL			SIZE CODE IDENT. NO. DWG. NO.	
FINISH			D 82679 CA1417	
SCALE 1:1			SHEET OF	

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

WIRING HARNESS, BRANCHED
(AUTOMATION) CABLES

B CA1417 Ø

A