


UNLESS OTHERWISE SPECIFIED:
 WIRES SHOULD BE PLACED IN CABLE IN
 NUMERICAL SEQUENCE AS THEY APPEAR
 IN ITEM COLUMN BY CATEGORY.
 1. ALL R.F. CABLES
 2. ALL SHIELDED CABLES
 3. ALL OTHERS
 SPACE LACING APPROX. 3/4" APART.

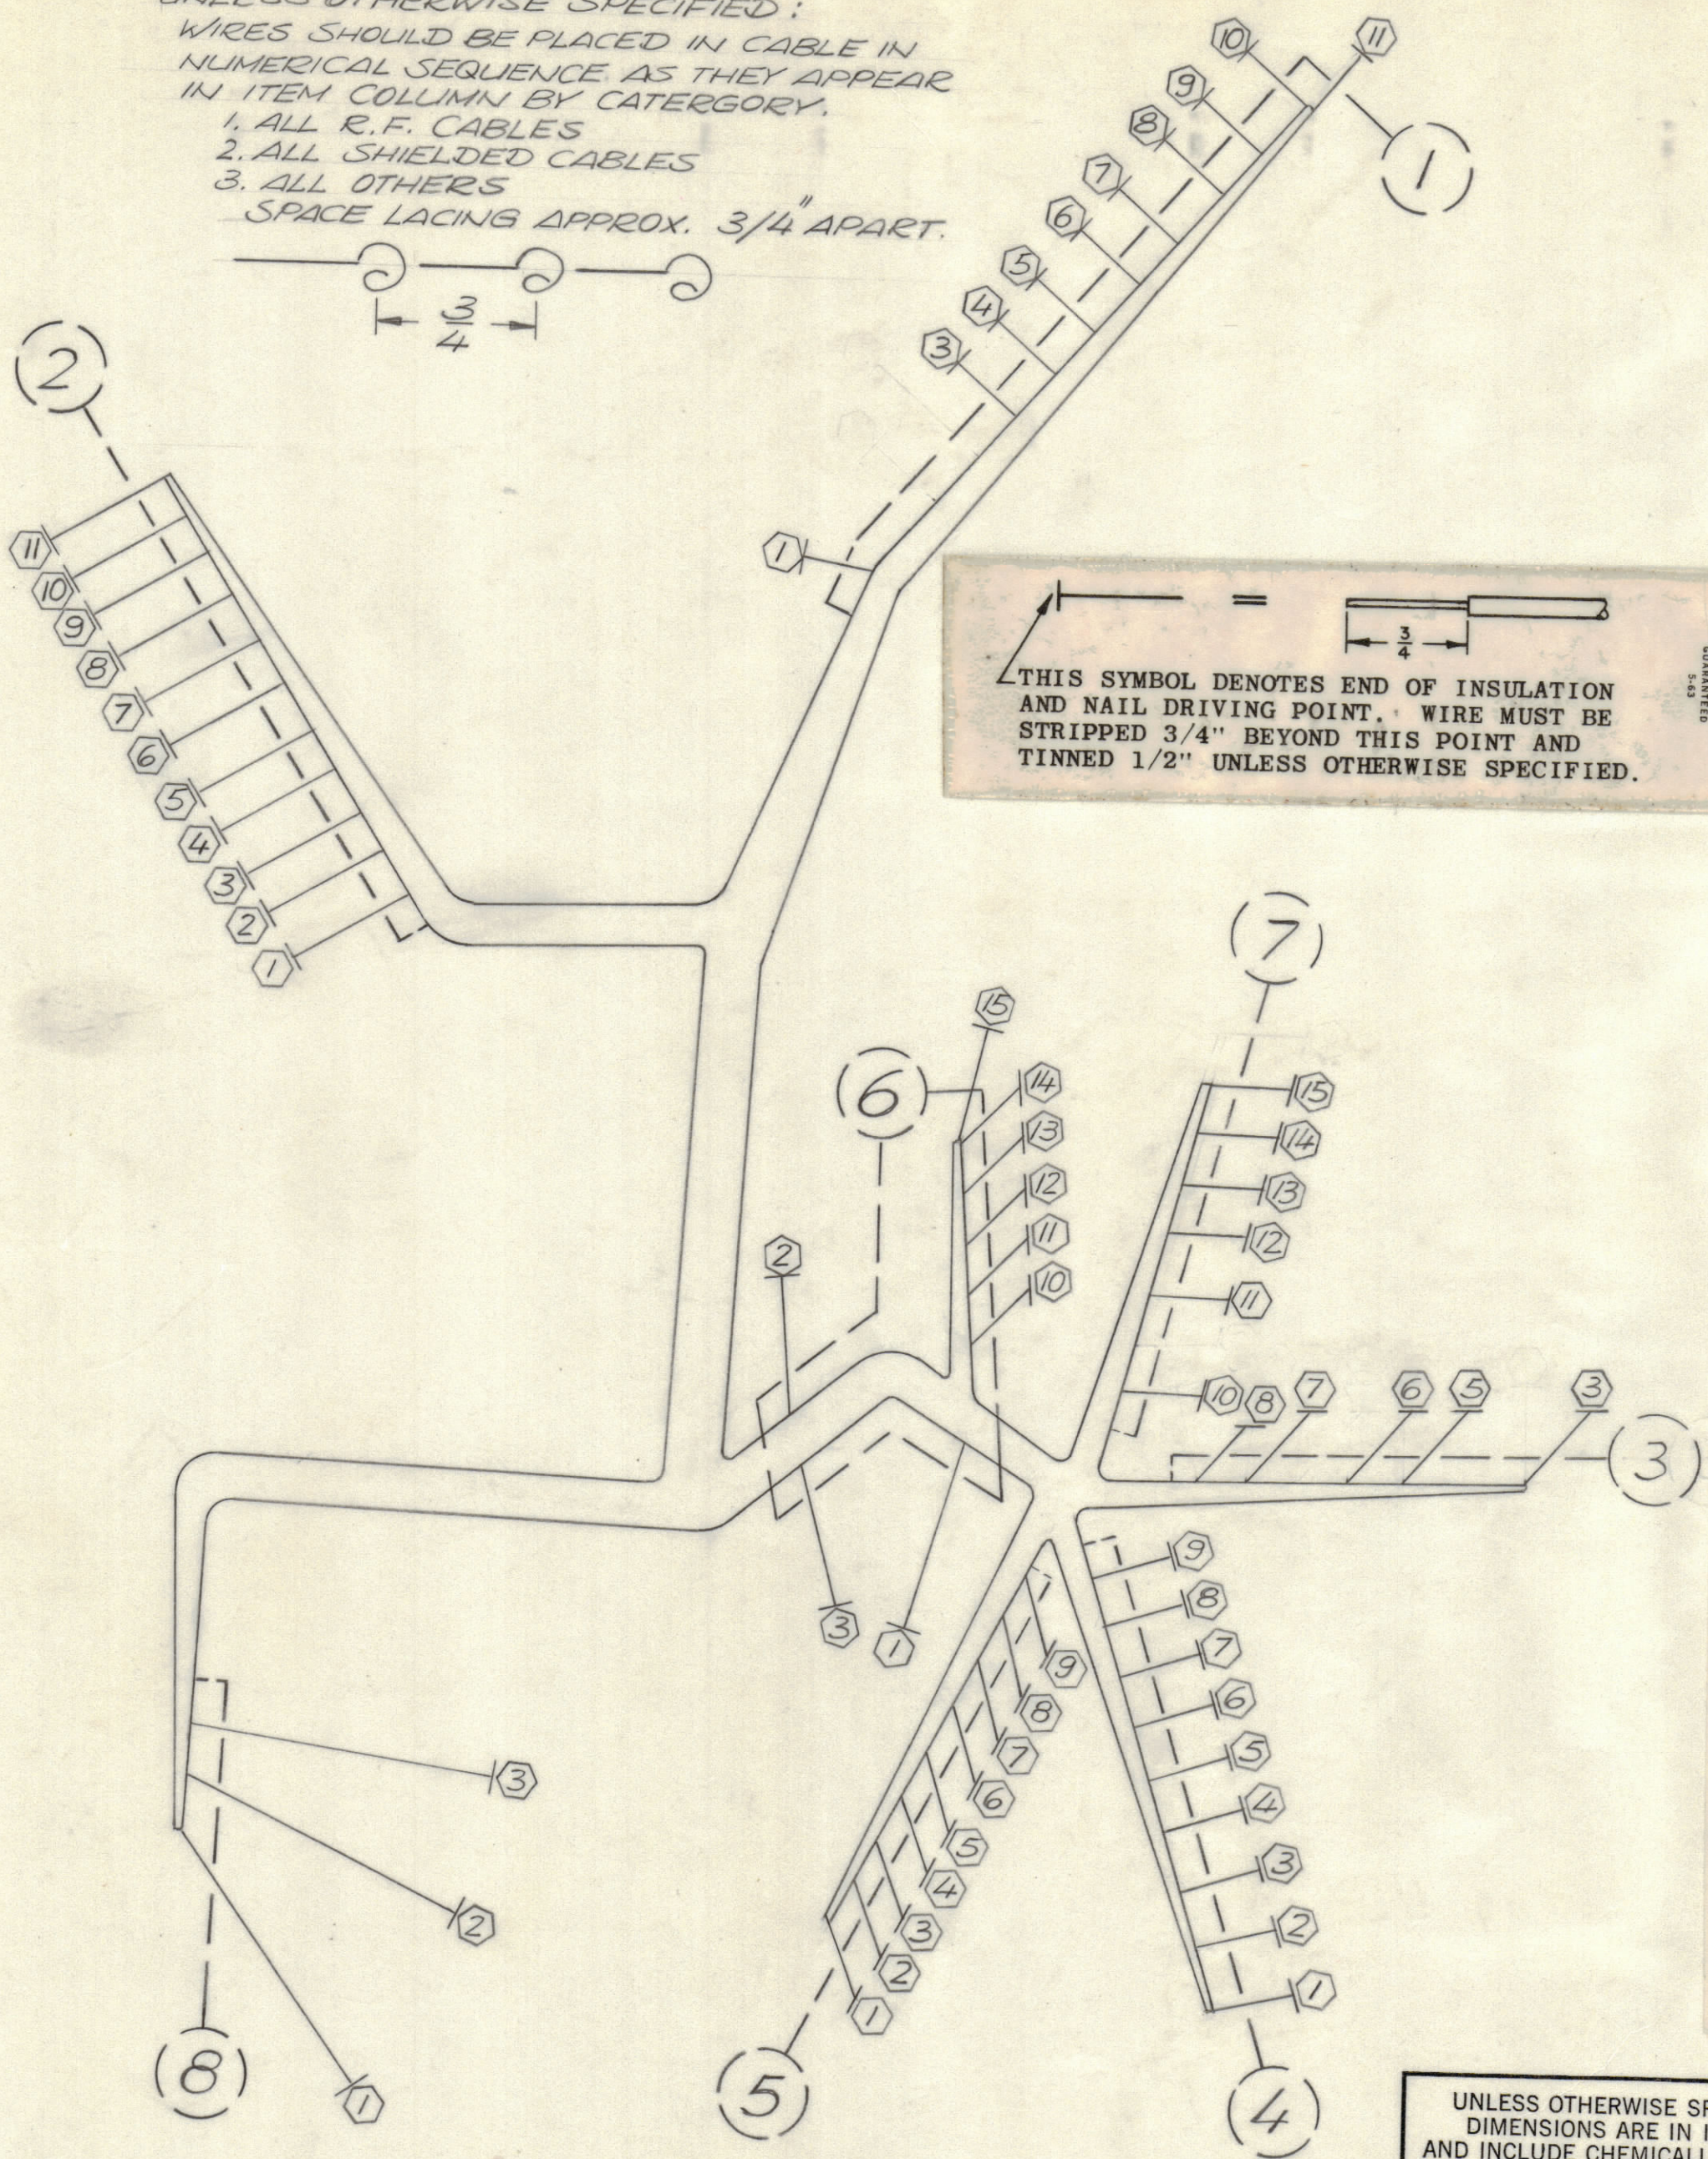

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

SYMBOL DENOTES
 [Hexagon] = DETAILED BREAKOUT LOCATIONS
 [Circle] = BREAKOUTS
 [Dashed line] = [Symbol]

					REVISIONS		
E.M.N.NO	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE	APPROVED
	44			X	EXP. RELEASE	11/24/69	
	1				ORIGINAL RELEASE FOR PRODUCTION	9/17/70	

CA 1528

REQ	ITEM	PART NUMBER	BREAKOUT		DESTINATION OR DESCRIPTION	
			FROM	TO	FROM	TO
1		LWC26 (7) U1	1-1	2-6	S1-A-1 FRONT	A9 TERM 13
2			1-2	2-6	S1-A-2	A9 TERM 15
3			1-3	2-5	S1-A-18	A9 TERM 12
4			1-4	2-5	S1-A-17	A9 TERM 11
5			1-5	2-4	S1-A-16	A9 TERM 10
6			1-6	2-4	S1-A-15	A9 TERM 9
7			1-7	2-3	S1-A-14	A9 TERM 8
8			1-8	2-3	S1-A-13	A9 TERM 7
9		LWC26 (7) U91	1-9	2-1	S1-A-12	A9 TERM 2
10		LWC24 (7) U9	3-3	2-10	S1-A-4	A9 TERM 22
11		LWC24 (7) U9	3-6	2-11	S1-A-6 FRONT	A9 TERM 27
12		LWC26 (7) U92	3-5	2-2	S1-A-5 REAR (COM)	A9 TERM 5
13		93	1-10	2-10	S1-A-11	A9 TERM 20
14		94	1-11	2-10	S1-A-10	A9 TERM 19
15		95	3-7	2-7	S1-A-8	A9 TERM 16
16		96	3-8	2-8	S1-A-9	A9 TERM 17
17		97	1-9	2-11	S1-A-12	A9 TERM 25
18		98	1-8	2-10	S1-A-13	A9 TERM 26
19		1	1-5	2-9	S1-A-16	A9 TERM 24
20		2	4-1	8-1	S1-B-1	J4 PIN m
21		3	4-2	8-1	S1-B-2	J4 PIN p
22		4	4-3	8-1	S1-B-3	J4 PIN r
23		5	4-4	8-1	S1-B-4	J4 PIN s
24		6	4-5	8-1	S1-B-5	J4 PIN t
25		7	4-6	8-1	S1-B-6	J4 PIN u
26		8	4-7	8-1	S1-B-7	J4 PIN v
27		9	4-8	8-1	S1-B-8	J4 PIN k
28		91	4-9	8-1	S1-B-9 REAR	J4 PIN h
29		2	4-6	2-3	S1-B-6 FRONT (COM)	A9 TERM 6
30		1	7-10	8-2	S1-B-10 REAR	J4 PIN m
31		2	7-11	8-2	S1-B-11	J4 PIN f
32		3	7-12	8-2	S1-B-12	J4 PIN e
33		4	7-13	8-2	S1-B-13	J4 PIN c
34		5	7-14	8-2	S1-B-14	J4 PIN d
35		6	7-15	8-2	S1-B-15	J4 PIN j
36		7	5-1	8-3	S1-C-1	J4 PIN v
37		8	5-2	8-3	S1-C-2	J4 PIN w
38		9	5-3	8-3	S1-C-3	J4 PIN X
39		91	5-4	8-3	S1-C-4	J4 PIN Y
40		92	5-4	8-3	S1-C-5	J4 PIN Z
41		93	5-6	8-3	S1-C-6	J4 PIN a
42		94	5-7	8-3	S1-C-7	J4 PIN b
43		95	5-8	8-3	S1-C-8	J4 PIN S
44		96	5-9	8-3	S1-C-9 REAR	J4 PIN P
45		97	5-6	2-10	S1-C-6 FRONT (COM)	A9 TERM 21
46		98	6-10	8-3	S1-C-10 REAR	J4 PIN U
47		1	6-11	8-3	S1-C-11	J4 PIN T
48		2	6-12	8-3	S1-C-12	J4 PIN R
49		3	6-13	8-3	S1-C-13	J4 PIN H
50		LWC26 (7) U4	6-14	8-3	S1-C-14 REAR	J4 PIN J
51		LWC26 (7) U5	6-15	8-3	S1-C-15 REAR	J4 PIN N
52		LWC26 (7) U6	6-1	2-1	S1-D-6 FRONT (COM)	A9 TERM 3

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
CABLE ASS'Y SWITCH CONTROL				
SIZE	CODE	IDENT NO.	DWG NO.	ISSUE
C		82679	CA 1528	Ø
SCALE 1:1		SHEET OF		

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 AND INCLUDE CHEMICALLY APPLIED
 OR PLATED FINISHES

TOLERANCES ON
 DECIMALS .X ± .05
 .XX ± .01
 .XXX ± .005

FRACTIONS ± 1/64
 ANGLES ± 0° -30'

MATERIAL

FINISH

QTY / UNIT	RTTD - 5A	ASS'Y NO.
APPLICATION		
CODE		
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown herein without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		