


ZONE		LTR		REVISIONS			
DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD		
ORIGINAL RELEASE FOR PRODUCTION	5/22/60						

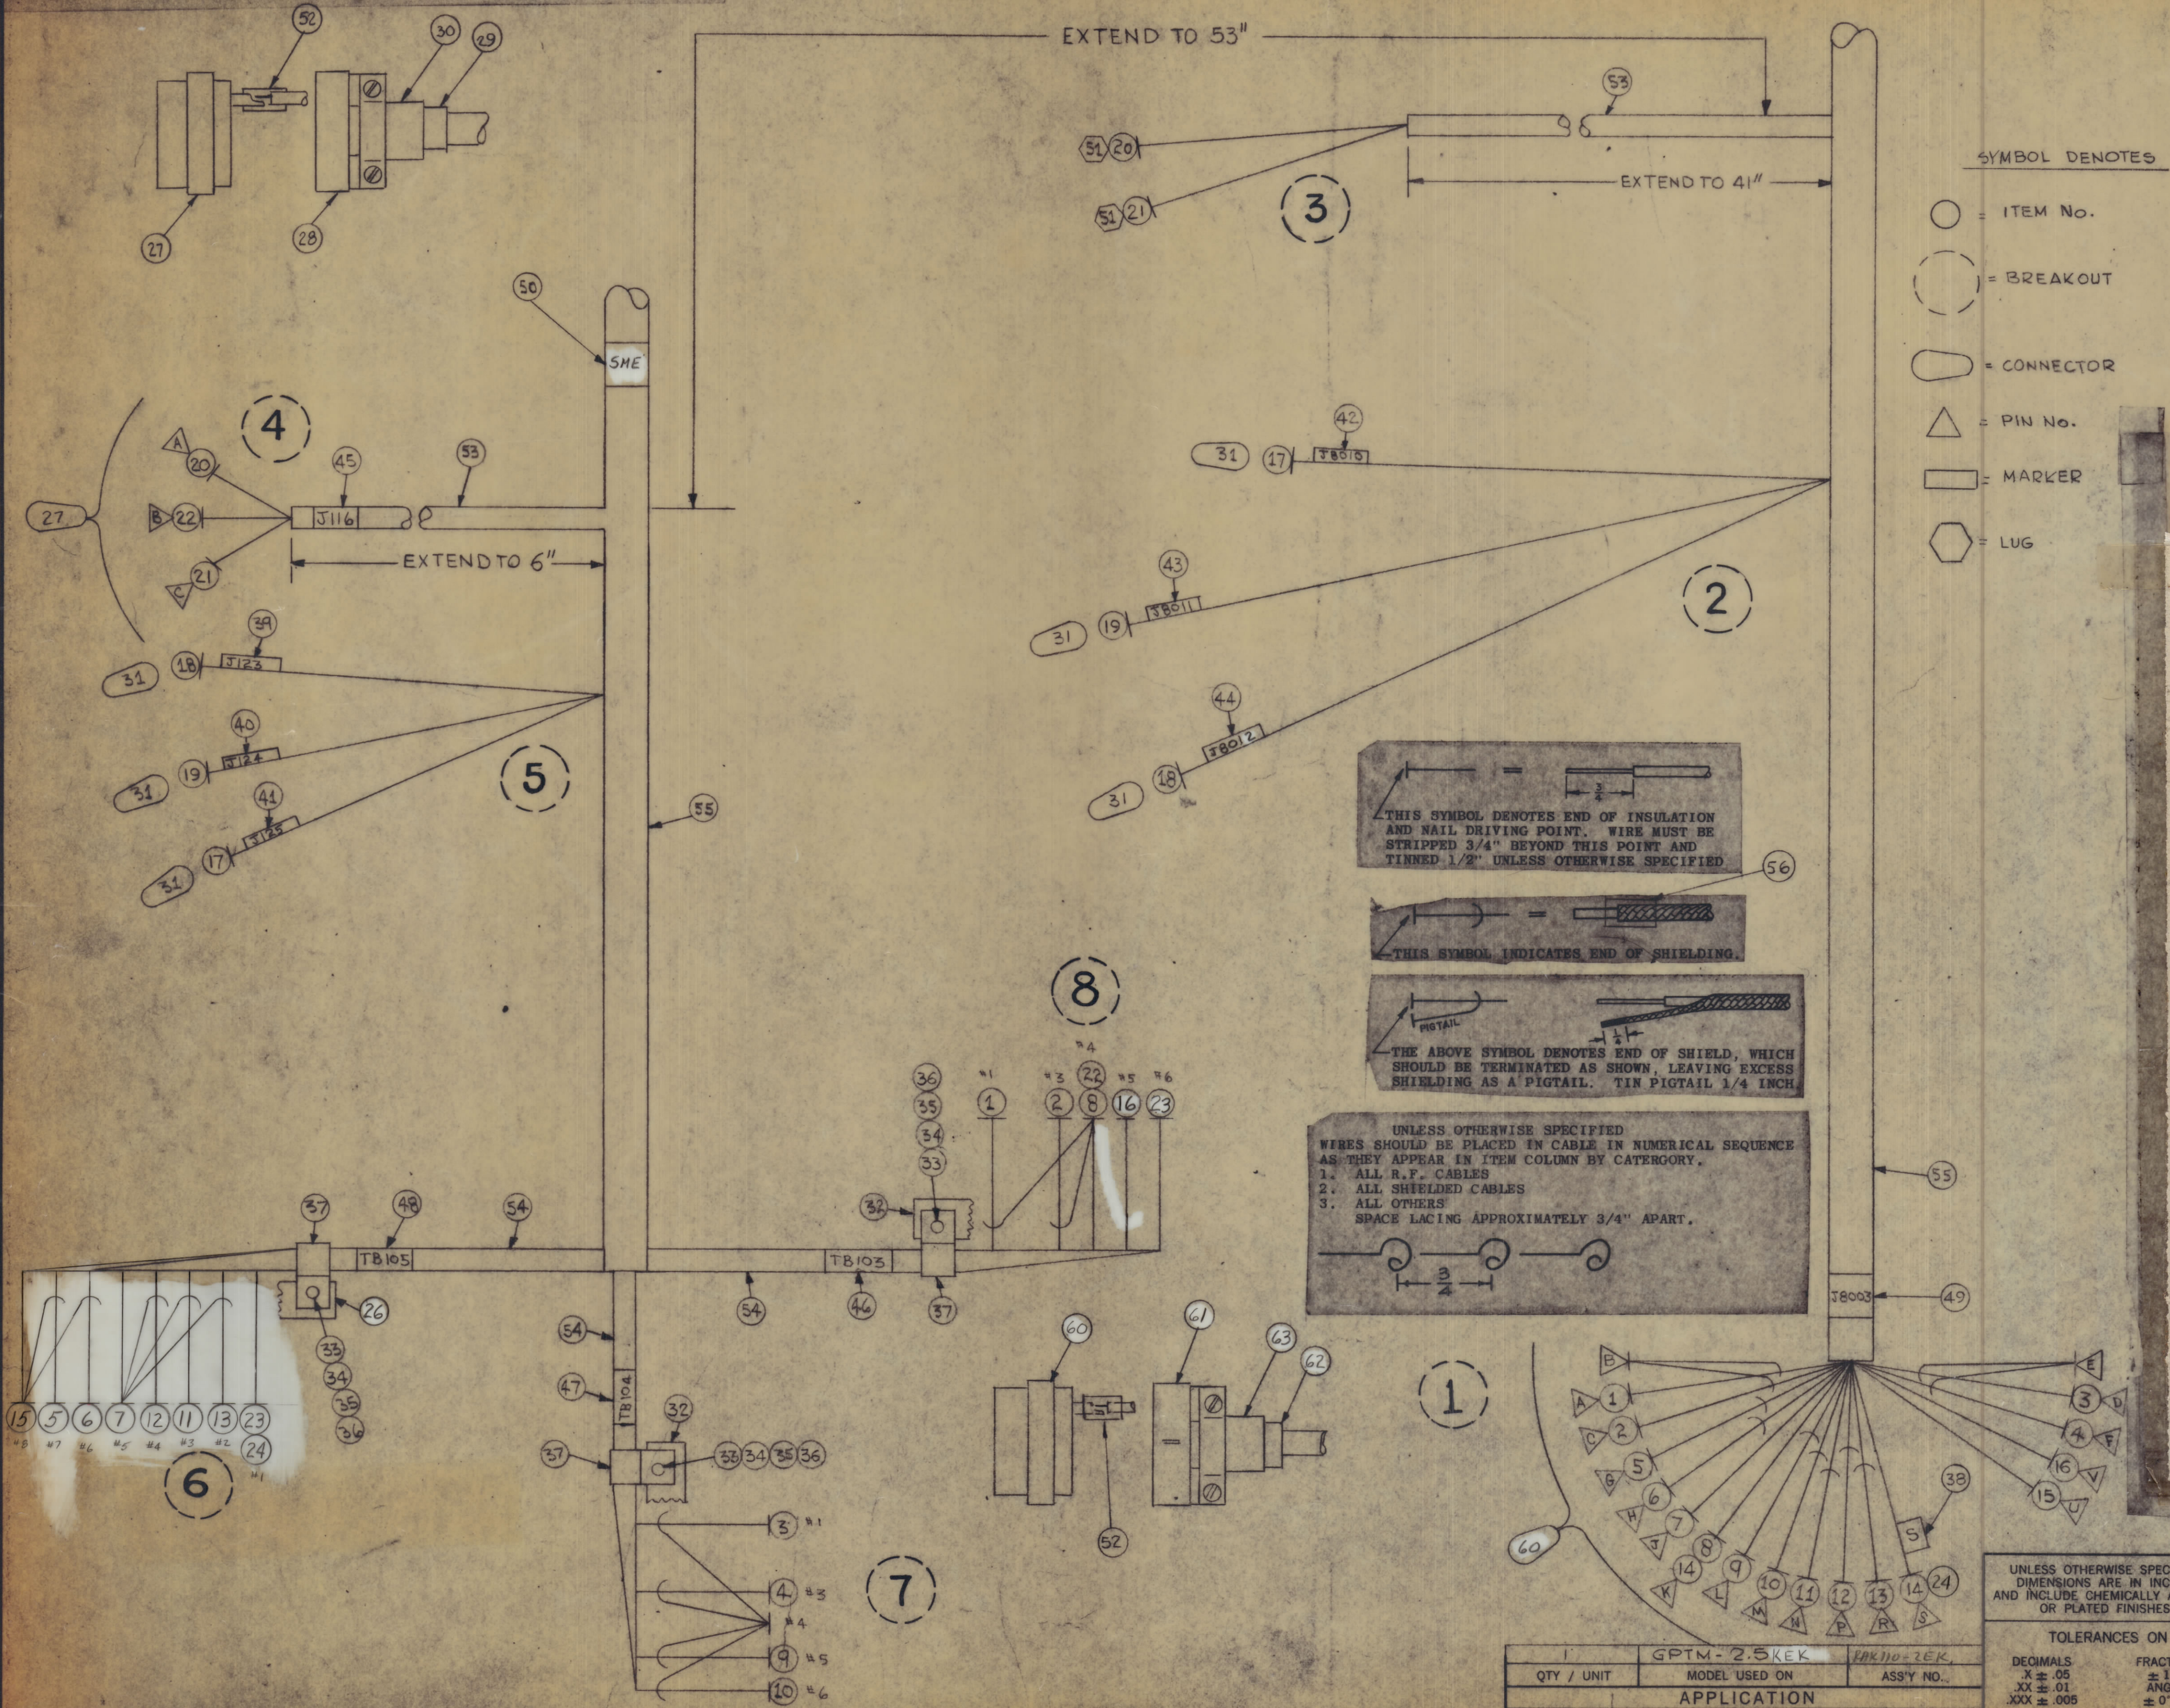

- SYMBOL DENOTES
- = ITEM No.
 - (with dashed line) = BREAKOUT
 - (with horizontal line) = CONNECTOR
 - △ = PIN No.
 - = MARKER
 - ⬡ = LUG

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED

THIS SYMBOL INDICATES END OF SHIELDING

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
F. BUDETTI				
LIST OF MATERIAL				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
CABLE, EXCITER INTERCONNECT				
TOLERANCES ON		DATE		
DECIMALS	FRACTIONS	DATE	DATE	
X ± .05	± 1/64	DATE	DATE	
XX ± .01	ANGLES	DATE	DATE	
XXX ± .005	± 0°-30'	DATE	DATE	
MATERIAL		SIZE	CODE IDENT. NO.	DWG. NO.
FINISH		D	82679	CA1579
SCALE 1:1		SHEET		OF

GPTM-25KEK		MAM110-2EK	
QTY / UNIT	MODEL USED ON	ASSY NO.	
APPLICATION			
CODE A			

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

CA1579