


4

3

2


1

REVISIONS							
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD

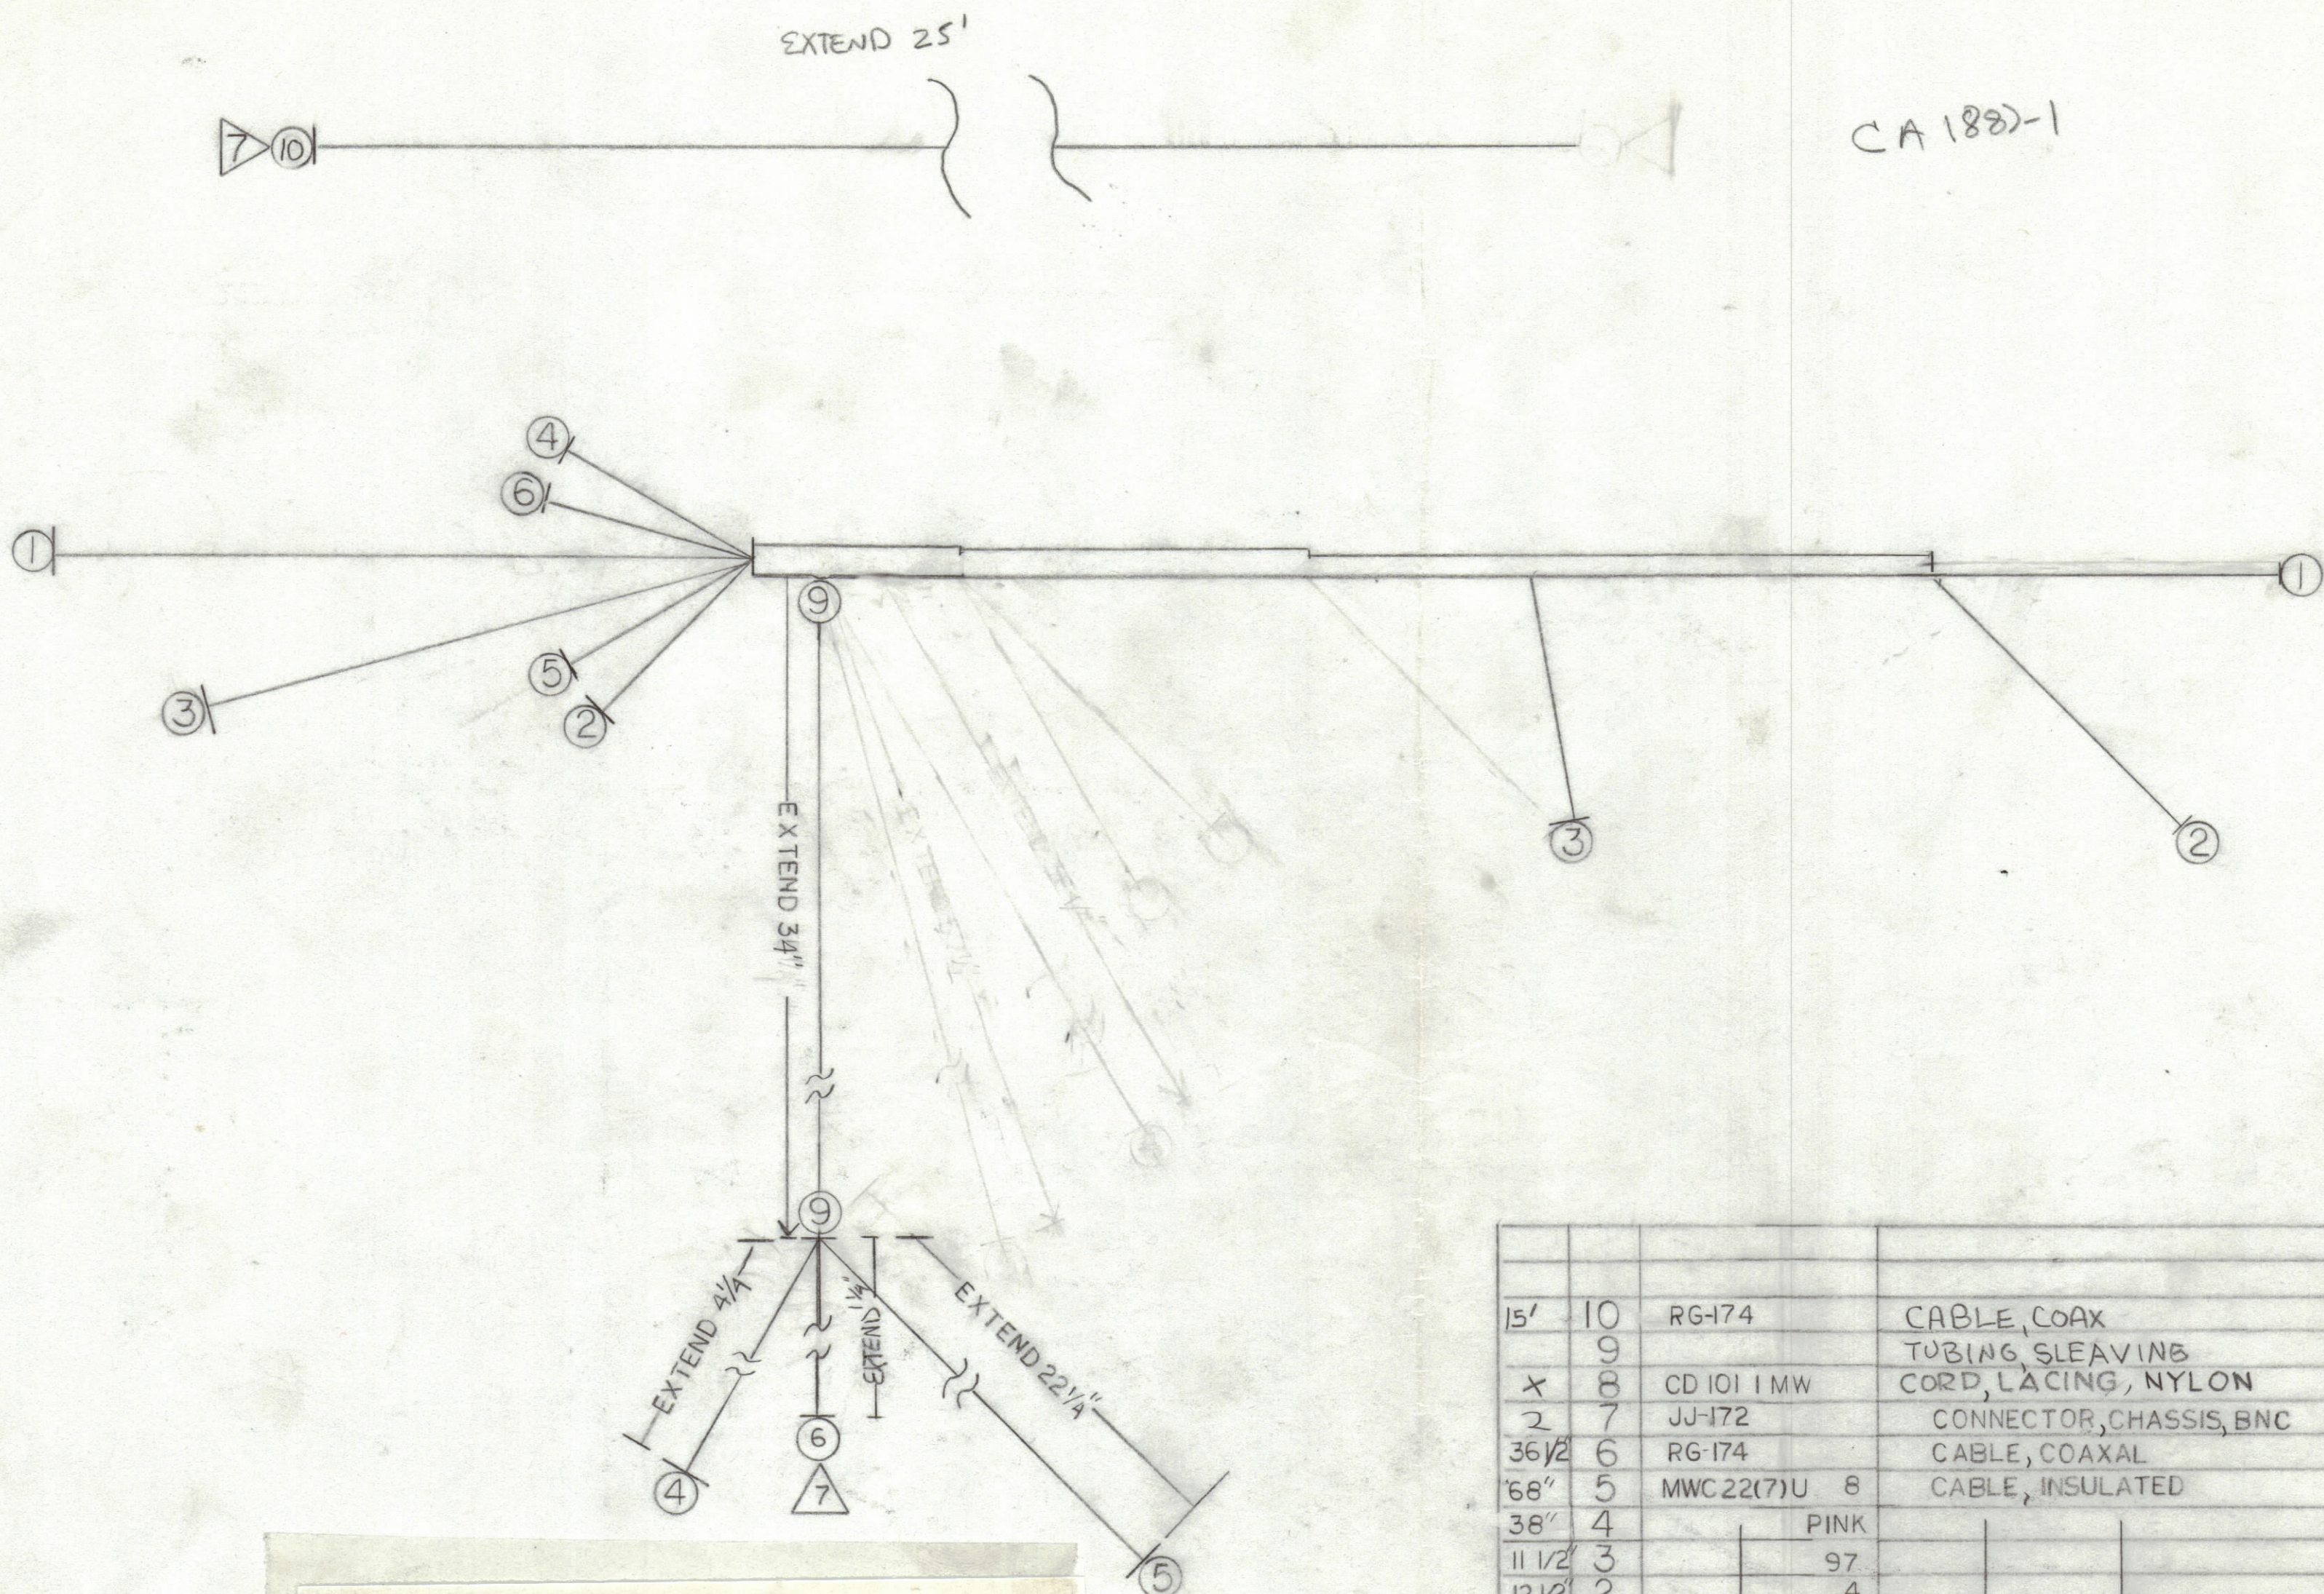

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
15'	10	RG-174	CABLE, COAX	
	9		TUBING, SLEAVING	
X	8	CD 101 1 MW	CORD, LACING, NYLON	BLACK
2	7	JJ-172	CONNECTOR, CHASSIS, BNC	X
36 1/2	6	RG-174	CABLE, COAXIAL	BLACK
68"	5	MWC22(7)U	CABLE, INSULATED	GRAY
38"	4		PINK	PINK
11 1/2	3		97	WH/VIO
12 1/2	2		4	YELLOW
16"	1		7	VIOLET

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.
1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS
SPACE LACING APPROXIMATELY 3/4" APART.

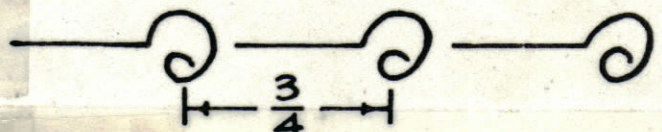

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
AND INCLUDE CHEMICALLY APPLIED
OR PLATED FINISHES

TOLERANCES ON	
DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° -30'

FINAL APPROVAL	DATE
MECH. DES.	DATE
ELECT. DES.	DATE
CHECKED	DATE
DRAWN <i>RAW</i>	DATE 1-4-84

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CABLE HARNESS
KIT 453

QTY / UNIT	MODEL USED ON	ASS'Y NO.
	APPLICATION	KIT 453
	CODE	

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED

4

3

2

1