


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.  
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence and engineering information only and may not be reproduced or used to manufacture any thing without the written permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
 THE TECHNICAL MATERIEL CORPORATION  
 MAMARONECK, NEW YORK

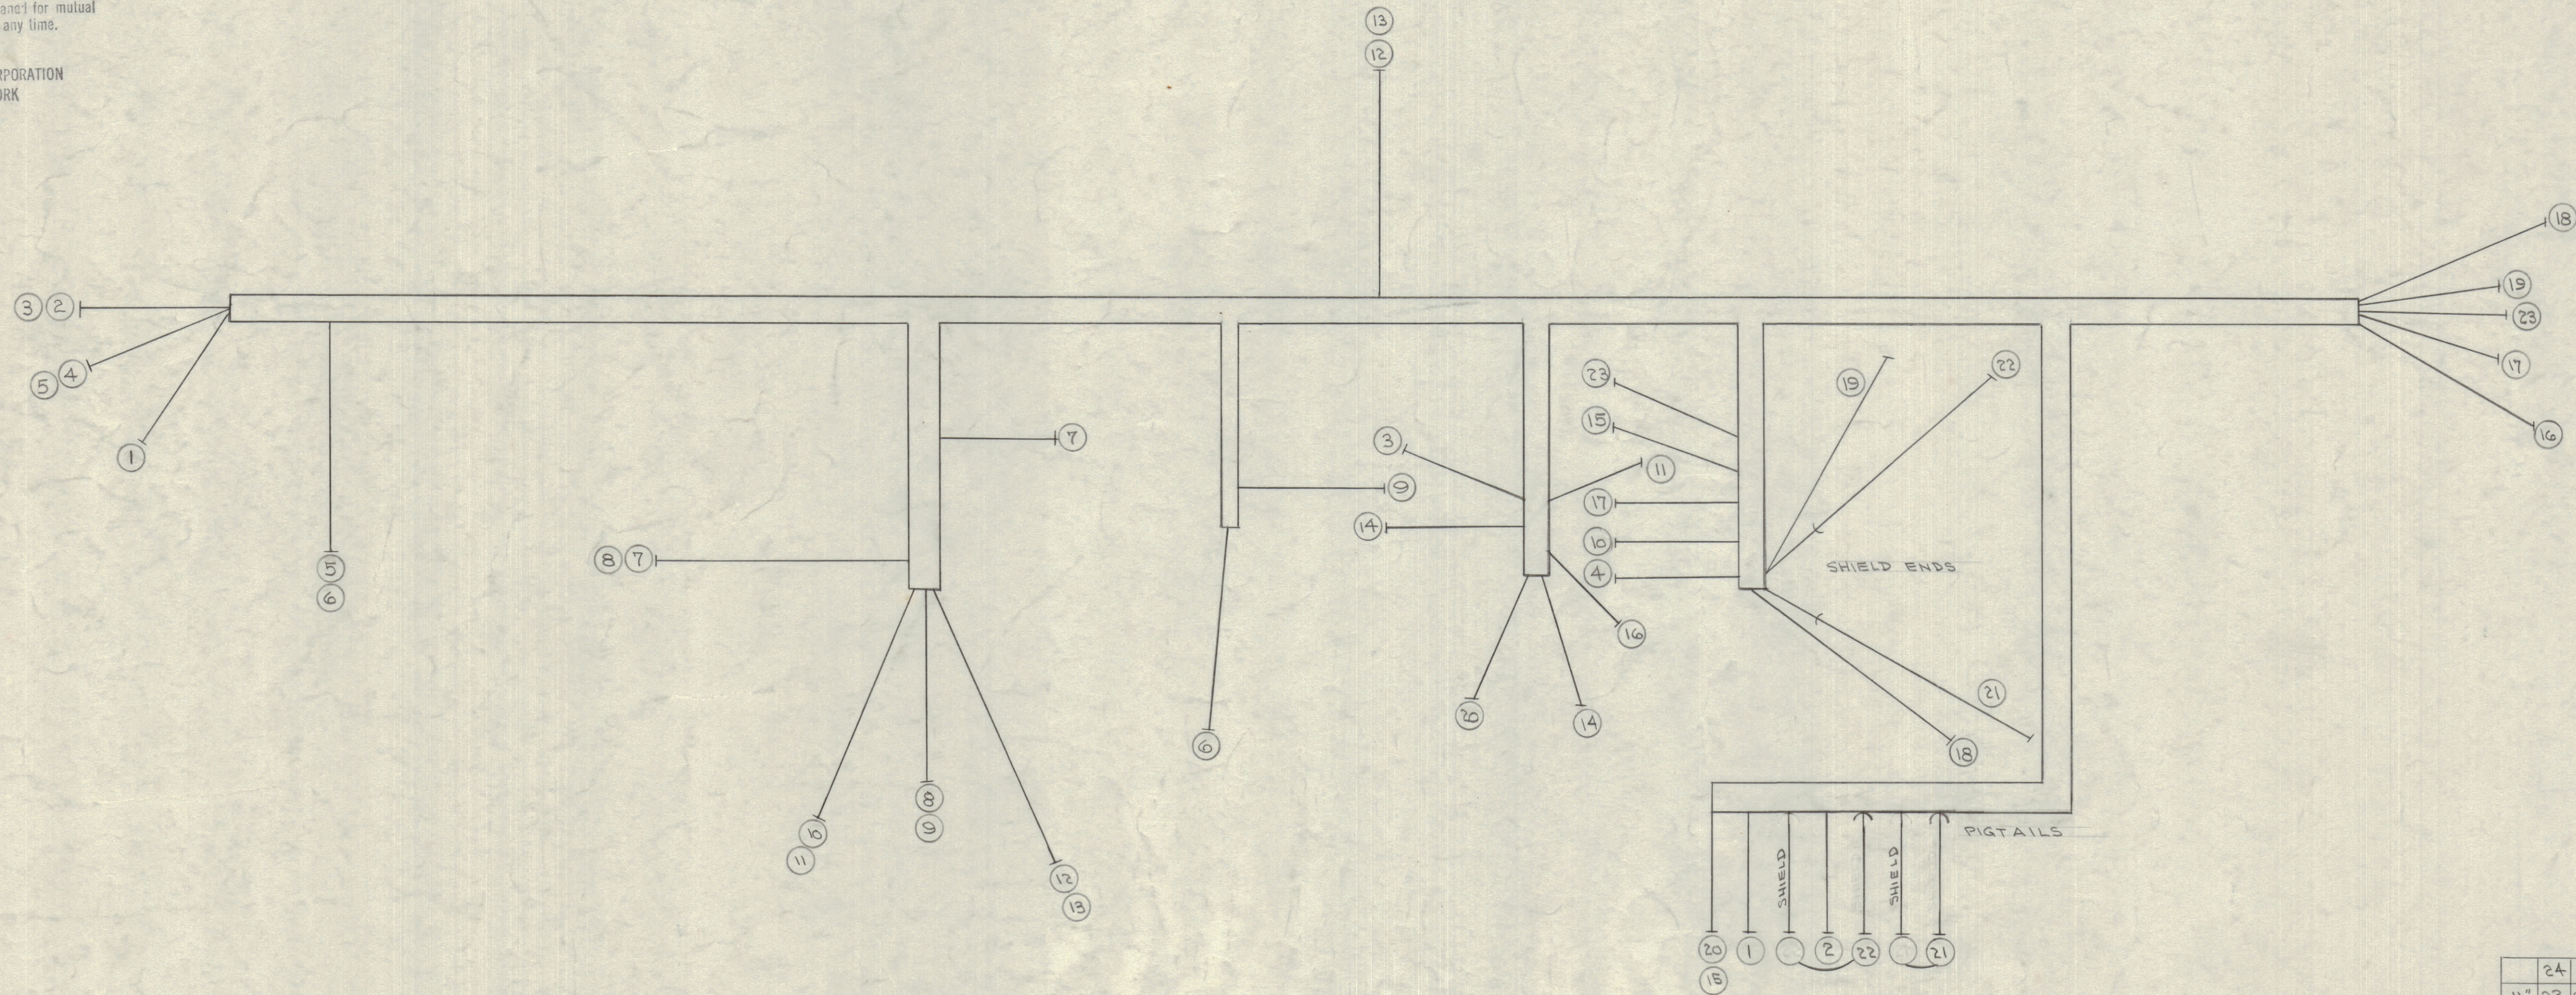

BOTTOM OF CABLE  
 WIRE LENGTHS SHOWN ALLOW 1/2 INCH EACH  
 END FOR STRIPPING

CA-208  
 A

24	CD-100-1	CORD LACING, NYLON	
11"	23 SRIR <sup>3</sup> /s(t)2200	CABLE, INSULATED (BLK.)	
18 1/4"	22 WI-101-A	CABLE, SHIELD FLEX (WH.)	
17 1/4"	21 WI-101-A	" " " (WH.)	
19"	20 SRIR <sup>3</sup> /s(t)220 11	CABLE, INSULATED (BRN.)	
18 1/4"	19	55	(GRN.)
14"	18	55	(GRN.)
11 1/4"	17	44	(YEL.)
14 1/4"	16	44	(YEL.)
16"	15	11	(BRN.)
4 1/4"	14	77	(VIO.)
13 1/2"	13	88	(GRAY)
13 3/4"	12	88	(GRAY)
15"	11	66	(BLUE)
17 1/2"	10	66	(BLUE)
11 3/4"	9	22	(RED)
6"	8	22	(RED)
6 1/4"	7	00	(BLK.)
16 1/4"	6	11	(BRN.)
6"	5	11	(BRN.)
2 1/4"	A	11	(BRN.)
18 1/2"	3	22	(RED)
29 1/4"	2	22	(RED)
29 1/4"	1	TAN	(TAN)

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
#		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
#		CABLE ASSEMBLY.	
#		L. S. P.	
#		CDD-1-22-54	
#		HEAT TREAT. SPEC.	
#		FINISH & SPEC. NO.	

2	ITEM 3, 10, 11, 12, 16, 18 LENGTHS	3/4/55	1	P.D.	W.P.	W.P.	
1	ITEM 2 L&D WIRE LENGTHS						
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES							
SCALE:							
ALL	DEC. DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK					
OTHERS	FRAC. DIM. ±	SIZES AND MANUFACTURERS					
	ANGULAR DIM. ±	TOLERANCES ARE NOT INCLUDED.					

1	LSP			1-22-54
MODEL	PROJECT NO.	ASS'Y. NO.	DATE	
USED ON				