


REQ. PER UNIT	E-500-P	USED ON	D
1EA	MODEL A 959	ASSY. NO.	CA-288
1EA	CAB-7	DATE	4-20-56
1EA			12-15-58

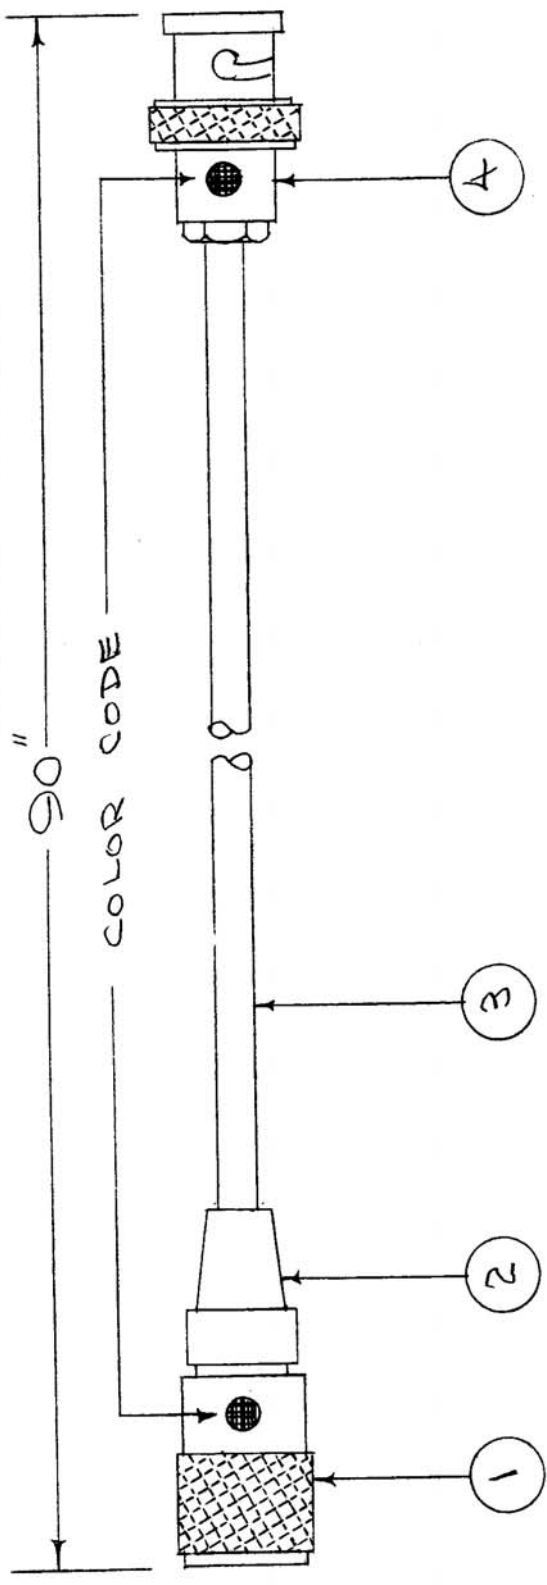

TMC NO.	COLOR CODE	FOR GPT-750(1) USE ON COMB.	FOR GPT-750(1)-2 USE ON COMB.
CA-288-1	RED	C	A, B, C, D
CA-288-2	BLUE	C & D	A, B, C, D
CA-288-3	YELLOW	D	NONE

D	IT.1 WAS PL-259A-MICA	12-21-66	17533	RME	<i>[Signature]</i>	ENG. APP.
C	CHART CHANGED TO IN-CLUDE CAB-7	12/15/58		MB	<i>[Signature]</i>	ENG. APP.
B	COLOR CODE CHART ADDED	8/27/58	438	MB	<i>[Signature]</i>	ENG. APP.
A	PL-259-MICA WAS PL-259	9/25/57	1	MB	<i>[Signature]</i>	ENG. APP.

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 5	BS-100	SOLDER, SOFT	
1	UG-260/U	PLUG	
X 3	RG-59/U	CABLE, COAXIAL	
1	UG-176/U	ADAPTER	
1	PL-259A-TEF	CONNECTOR	

THE TECHNICAL MATERIEL CORP.	
MAMARONECK, NEW YORK	
CABLE ASS'Y, RF	
CDD 4/20/56	<i>[Signature]</i>
DRAWN	DESIGNED
23	<i>[Signature]</i>
ELEC. DES. APP. TECH. DES. APP.	CA-288

TOLERANCES

DEC. DIM. ±

FRAC. DIM. ±

ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES