


CA-319 A

USED ON  
ASSY. NO. DATE  
10-31-56

REQ. PER UNIT  
VE RTP-RTP-2

TMC NO.	"A"	COLOR	PART NO.	FROM	TO
CA-319 - 1	6 3/8"	BLK/WHITE	SR1R6(19)12U90	V606 PIN F	T603 PIN T
- 2	5 1/4"	WHITE	99		T603 PIN S
- 3	4 1/4"	WHITE	99		V607 PIN F

CRIMP AND SOLDER

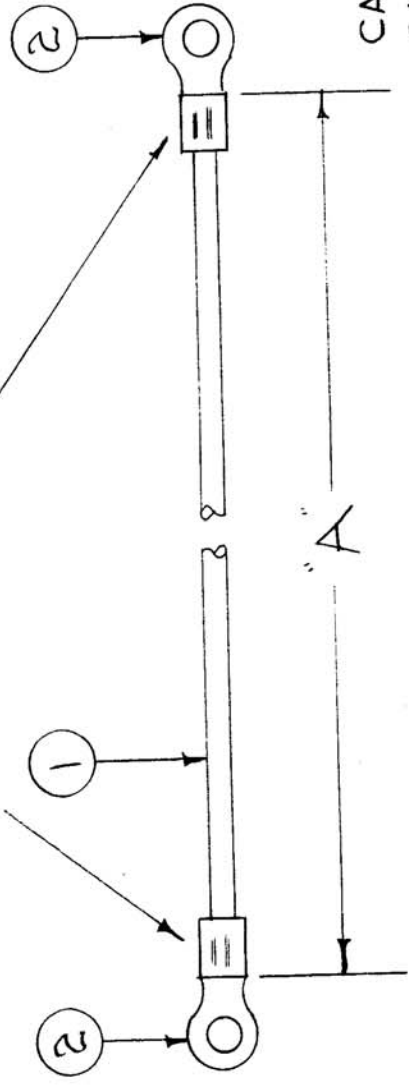

"A" LENGTH ALLOWS 3/8" EACH  
END FOR STRIPPING.

**SUPERSEDED**

**DIRECTLY REPLACED BY.**

CA-319-1 } REPLACED BY CA-405  
 CA-319-2 }  
 CA-319-3 REPLACED BY CA-404-2  
 7-10-63 EMN 9507

REQ. ITEM	DESCRIPTION	SYMBOL
X 3	BS-100 SOLDER, SOFT	
2	TE-VAI-3 LUG	
X 1	SEE CHART CABLE, INSULATED	
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK CABLE ASSY., FILAMENT RTP		
STOCK SIZE		
MATERIAL		
TYPE & TEMPER		
HEAT TREAT. SPEC		
FINISH & SPEC. NO.		

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A 1	REPLACED BY CA-405 & CA-404-1	7-10-63	9507	Ⓜ.		

TYPE & TEMPER	HEAT TREAT. SPEC	DRAWN	CHECKED	FINAL APPROVAL
		ADD 10/31/56	AND	WDC
				CA-319 A

TOLERANCES  
 MAXIMUM ALLOWABLE TOLERANCES HAVE  
 BEEN DETERMINED AND ANY DEVIATIONS  
 WILL BE CAUSE FOR REJECTION.  
 REMOVE ALL BURRS AND SHARP EDGES