


CA-320 A

REQ. PER UNIT	MODEL	USED ON ASSY. NO.	DATE
1	RTP		10-31-56
1	RTP-2		

ALLOWS 3/8 EACH END FOR STRIPPING

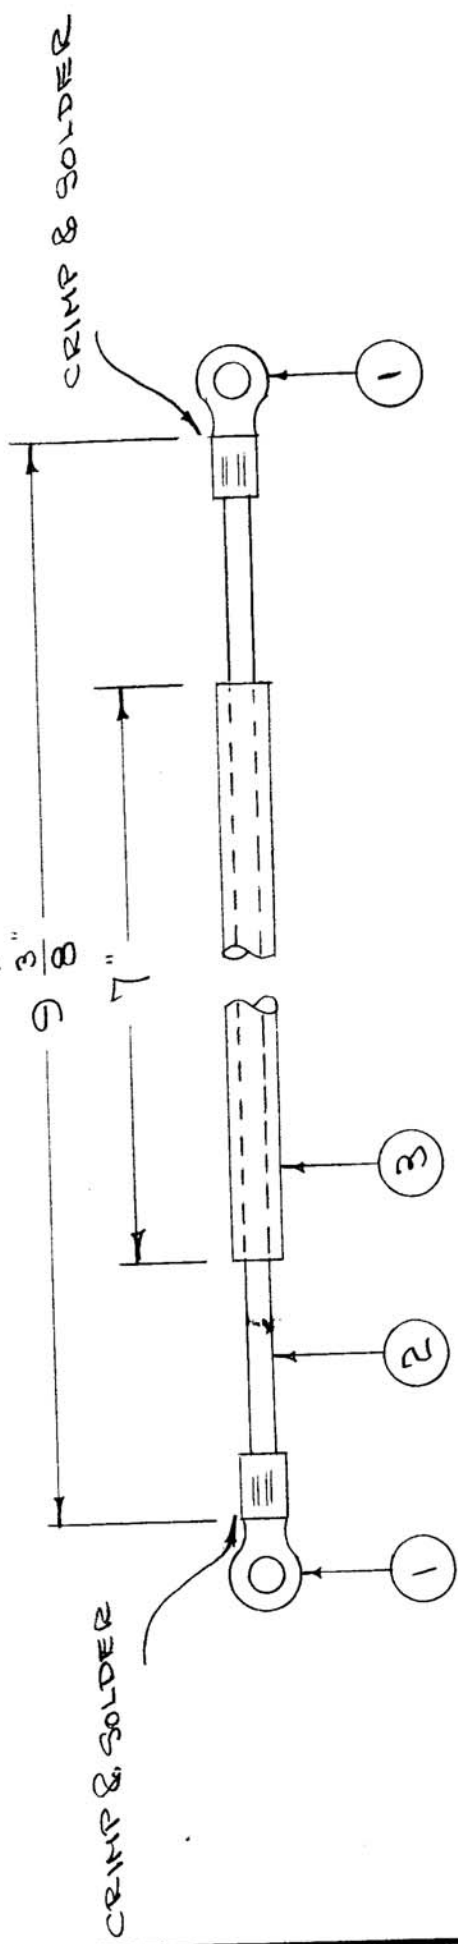

SUPERSEDED

CA-404-1 WITH MODIFICATION

FROM 1/606 PIN F TO 1/607 PIN F

7-10-63 EMN 9500

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X A	BS-100	SOLDER, SOFT	
7"	PX3A2-1-.263	SLEEVING	
9 3/8"	SRR6(19)2U90	CABLE, INSULATED WH/BLK	
2	TE-141-3	LUG	

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
CABLE ASSY., FILAMENT RTP	
DATE: 10/31/56	CHECKED: [Signature]
DRAWN: [Signature]	FINAL APPROVAL: [Signature]
TYPE & TEMPER	HEAT TREAT. SPEC.
FINISH & SPEC. NO.	ELEC. DES. APP. MECH. DES. APP.
	CA-320 A

ISSUE ITEM: A 1
 CHANGED FROM: 7-10-63 9500
 DATE: 7-10-63
 CH. NO.: 9500
 DRAFTS: 2
 CHECKER: [Signature]
 ENG. APP.: [Signature]

SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

TOLERANCES:
 DEC. DIM. ±
 FRAC. DIM. ±
 ANGULAR DIM. ±