
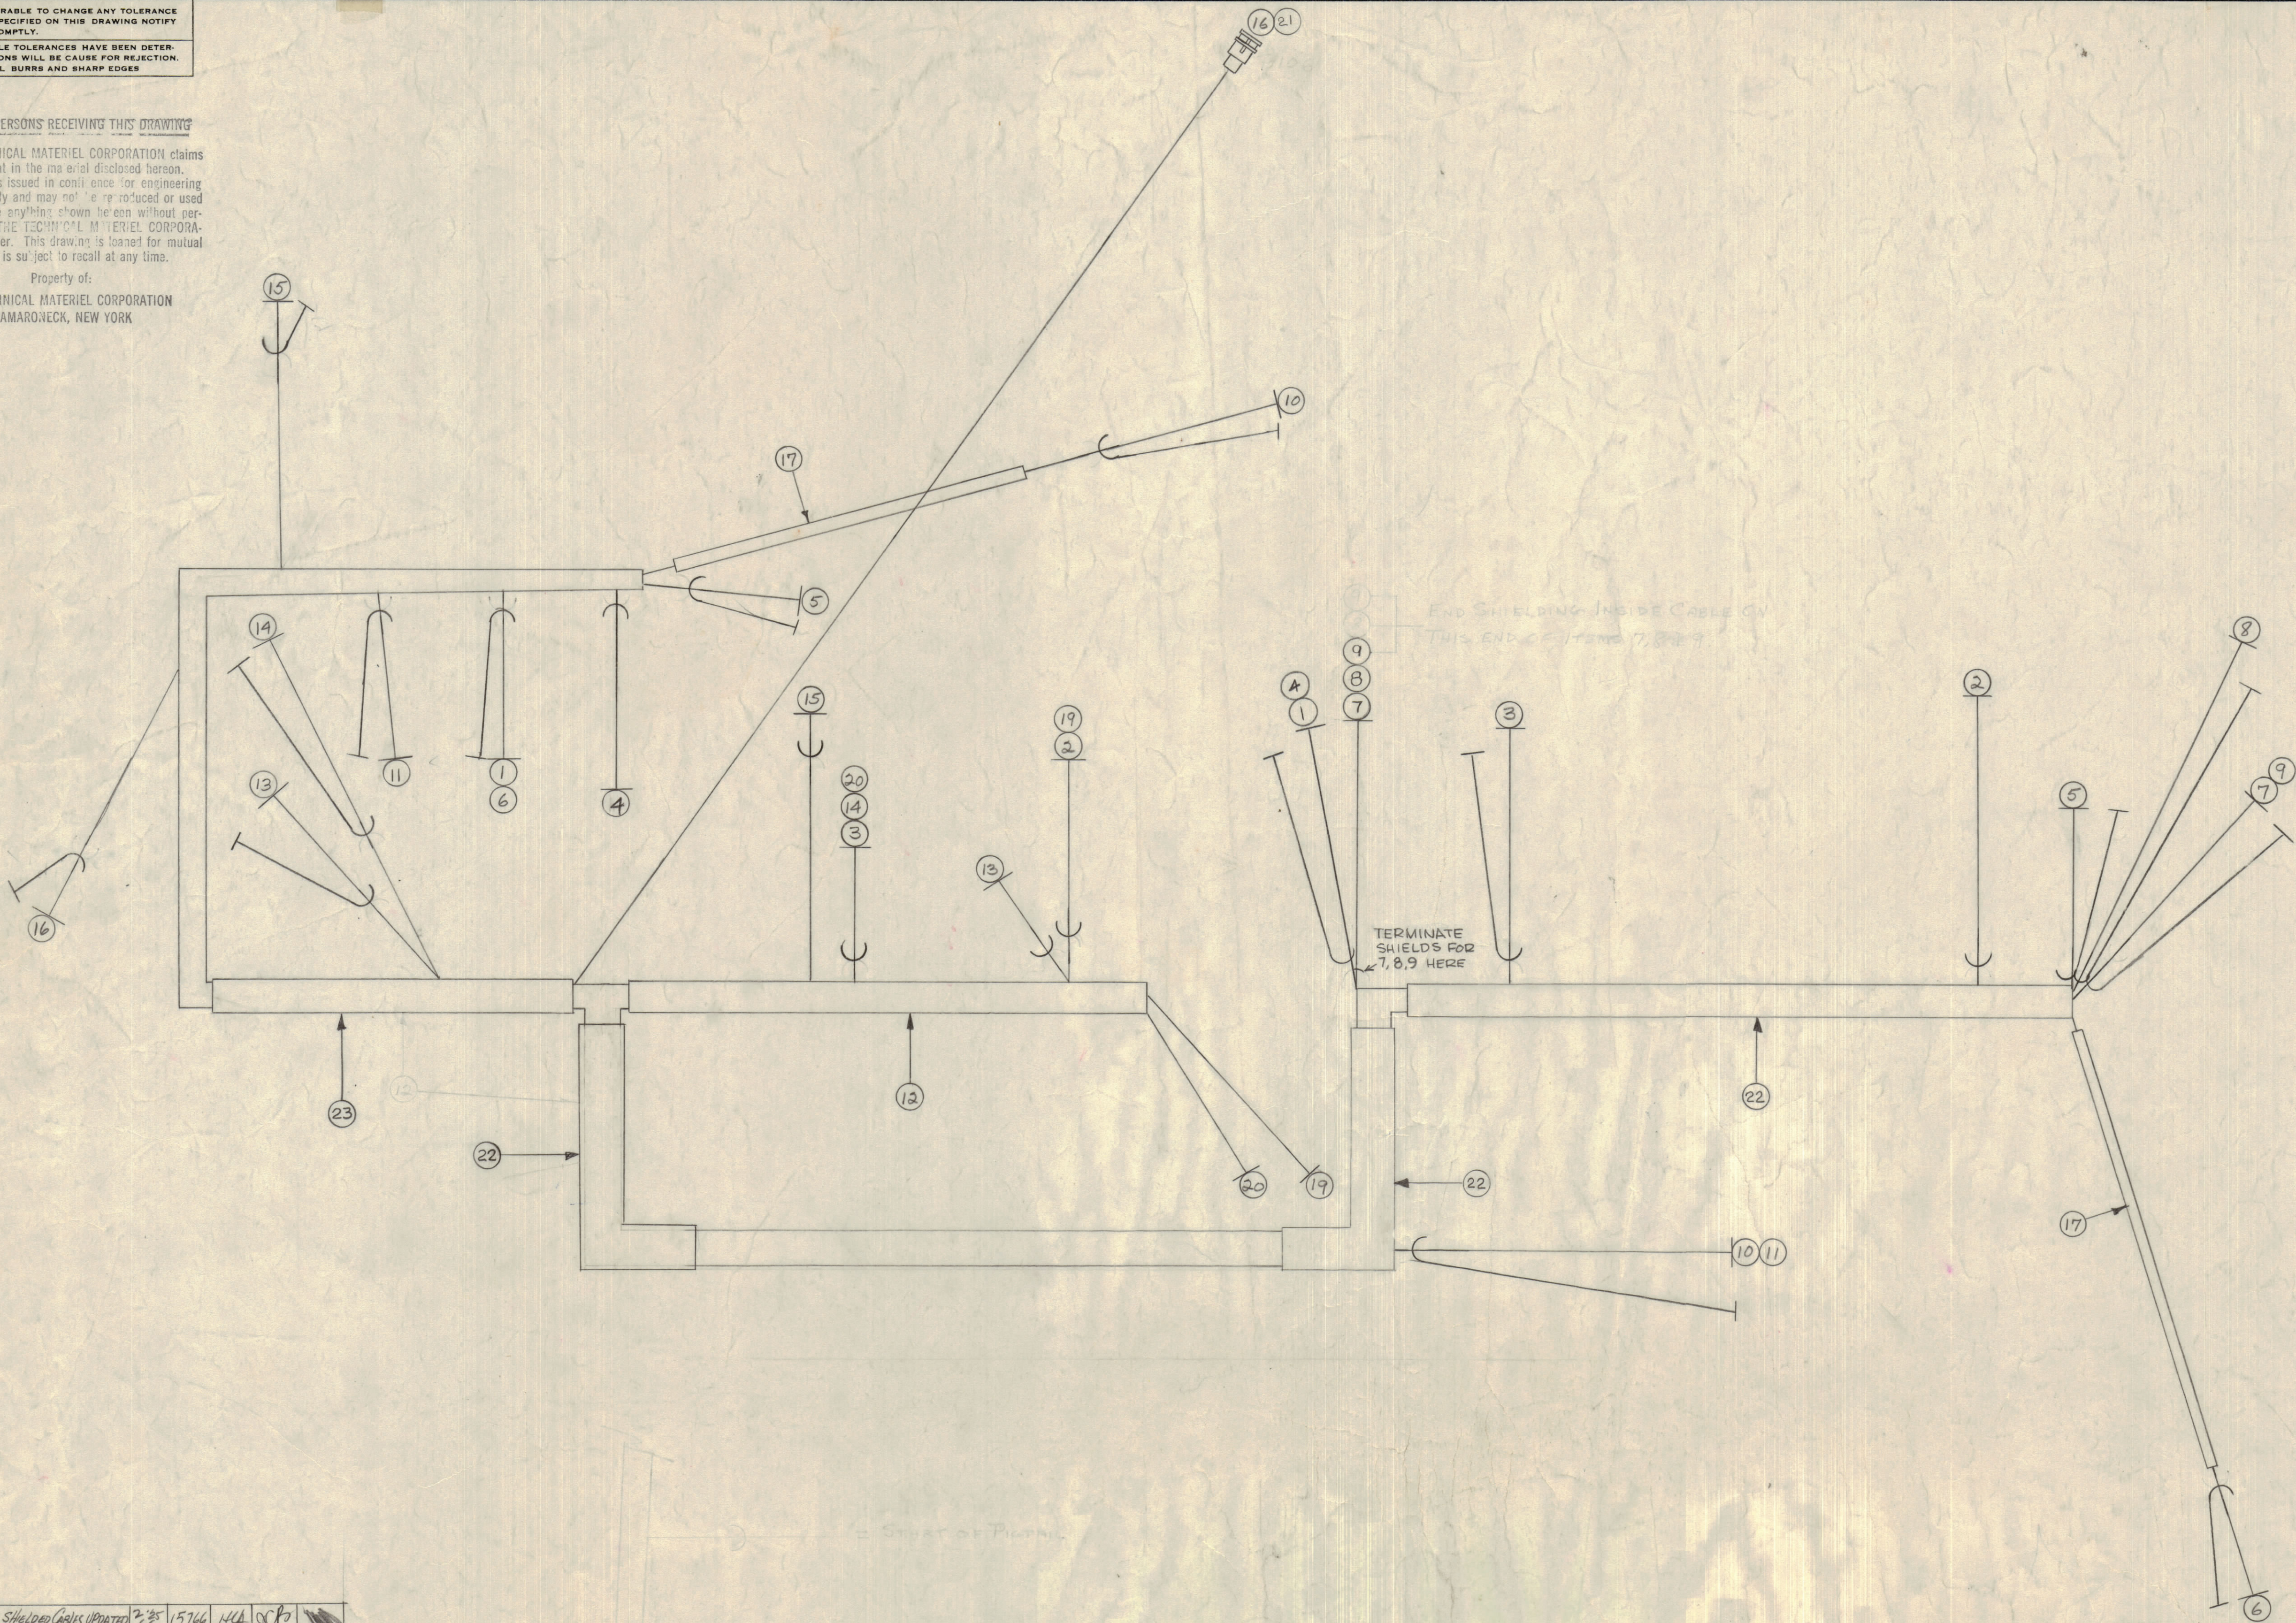


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

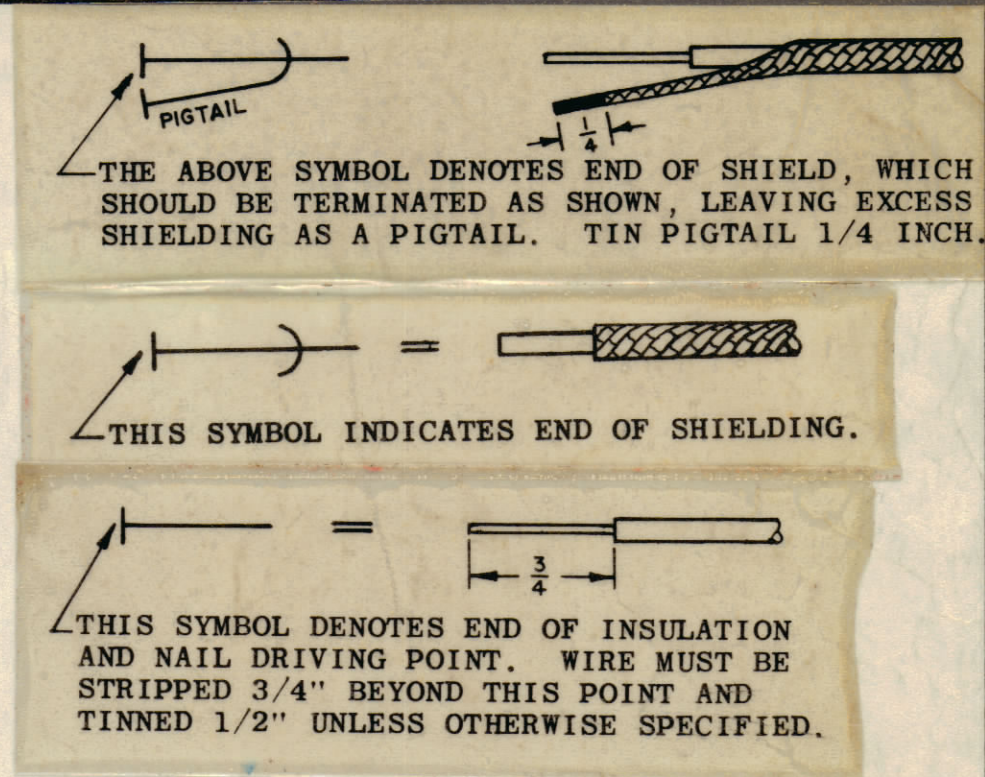

CA-348

H	on 8/4 Shielded Cables Updated	2/25	15766	NCA	CPD	
G	WIRE TERMINATED SHIELD WIRE'S ADD BOWTIE REVISION	1/16/66	15569	F.V.	CPD	
F	CALLOUT 23 ADDED CALLOUT 22 WAS 12 (3 PL.) IT 22 & 23 ADDED	10/24/64	12729	JCB	CPD	
E	UPDATED BUILDUP	10/15/64	483	J.C.B.	CPD	
D	#22 SHIELDED CABLE WAS 24	10/15/64	483	J.C.B.	CPD	
C	ANOTHER STRIP OF ITEM 12 ADDED	7/22/68	2	V6	CPD	
B	2ND COMPLETE REV.	1/23/67	1	REP	CPD	

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES							
SCALE:							
ALL OTHERS	DEC. DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					
	FRACTIONAL DIM. ±						
	ANGULAR DIM. ±						

23	PX100-1-438	INSULATION, SLEEVING	
22	PX100-1-375	INSULATION, SLEEVING	
1	PL-154	CONNECTOR, PLUG	
8 1/2	20 MWC22(7)U-5	CABLE, INSULATED	GRN
7 3/4	19 MWC22(7)U-9	CABLE, INSULATED	WHITE
X	18 2D-101-1-MW	CORD, LACING	BLK
4	17 PX-100-1-133	INSULATION, SLEEVING	BLK
25 3/4	16 RG-174/U	CABLE, RF	
22	15 RG-174/U	CABLE, RF	
13 1/4	14 MWC22(7)S12	CABLE, INSULATED, SHIELDED	RED
14	13 MWC22(7)S16	CABLE, INSULATED, SHIELDED	BLUE
X	12 PX-100-1-294	INSULATION, SLEEVING	BLK
31	11 MWC22(7)S19	CABLE, INSULATED, SHIELDED	WHITE
38 3/4	10 MWC22(7)S12	CABLE, INSULATED, SHIELDED	RED
16 1/2	9 MWC22(7)S12	CABLE, INSULATED, SHIELDED	RED
18	8 MWC22(7)S15	CABLE, INSULATED, SHIELDED	GRN
16 1/2	7 MWC22(7)S16	CABLE, INSULATED, SHIELDED	BLUE
44 1/2	6 MWC22(7)S15	CABLE, INSULATED, SHIELDED	GRN
41 1/2	5 MWC22(7)S16	CABLE, INSULATED, SHIELDED	BLUE
35	4 MWC22(7)S15	CABLE, INSULATED, SHIELDED	GRN
24 1/4	3 MWC22(7)S15	CABLE, INSULATED, SHIELDED	GRN
33 1/2	2 MWC22(7)S19	CABLE, INSULATED, SHIELDED	WHITE
33 1/4	1 MWC22(7)S12	CABLE, INSULATED, SHIELDED	RED

1	SBE-2	A-1516	5-2-58
1	SBE-1		7-24-57
REQ PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.
			DATE
USED ON			

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
STOCK SIZE	CABLE, AUDIO		
MATERIAL	SBE-1		
TYPE & TEMPER	RWB 1-23-58	DRAWN	ELEC. DES. APP. MECH. DES. APP.
HEAT TREAT SPEC.	CHECKED	FINAL APPROVAL	
FINISH & SPEC. NO.	CA-348		