


REQ. PER UNIT	MODEL	USED ON
	SEE CHART	ASBY. NO.
		DATE
		CA-386
		D

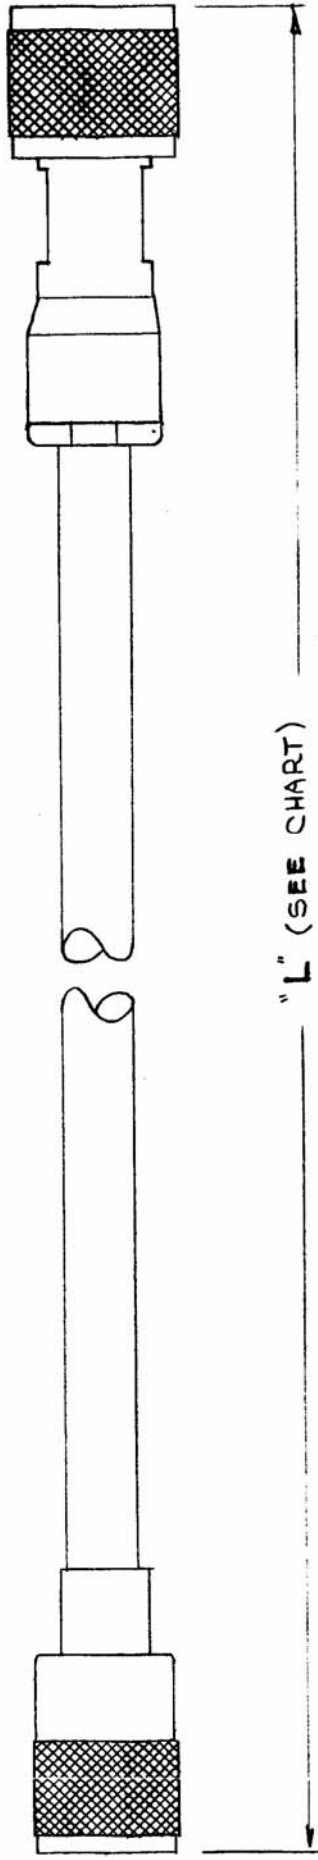

TMC PART NO.	ITEM 3	DIM. "L"	USED ON MODEL
CA-386-1	RG-11/U	16	TRL-1 / 70 Ω
CA-386-2	RG-8/U	16	TRL-2 / 50 Ω
CA-386-3	RG-8/U	22	TRL-3 / 50 Ω
CA-386-4	RG-11/U	22	TRL-4 / 70 Ω

D	-3/-4 OBSOLETE REPAIR.	"24.65	15252	H.V.V.	JCB	MM
C	ERROR USE REVISION "D"					
B	ADDED 3 + 4	6/3/60	2406	CA	JCB	JCB
A	ADDED "L" DIM. WAS 16"	8/27/58	1	ACC	JCB	JCB

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES		SCALE:	4x
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			

OBSOLETE - REPLACED BY CA480-120-16
OBSOLETE - REPLACED BY CA480-120-22

X 4	BS-100	Solder, Soft				
X 3	SEE CHART	Cable, Coaxial				
1	UG-59B/U	Connector, Plug				
1	PL-259A TEF	Connector, Plug				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP.	
		MAMARONECK.	NEW YORK
		CABLE ASS'Y, UHF	

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		15 9/16/58	JCB	JCB
FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.		
		CA-386		