IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

NOTE ~ WIRE LENGTHS SHOWN ARE TOTAL LENGTHS, ALLOW 1/2" EACH END FOR STRIPPING AND TINNING.

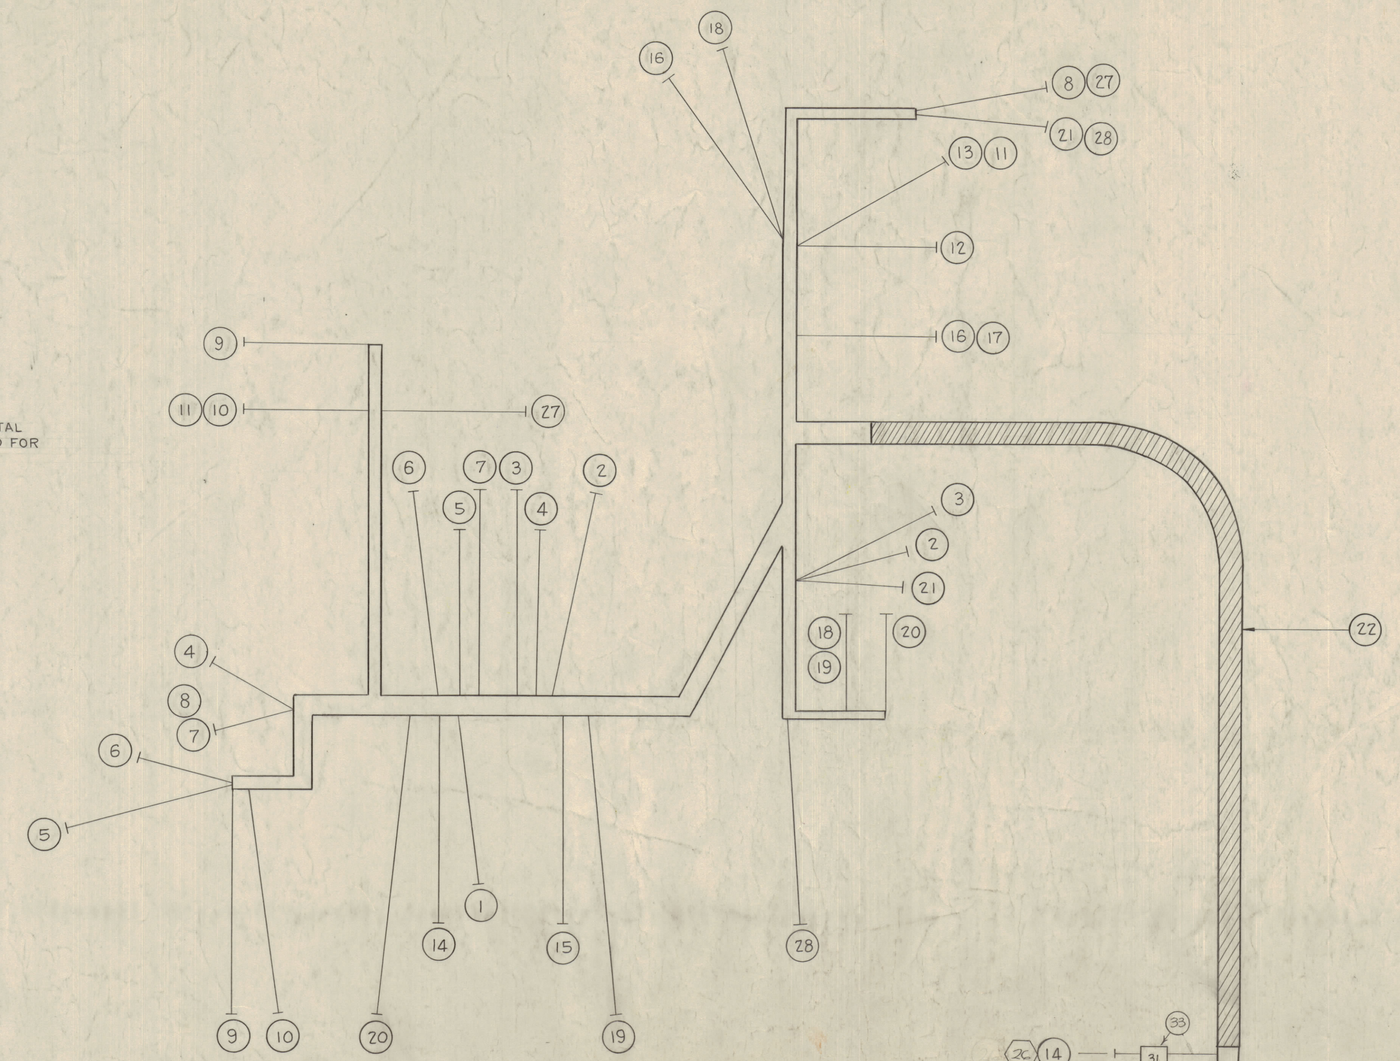

BOTTOM OF CABLE

SYMBOL NOTES
DENOTES ITEM NO'S
DENOTES LUG NO'S



ATTACH SPEEDY TABS OF NUMBERS SHOWN

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	33	LA101-31	MARKER, WIRE	
1	32	-30		
1	31	-28		
1	30	-27		
1	29	LA101-26	MARKER, WIRE	
	28	MWC22(7)U96	CABLE, INSULATED	WH/BLUE
	27	MWC22(7)U95	CABLE, INSULATED	WH/GRN
6	26	TE-120-2	LUG, SPADE	
1	25	LA-101	MARKER, WIRE	
	24	BS-100	SOLDER, SOFT	
	23	CD-101-3-MW	LACING CORD	
	22	PX-100-1-315	INSULATION, SLEEVING #4	
	21	MWC22(7)U6	CABLE, INSULATED	BLUE
	20	3		ORANGE
	19	4		YELLOW
	18	4		"
	17	92		WH/RED
	16	92		"
	15	0		BLACK
	14	8		GRAY
	13	2		RED
	12	7		VIOLET
	11	2		RED
	10	2		"
	9	92		WH/RED
	8	5		GREEN
	7	5		"
	6	92		WH/RED
	5	96		WH/BLUE
	4	6		BLUE
	3	91		WH/BRN
	2	1		BROWN
	1	1		"

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
A		SYMBOL NOTES ADDED QTY ADDED IT 25&26 ITEM 30-33 ADDED	12-66	17385	LMO		

TOLERANCES

ALL OTHERS: DEC. DIM. ±, FRAC. DIM. ±, ANGULAR DIM. ±

SCALE:

DRILL PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATERGORY.
1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS
SPACE LACING APPROXIMATELY 3/4" APART.





THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
1	RTP-2			10-29-58

USED ON

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

STOCK SIZE	
MATERIAL	WEIGHT PER PC.
TYPE & TEMPER	
HEAT TREAT. SPEC.	
FINISH & SPEC. NO.	

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CABLE, SUB CHASSIS
RTP-2

DRAWN	ELEC. DES. APP.	MECH. DES. APP.
J.C. BIELE		
CHECKED	FINAL APPROVAL	

CA-403 A

CA-403 A

FORM-111