



CA 433 B

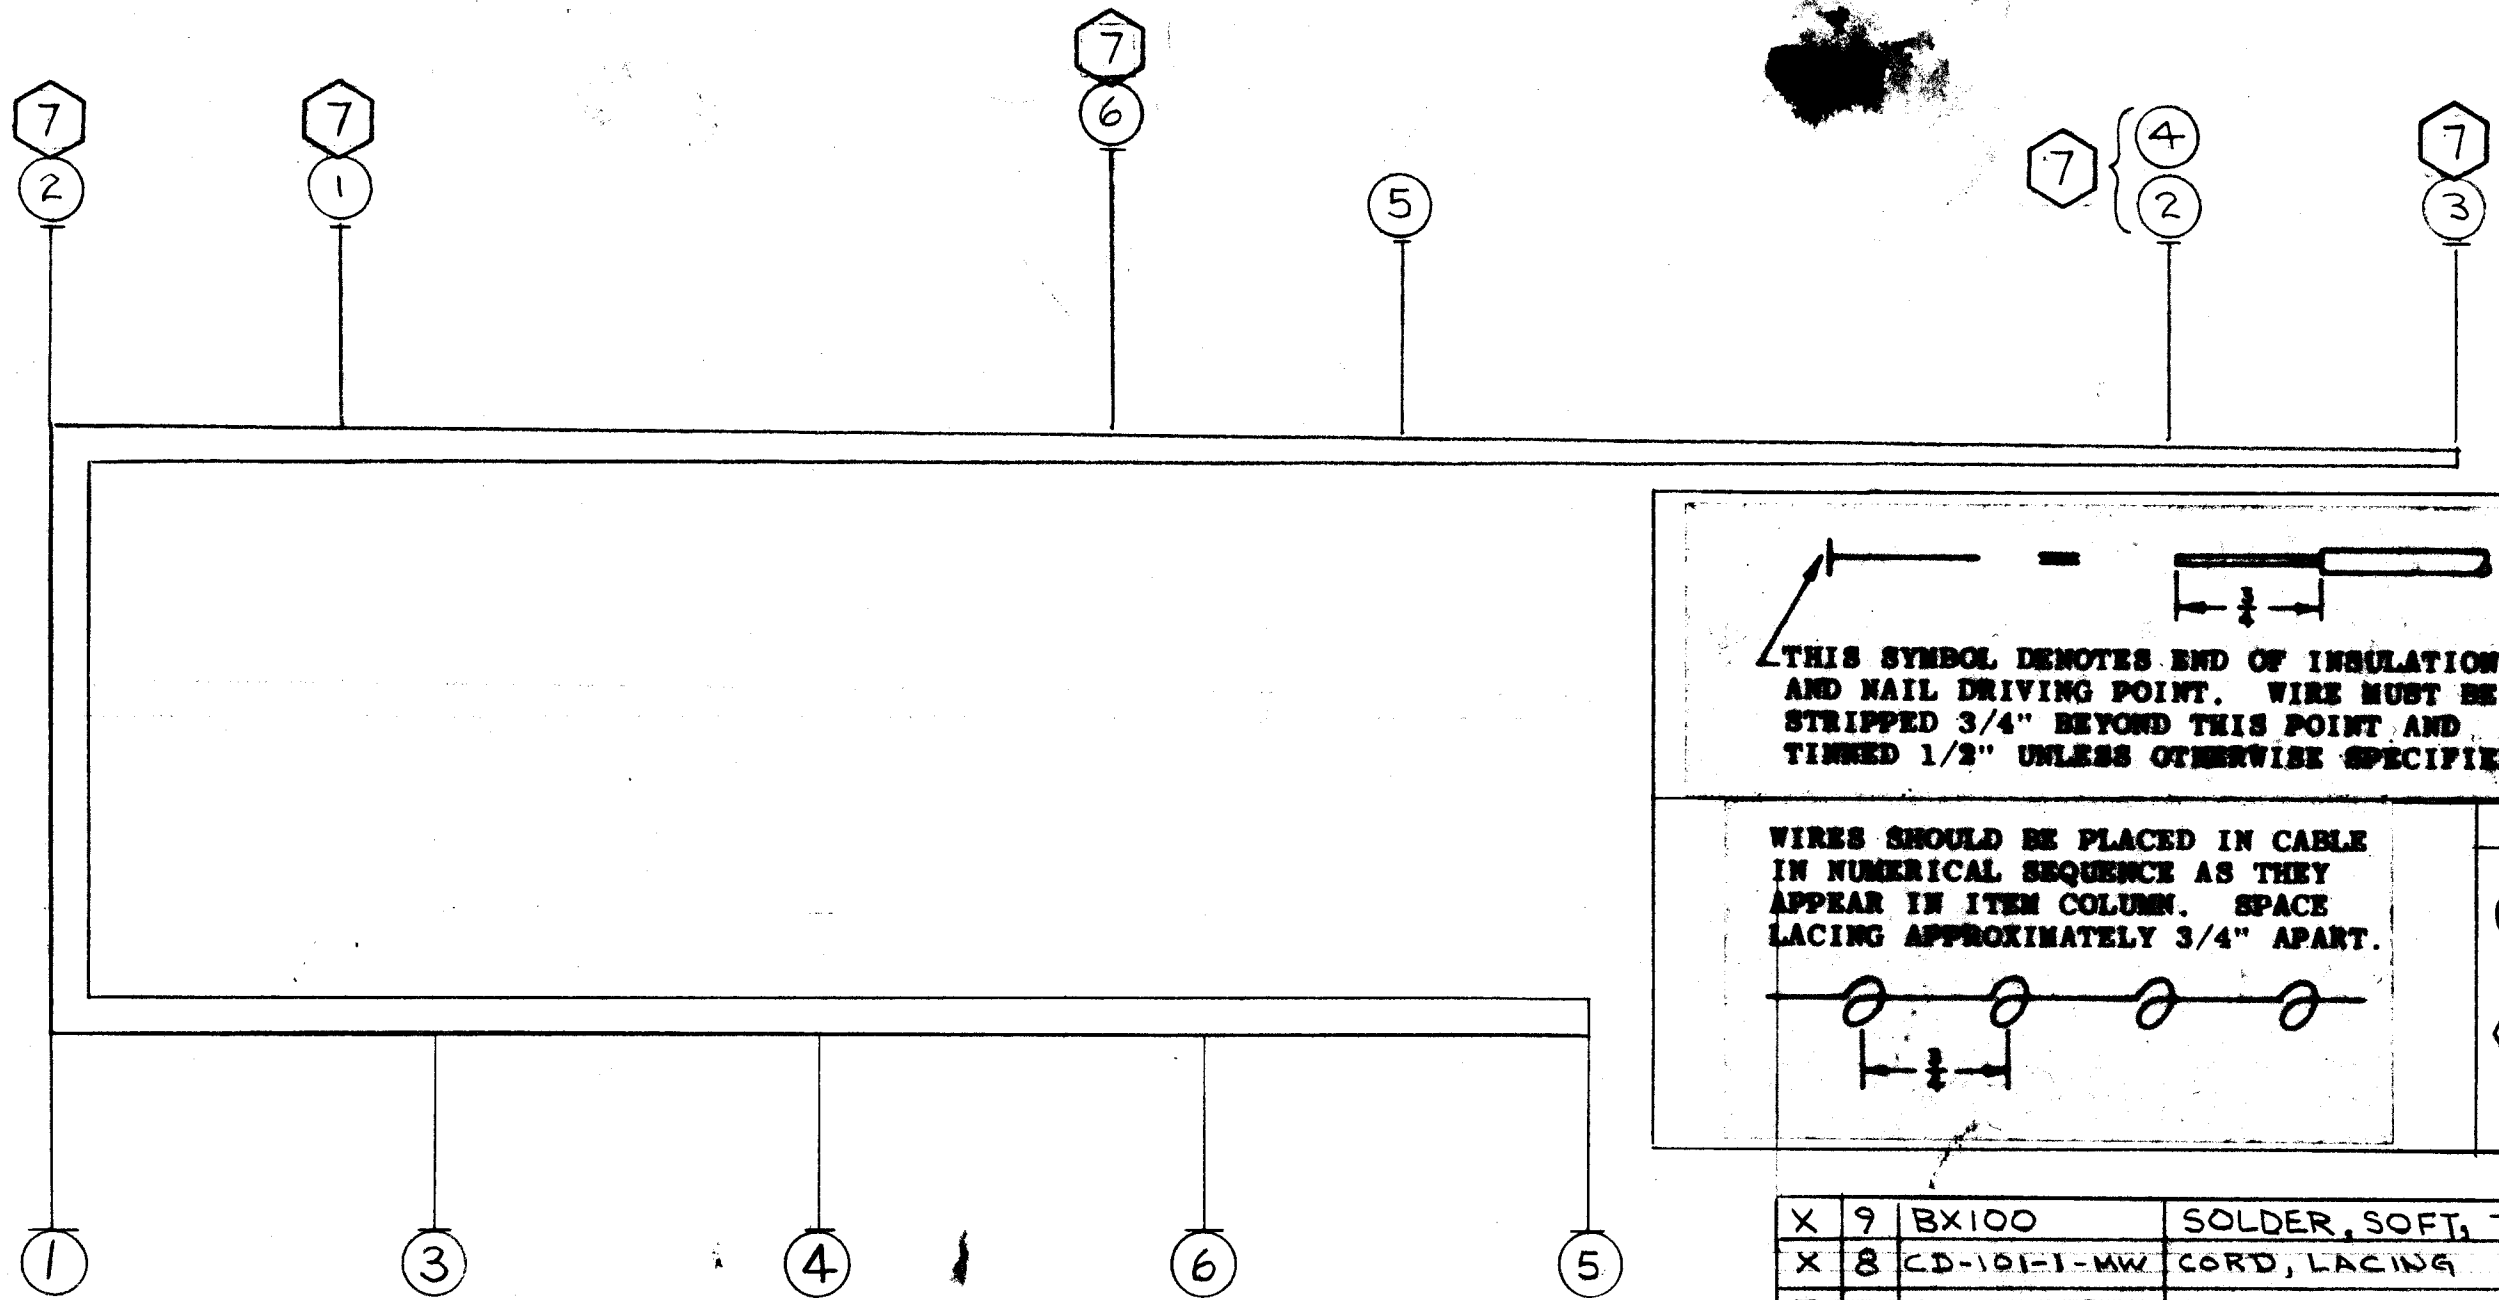

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.



SYMBOL DENOTES

- = ITEM NO.
- ⬡ = TERMINAL LUG IT. NO.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

X	9	BX100	SOLDER, SOFT, TIN ALLOY	
X	8	CD-101-1-MW	CORD, LACING	
5	7	TE-156-32953	SOLDESS TERMINAL	
	6	MWC22(7)U 93	WIRE, HOOKUP, ELEC. INSUL.	WH/OR
	5		50	WH/BK
	4		0	BLACK
	3		96	WH/BL
	2		0	BLACK
	1	MWC22(7)U 6	WIRE, HOOKUP, ELEC. INSUL.	BLUE
REQ. ITEM		PART NO.	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

MAIN CABLE, METER BOX
AUX. FRAME GPT-10K

B		ADD IT 9, RELOC IT 7, REVERSE ITS 5 & 6	1-10-67	17656	RME	<i>[Signature]</i>	<i>[Signature]</i>
A	1	BOTTOM LOOP (ITEMS #1, 3, 4, 5 & 6) INCREASED	7-16-63	9574	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES		SCALE:	
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.	
FRAC. DIM. ±		REMOVE ALL BURRS AND SHARP EDGES	
ANGULAR DIM. ±			

1	GPT-10K	AUX. FR.		3-6-59
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		<i>[Signature]</i>		<i>[Signature]</i>
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		

CA 433 B

USED ON