


CA-786

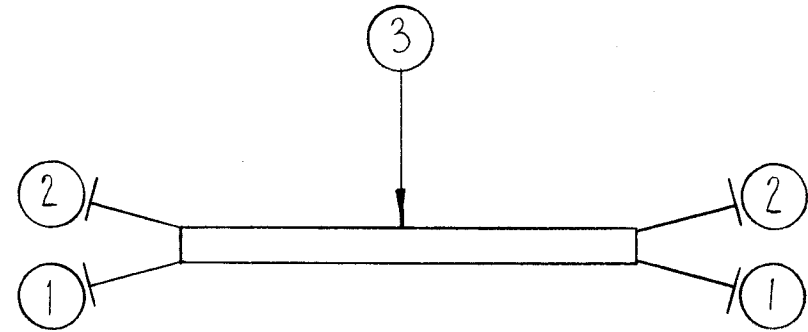

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
A	REDRAWN & REVISED				
O	ORIGINAL RELEASE FOR PRODUCTION	4-24-64		SRG	

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT & TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THIS EQUALS THIS

~SYMBOL NOTES~

○ DENOTES ITEM NOS.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROX. 3/4" APART.

NOTES

1	GPT-200K	AR-154
1	GPT-200K	AR-145
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

5	CD-101-1-MW	CORD LACING	BLACK	
4	BS-100	SOLDER, SOFT		
3	PX-100-1-294	SLEEVING, INSULATION	BLACK	
2	MWC 18 (16) B4	CABLE, INSULATED, FIBERGLASS	YELLOW	
1	MWC 18 (16) B91	CABLE, INSULATED, FIBERGLASS	WH/BRN	
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL

F. BUDETTI				LIST OF MATERIAL	
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH		TITLE CABLE ASS'Y., TUBE PROTECT RELAY B- JUMPER (RELAY A & B)			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN W.A. FRANCO CHECKED W.F.	DATE 5-6-63 DATE 2-7-64	FINAL APPROVAL RAC	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES. B.B.	DATE 2/12/64	CA-786 SHEET
					0 REV. LTR.