


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
E7	X1	ITEM(10) TO 5301 WAS END OF SHIELD	9-24-63	1	FS.	WJ
F5	X2	CABLE SHORTENED 1/2 INCH	10-29-63	2	FS.	WJ
	X3	ITEM 14 SYMBOL WAS J301-310; REVISED SOLDERING NOTE!	11/20/63	3	JL	WJ
	X4	ITEM (17) ADDED	2/20/64	4	FS.	WJ
	O	ORIGINAL RELEASE FOR PRODUCTION	6/1/64	0	A.M.	WJ
D2, C2	A	IT.17 WAS PX-643-G, IT.14 WAS JJ-293	8.11.64	12100	WJ	WJ
	B	ITEM 13 WAS PX100-1-.059; ITEM 18 ADDED; IT. 13 FIG ADDED TO PICTURE	9-18-64	12391	SRG	WJ

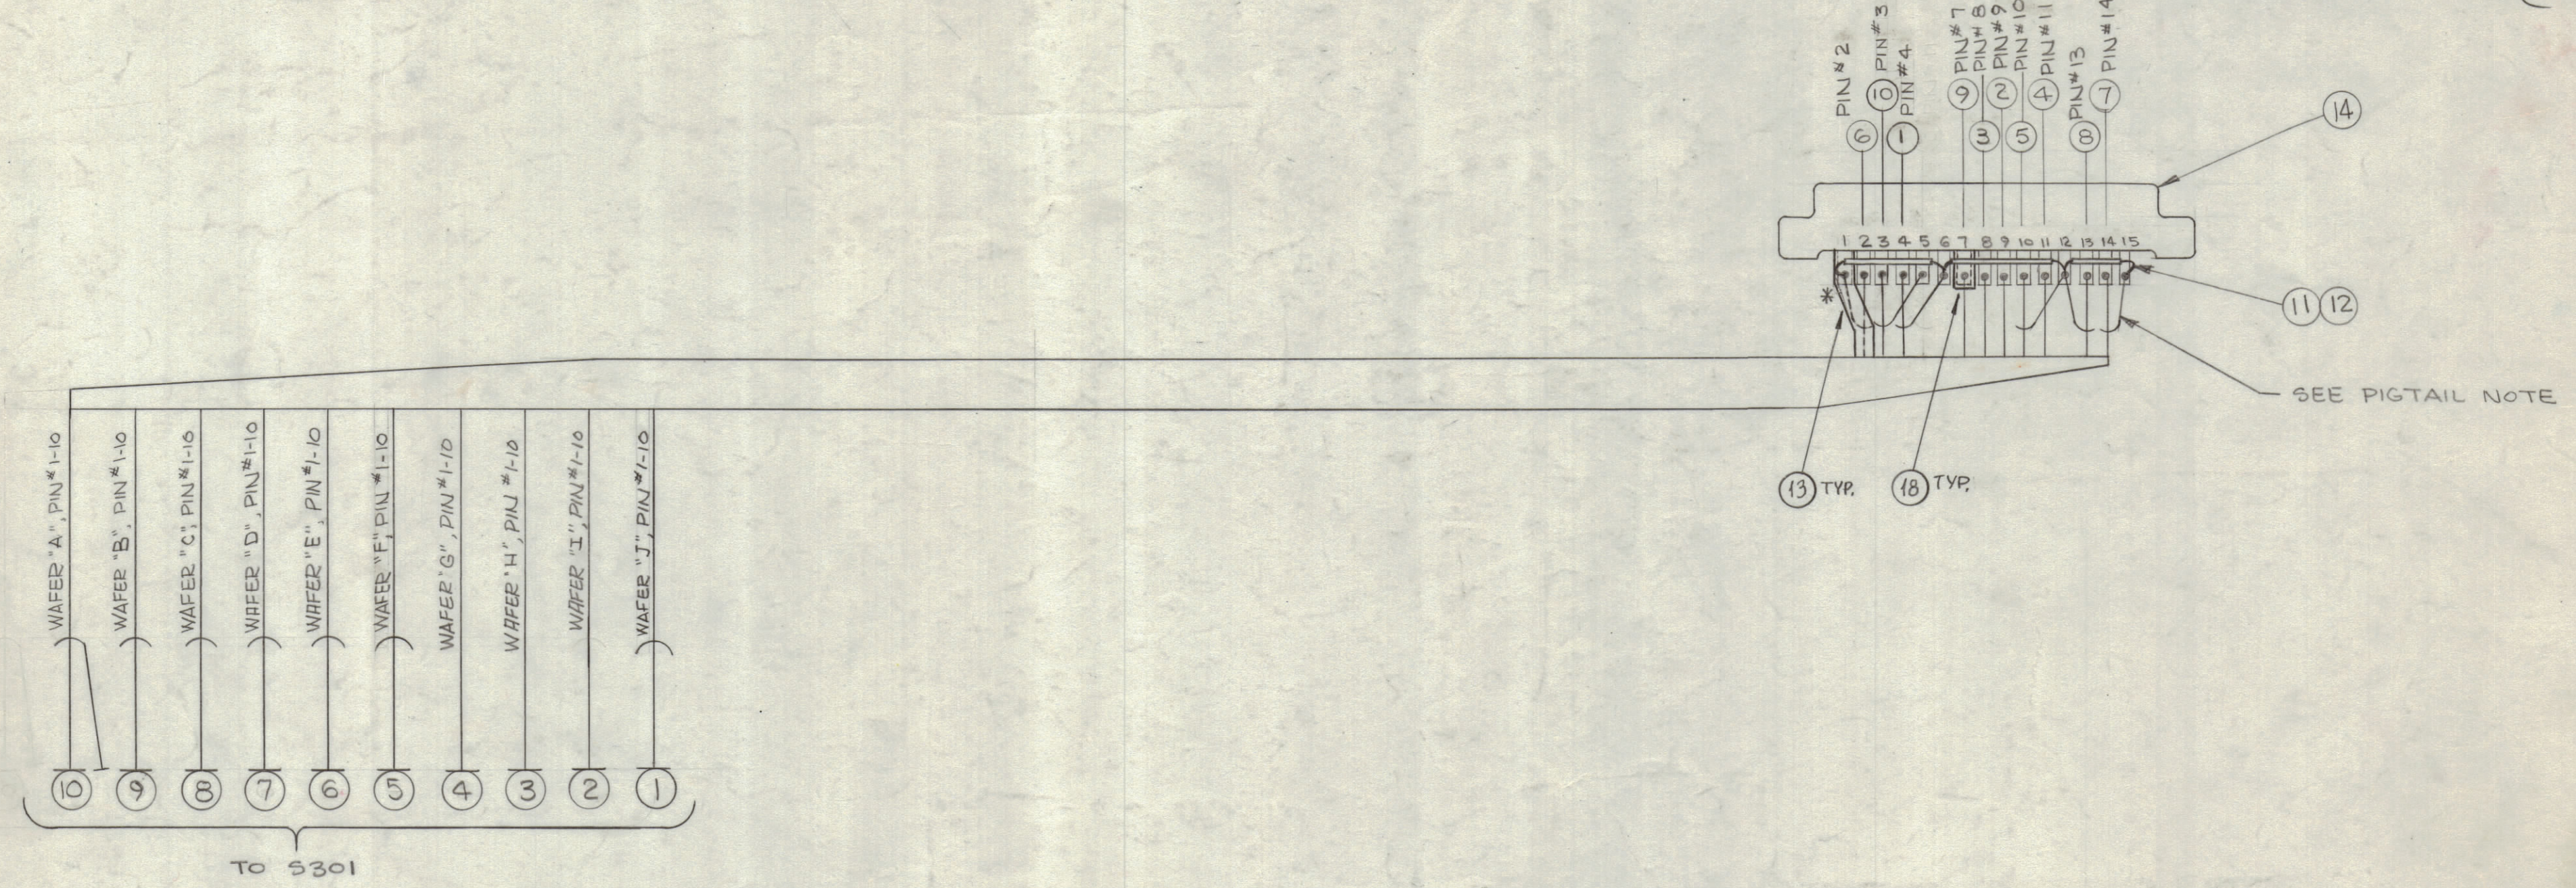

J304, 305, 306, J307, 308.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	18	PX100-1-.076	SLEEVING INSULATION	BLACK
X	17	PX-643-2	SLEEVING, SHRINK	BLK.
X	16	BS-100	SOLDER, SOFT	
X	15	CD-101-1-MW	CORD, LACING	BLACK
1	14	JJ-293-15S	CONNECTOR, RECEPTACLE, FEMALE	
X	13	PX-100-1-.118	SLEEVING, INSULATION	BLACK
X	12	PX-100-1-.034	SLEEVING, INSULATION	BLACK
X	11	WL-100-5	WIRE, BUSS BAR, TINNED	
17 5/8	10	MWC 24(7) SJ92	WIRE, HOOK-UP, SHIELDED	WH/RED
17 5/8	9	MWC 24(7) U4	WIRE, HOOK-UP	YELLOW
18	8	MWC 24(7) SJ95	WIRE, HOOK-UP, SHIELDED	WH/GRN
17 3/4	7	MWC 24(7) SJ94	WIRE, HOOK-UP, SHIELDED	WH/YEL
15 1/2	6	MWC 24(7) SJ96	WIRE, HOOK-UP, SHIELDED	WH/BLU
16 1/8	5	MWC 24(7) SJ93	WIRE, HOOK-UP, SHIELDED	WH/ORN
15 7/8	4	MWC 24(7) U5	WIRE, HOOK-UP	GREEN
14 7/8	3	MWC 24(7) U2	WIRE, HOOK-UP	RED
14 5/8	2	MWC 24(7) U6	WIRE, HOOK-UP	BLUE
13 3/8	1	MWC 24(7) SJ98	WIRE, HOOK-UP, SHIELDED	WH/GRAY

M. GELLMAN LIST OF MATERIAL			
MATERIAL	FINISH	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		TITLE	
		WIRING HARNESS - R.F. MODULES	
		DRAWN BY: <i>G. J. Green</i>	DATE: 7-30-63
		CHECKED: <i>@</i>	DATE: 3-7-64
		DESIGN: <i>W. J. Green</i>	DATE: 5-7-64
		MECH. DES: <i>W. J. Green</i>	DATE: 5-7-64
		FINAL APPROVAL: <i>Roe</i>	
		CA-806 B	
		SHEET	
		REV. LTR.	

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THIS SYMBOL INDICATES END OF SHIELDING. NOTE: WHEN CABLE IS BEING INSTALLED, ADD ITEM (17) IN PLACE.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

NOTE: ALL PIGTAILS TO BE COVERED WITH ITEM (13) PX-100-1-.059

* NOTE: DONOT SOLDER PIN NO. 1

5	VLR-1	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

NOTES