


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
X		EXPERIMENTAL RELEASE	2/24/65	X	SRG	
X1		ITEM 4 WAS WHT/OBN, ITEMS 16, 17, 18, 20, 21, 22, ADDED IT. 19 WAS PX 100-1-625, 33" WAS 27", CBL NOTES AW.	3-17-66	X1		
Ø		ORIGINAL RELEASE FOR TRD	4/15/64			

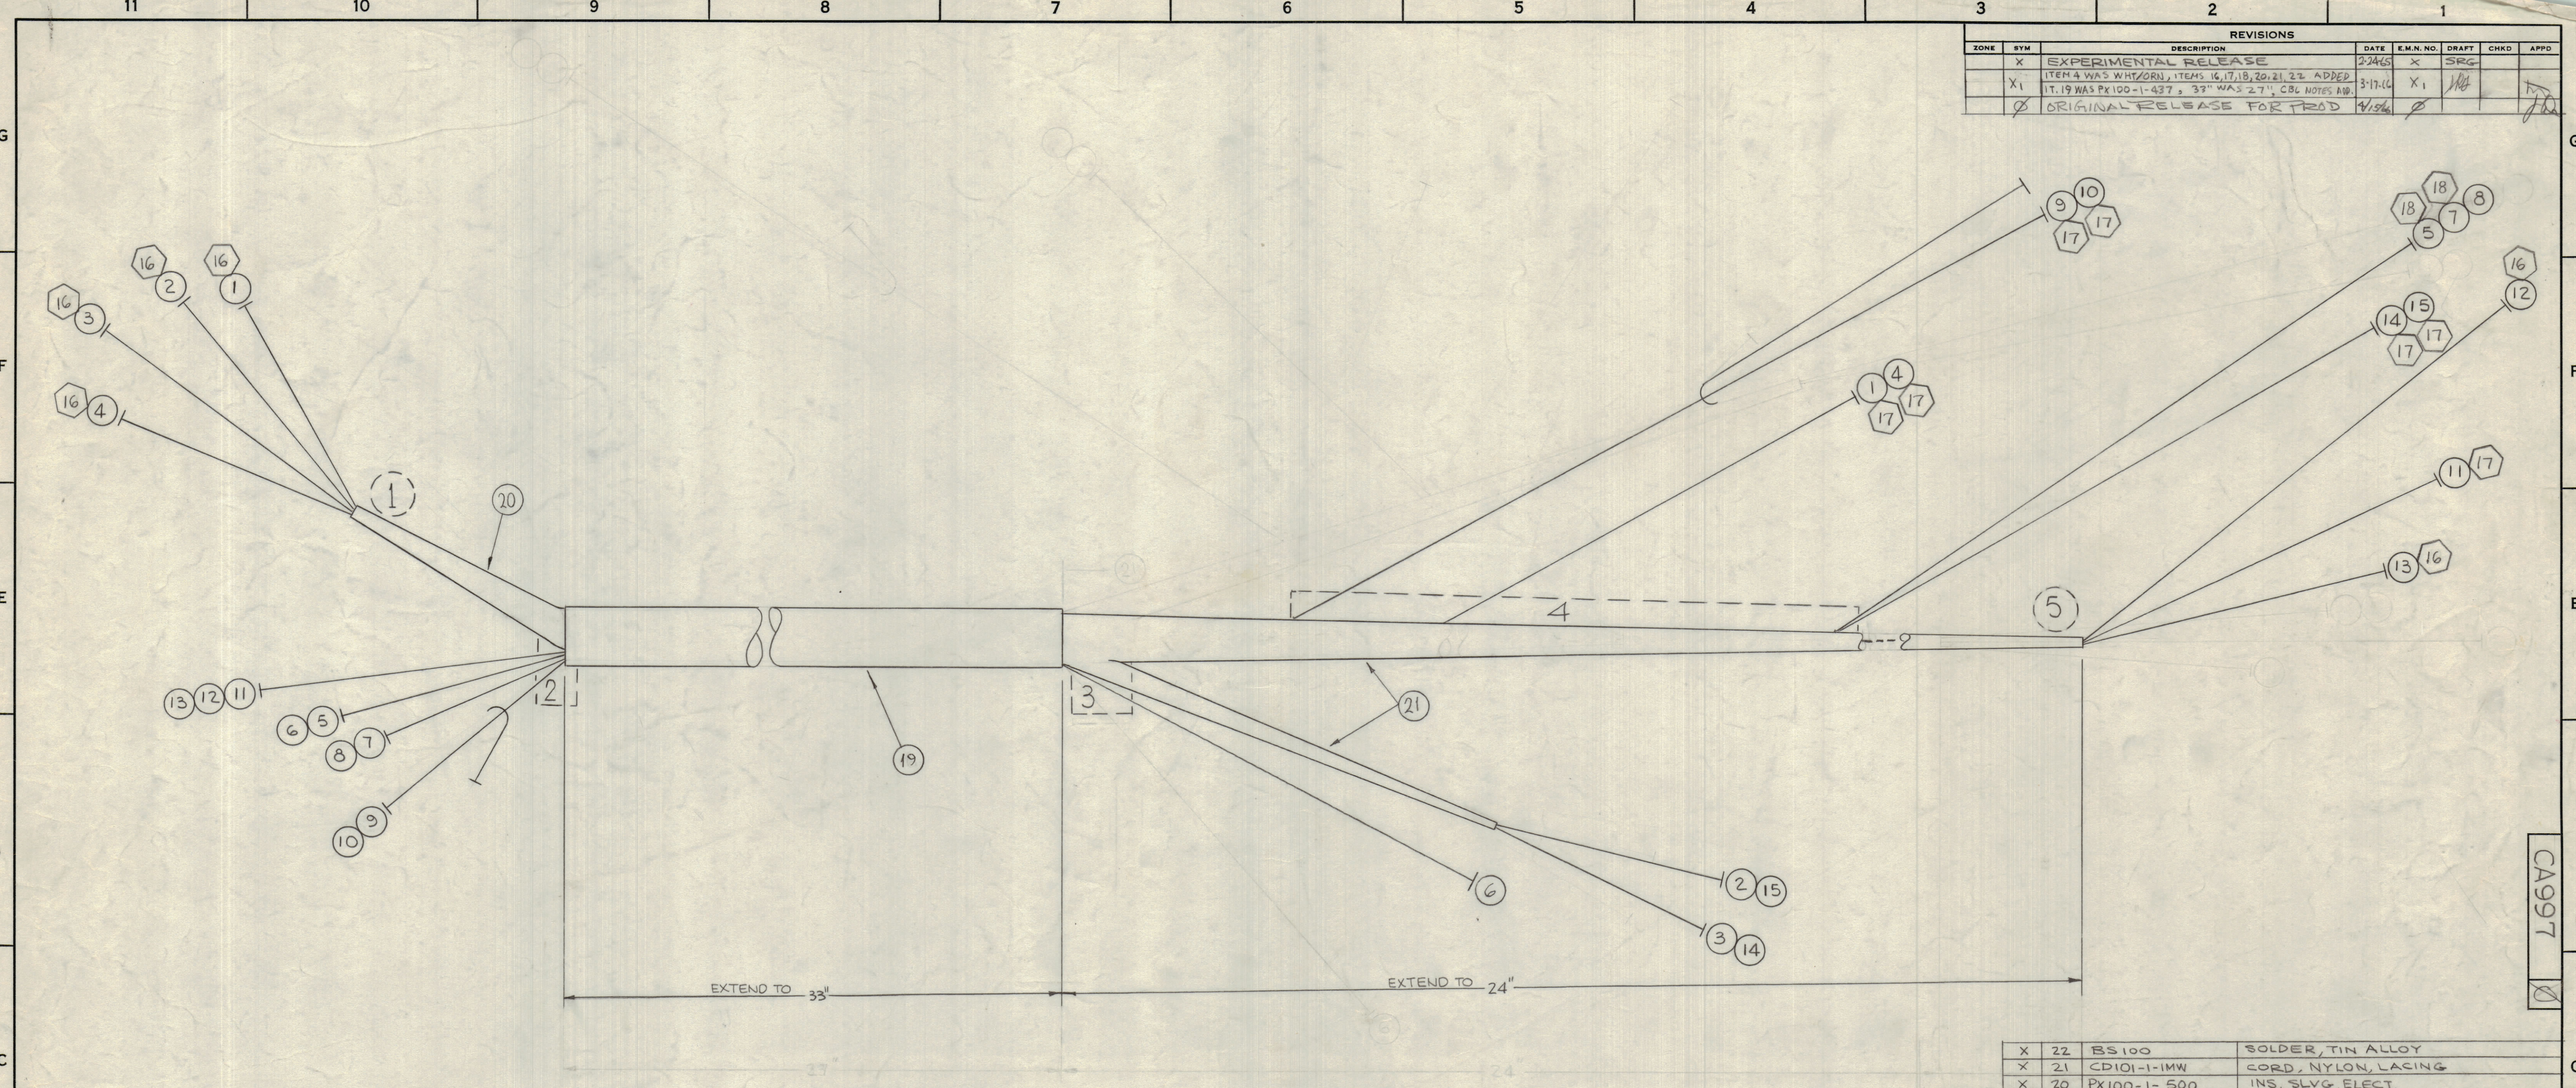

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	22	BS 100	SOLDER, TIN ALLOY	
X	21	CD101-1-1MW	CORD, NYLON, LACING	
X	20	PX100-1-500	INS. SLVG, ELECT.	
X	19	PX100-1-625	INS. SLVG, ELECT.	
2	18	TE120-2	TERM, LUG, SPADE	
7	17	TE159-32961	TERM, LUG-INS.	
6	16	TE159-34160	TERM, LUG-INS.	
3	4	15	HWC16(7)U9	MTR BOX E1012
3	4	14	HWC16(7)U2	MTR BOX E1011
2	5	13	MWC22(7)U94	JCT. BOX STANDOFF
2	5	12	U93	
2	5	11	U90	
2	4	10	SJ91	
2	4	9	SJ2	
2	4	8	U9	
2	4	7	U9	
2	3	6	U7	
2	4	5	MWC22(7)U4	JCT. BOX STANDOFF
1	4	4	HWC18(10)U94	JCT. BOX C1229
1	3	3	U2	
1	3	2	U9	
1	4	1	HWC18(10)U3	JCT. BOX C1228

UNLESS OTHERWISE SPECIFIED  
WIRES SHOULD BE PLACED IN NUMERICAL SEQUENCE  
AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION  
AND NAIL DRIVING POINT. WIRE MUST BE  
STRIPPED 3/4" BEYOND THIS POINT AND  
TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH  
SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS  
SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

NOTES

QTY.	UNIT	MODEL USED ON	ASSY. NO.
		GPTIOKLF	
		CODE	
		A	

F BUDETTI LIST OF MATERIAL			
MATERIAL	FINISH	TITLE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
		WIRING HARNESS, BRANCHED	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN	DATE	FINAL APPROVAL
DECIMALS ± .05 XX ± .01 XXX ± .005	CHECKED	DATE	DATE
FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES.	DATE	DATE
	MECH. DES.	DATE	DATE
		SHEET	REV. LTR.