


REQ. PER UNIT	1
USED ON	CA999
MODEL	GPT-10KLF
ASSY. NO.	AX534
DATE	3-3-66

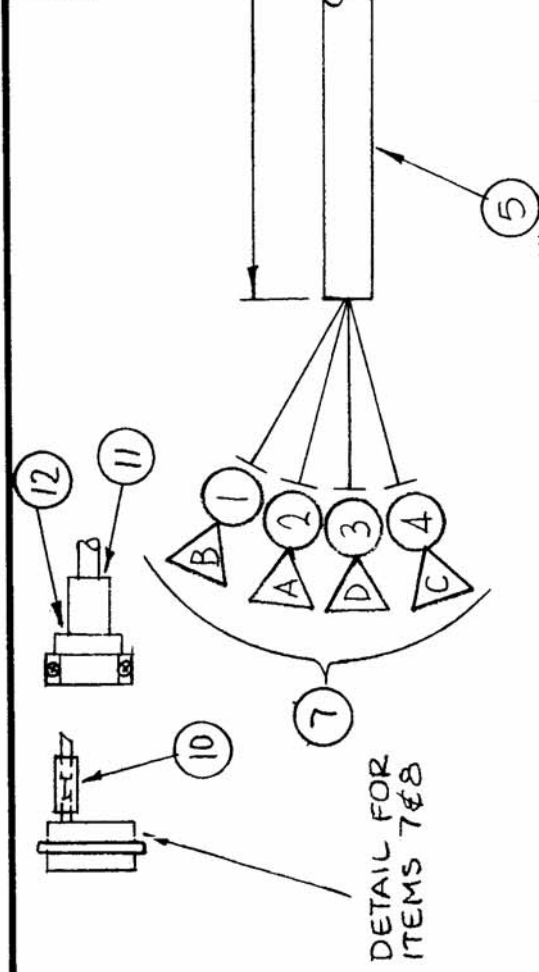

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
2	MS3057-6	CLP/CBL, EL. CONN.	
2	MS3420-6A	BUSHING, RUBBER	
X	PX100-1-129	INS. SLVG, ELECT	
X	BS100	SOLDER, TIN ALLOY	
1	MS3102A14S-2S	CONN. RECP. FML	
1	MS3106A14S-2P	CONN. PL. ML	
X	CD101-1MW	CORD, NYLON, LACING	
X	PX100-1-263	INS. SLVG ELECT.	ORN
4	MWC22(7)U3	WIRE, ELECT. INS.	YEL
3	U4		WHT
2	U9		RED
1	MWC22(7)U2	WIRE, ELECT. INS.	
		F. BUDETTI	
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		CABLE, JUMPER AUX FRAME	
		DRAWN	FINAL APPROVAL
		CHECKED	CA999
		ELEC. DES. APP.	
		MECH. DES. APP.	
		FINISH & SPEC. NO.	

UNLESS OTHERWISE SPECIFIED  
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE  
AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

ORIGINAL RELEASE FOR PRODUCTION

DATE: 3-7-66  
CH. NO.: Jc  
DRAFTS: Jc  
CHECKER: Jc  
ENG. APP.: Jc

SCALE: 1:1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: A

FRACTIONS: ± 1/64 ANGLES: ± 0° 30'

DECIMALS: .X ± .05 .XX ± .01 .XXX ± .005