


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.				OTHERWISE SPECIFIED			
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PRDD	APR 17 1968		AP	JW	JW
A		REV TO CEMN	JAN 25 1968	359	AP	JW	JW
B		REV TO CEMN	DEC 6 1967	411	AP	JW	KLN
C		REV TO CEMN	FEB 26 1968	452	AP	JW	JW

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

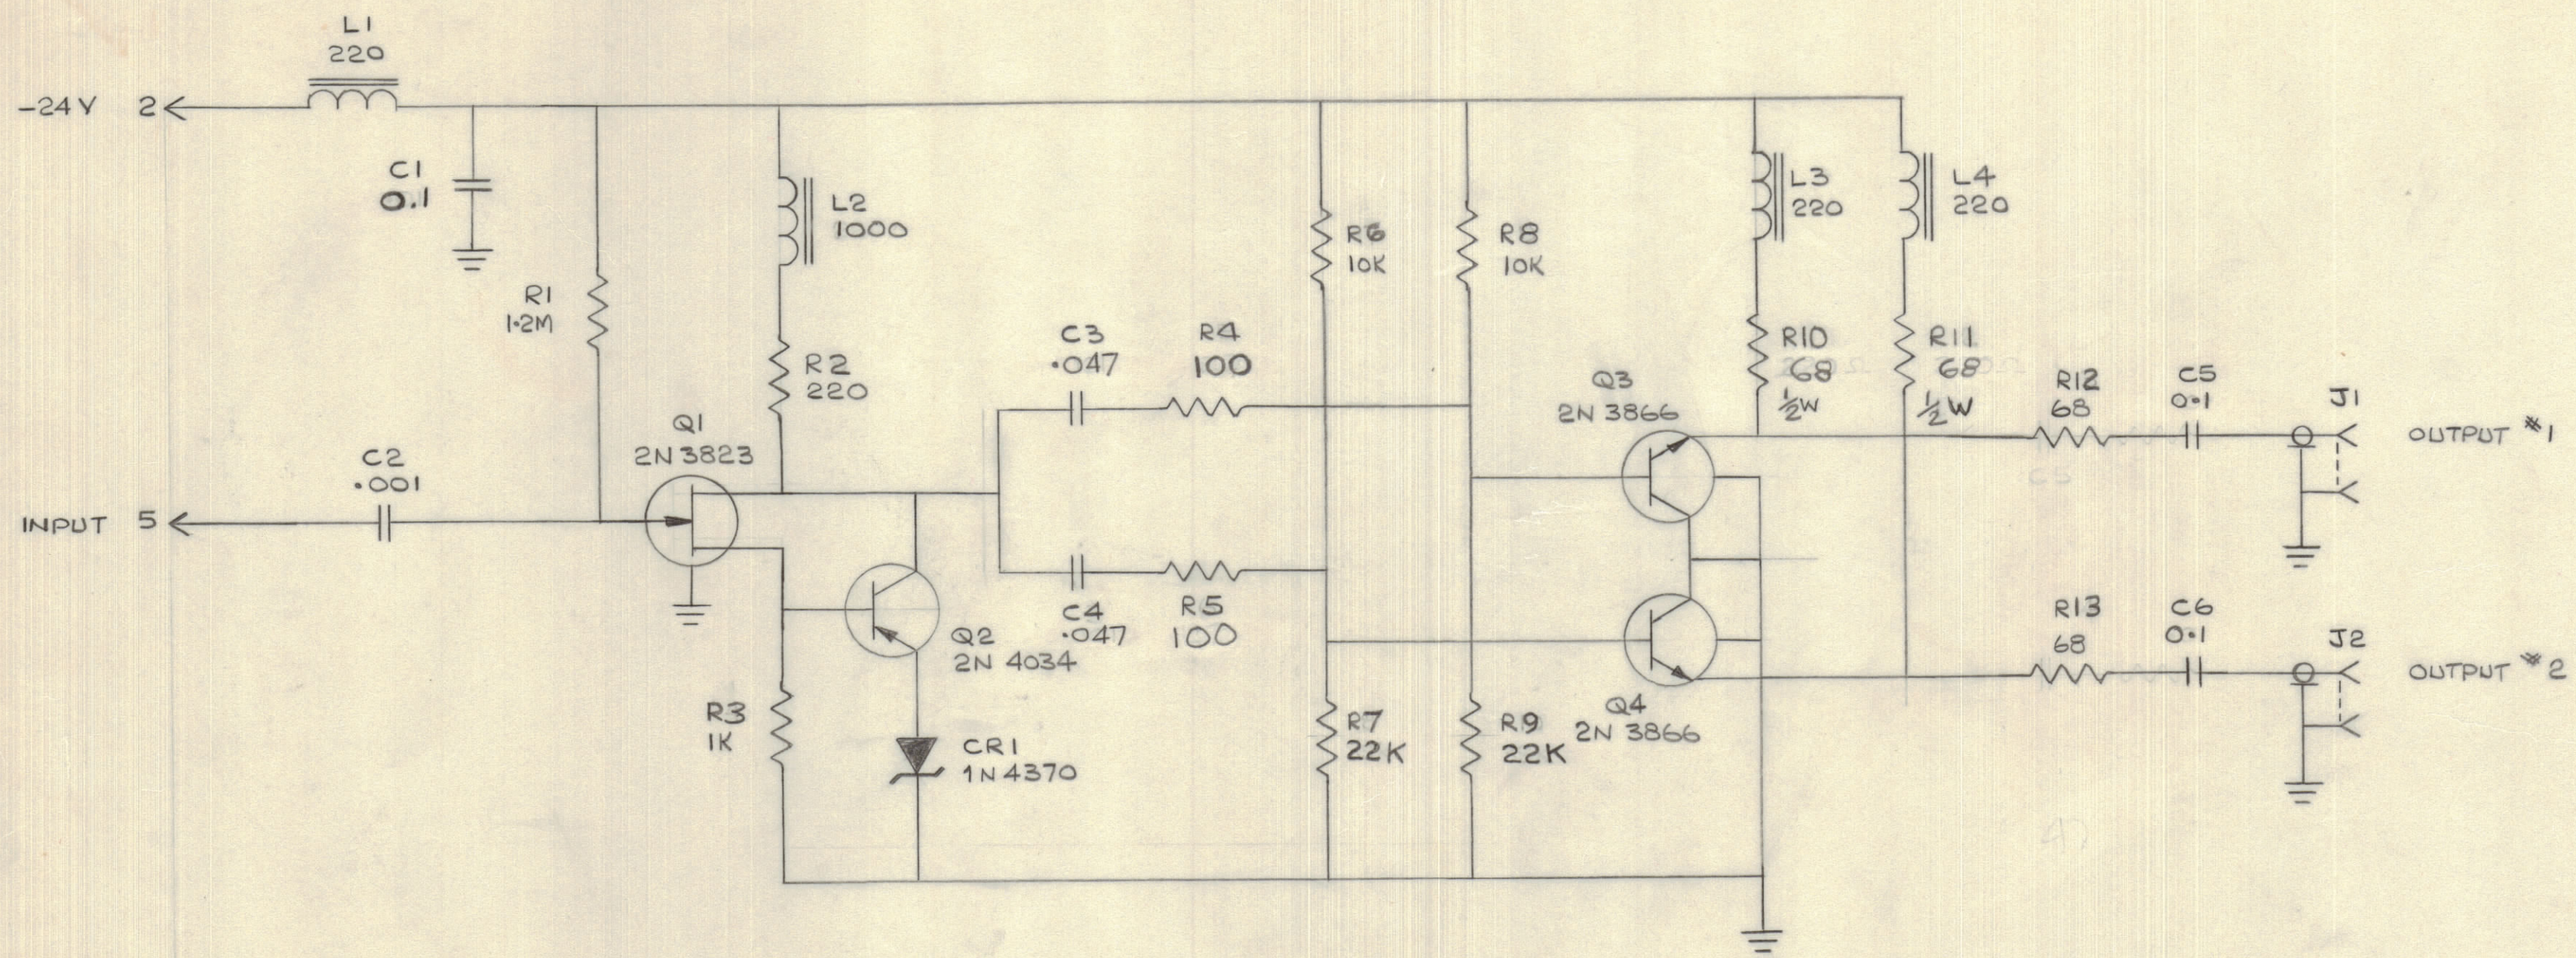

CK 10558 C

UNLESS OTHERWISE STATED:  
 RESISTANCE IN OHMS - 25 WATT.  
 CAPACITANCE IN MMF  
 INDUCTANCE IN MH

TOLERANCES		SCALE:
ALL	DEC. DIM. ± .05	DRILL, PUNCH, COMMERCIAL STOCK
OTHERS	FRAC. DIM. ± 1/64 .XX ± .01	SIZES AND MANUFACTURERS
	ANGULAR DIM. ± 0° 30'	TOLERANCES ARE NOT INCLUDED.

AX 10041	070/68	20 JAN 1968
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED	
MATERIAL		OTTAWA ONTARIO	
WEIGHT PER PC.		SCHEMATIC	
TYPE & TEMPER.		OUTPUT MODULE 75 Ω	
HEAT TREAT. SPEC.		JW	KH
FINISH & SPEC. NO.		DRAWN	ELEC. DES. APP.
		CHECKED	FINAL APPROVAL
		CK 10558 C	