



IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.					DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
0		REL TO PROD	JULY 17/68		AP		AG.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

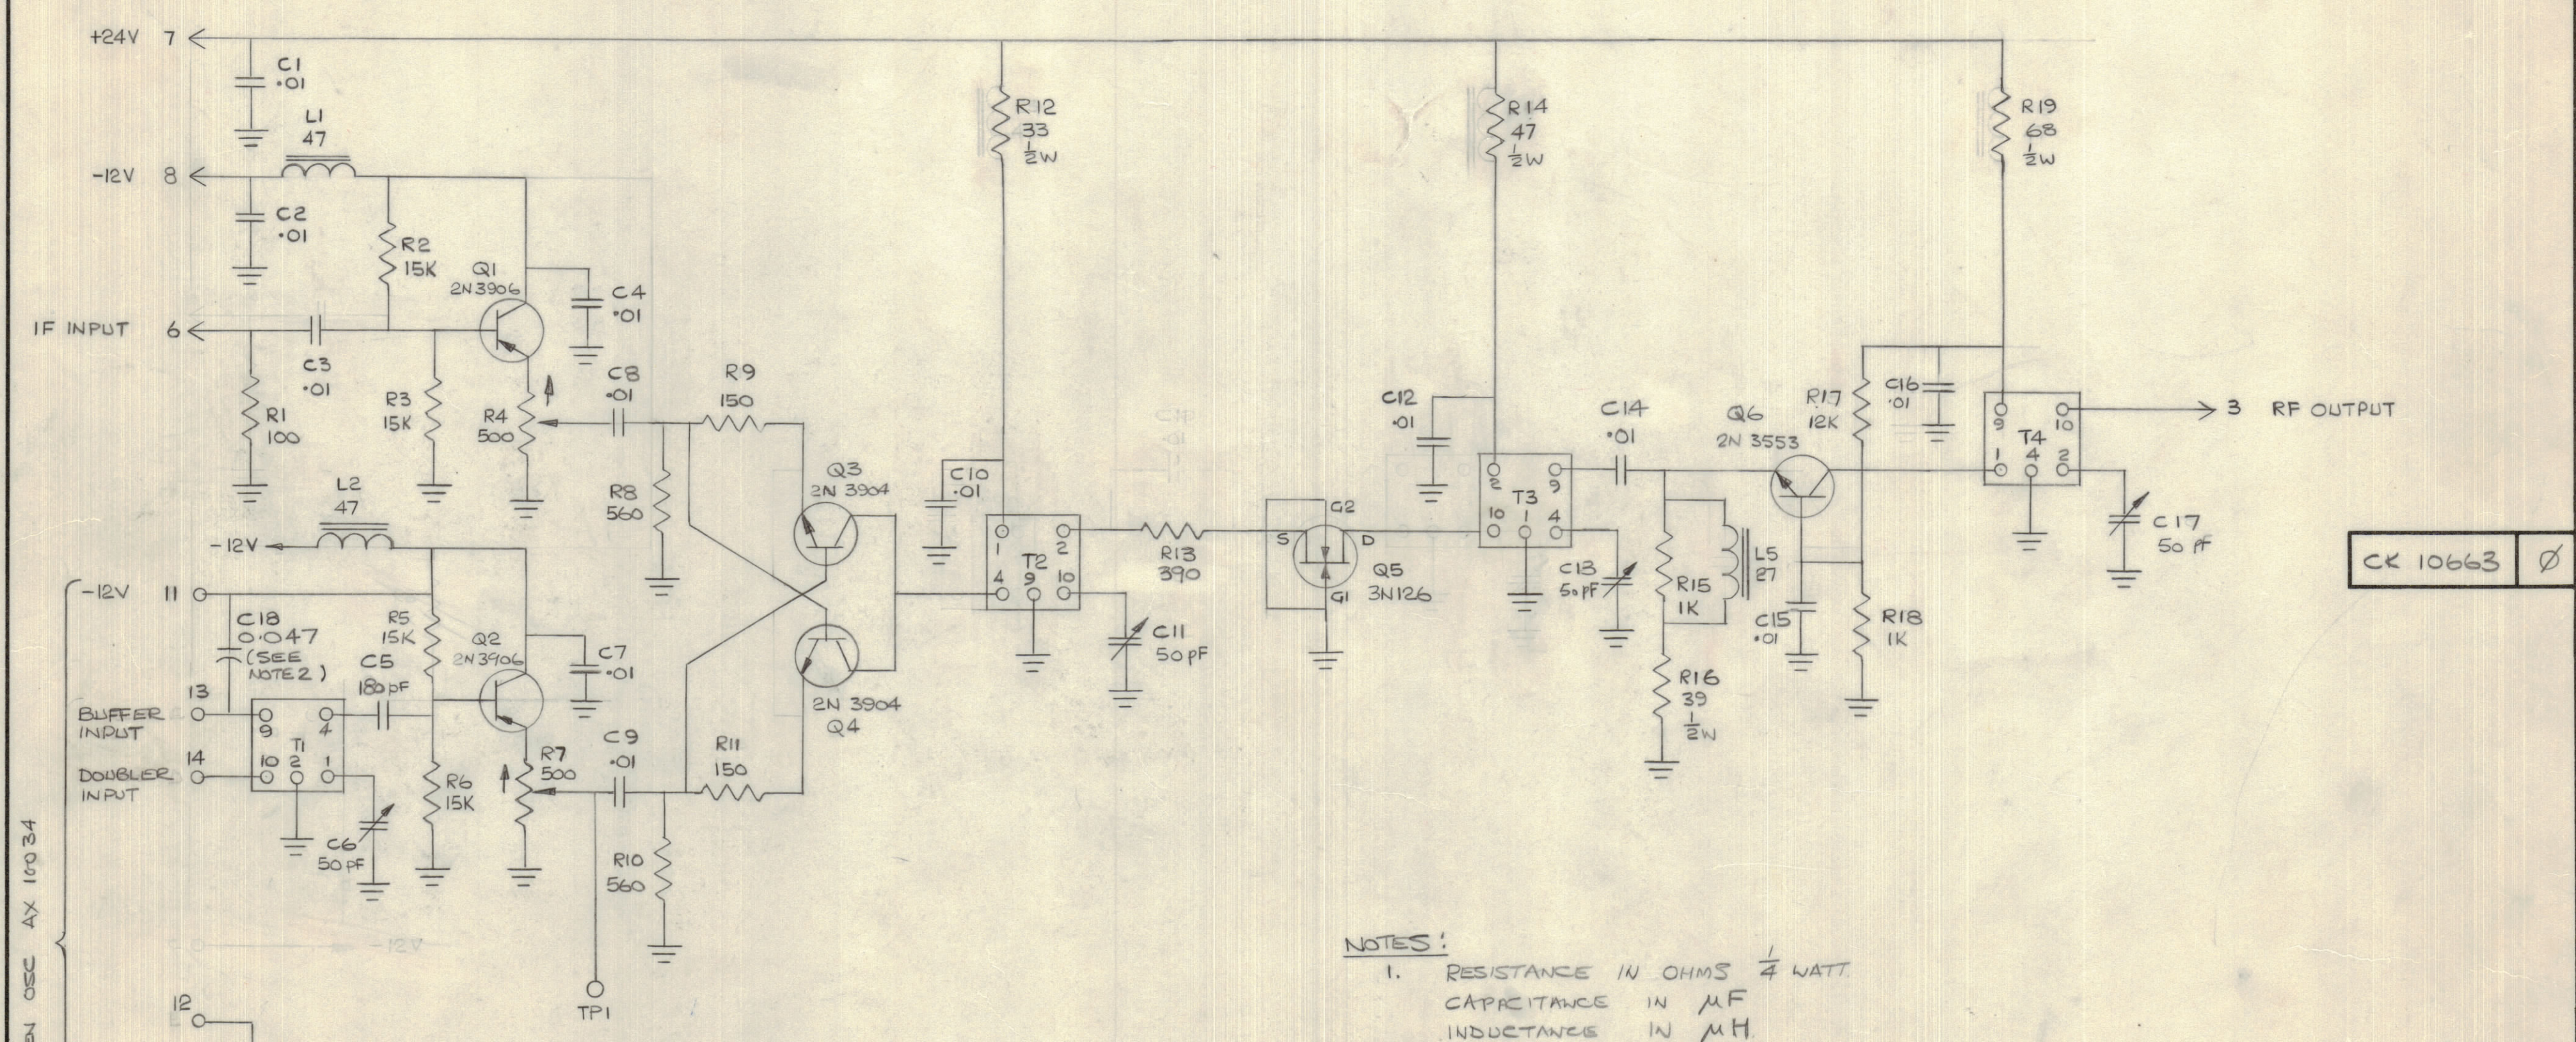

CK 10663 0

- NOTES:
1. RESISTANCE IN OHMS $\frac{1}{4}$ WATT. CAPACITANCE IN μ F. INDUCTANCE IN μ H.
 2. C18 IS IN THE CIRCUIT FOR 16-32 MHZ OPERATION ONLY.

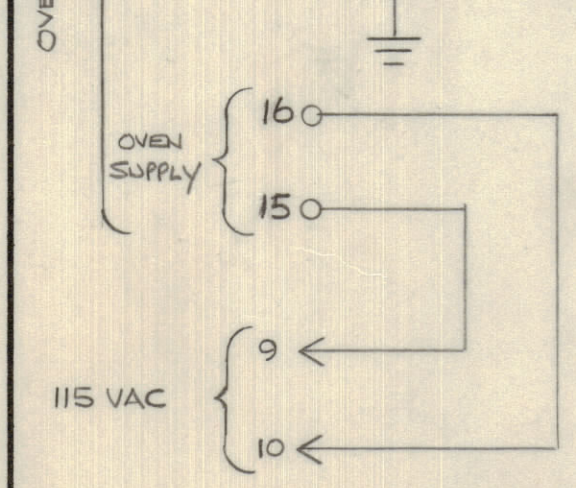

TOLERANCES		SCALE:
DEC. DIM. \pm	.X*.08	DRILL, PUNCH, COMMERCIAL STOCK
FRAC. DIM. \pm	.XX*.01	SIZES AND MANUFACTURERS
ANGULAR DIM. \pm	.XXX*.005	TOLERANCES ARE NOT INCLUDED.

TTRT () E	059/68	2 FEB 68
MODEL	PROJECT NO.	ASS'Y. NO.
		DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		SCHEMATIC	
WEIGHT PER PC.		XMIT MODULE	
TYPE & TEMPER.	DRAWN	ELEC. DES. APP.	MECH. DES. APP.
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL	
FINISH & SPEC. NO.		CK 10663 0	